

CQ

February 1960

50¢

UNIVERSITY OF ILLINOIS
LIBRARY

FEB 1 1960

CHICAGO

First International Convention ... New York!



The Radio Amateur's Journal



GOOD REASONS FOR ADVANCED SSB PERFORMANCE IN **COLLINS** **S/Line**

FREQUENCY STABILITY

MECHANICAL FILTERS

AUTOMATIC LOAD CONTROL

RF FEEDBACK

ONE KC DIVISION ON ALL BANDS

MORE QSO'S PER KC

DUAL OR SINGLE PTO CONTROL

OPERATING AND FRONT PANEL SIMPLICITY

LIGHTWEIGHT

COMPLETE STATION COMPATIBILITY

Collins Mechanical Filter sideband generation has two steep sided skirts with a bandwidth at the 60:6 db points. It assures clean voice signals without additional audio filters.


RF feedback around driver and PA stage improves linearity, reduces distortion products, giving cleanest signal on the air.

A flick of a switch selects a single control for transceiver operation, or you can transmit and receive on separate controls. Highly stable permeability tuned oscillator gives positive indication and the best frequency calibration available.

Modern, compact design makes the Collins S/Line easy to move and assemble. It's light enough to carry along on a field on weekend trips, vacations — or anywhere you want improved SSB communications.

These are the outstanding features that make Collins S/Line the advanced system for amateurs. For maximum talking power and greatest operating convenience specify Collins S/Line. See the complete S/Line on display at your Collins distributor.

For further information, check number 1 on page 126.

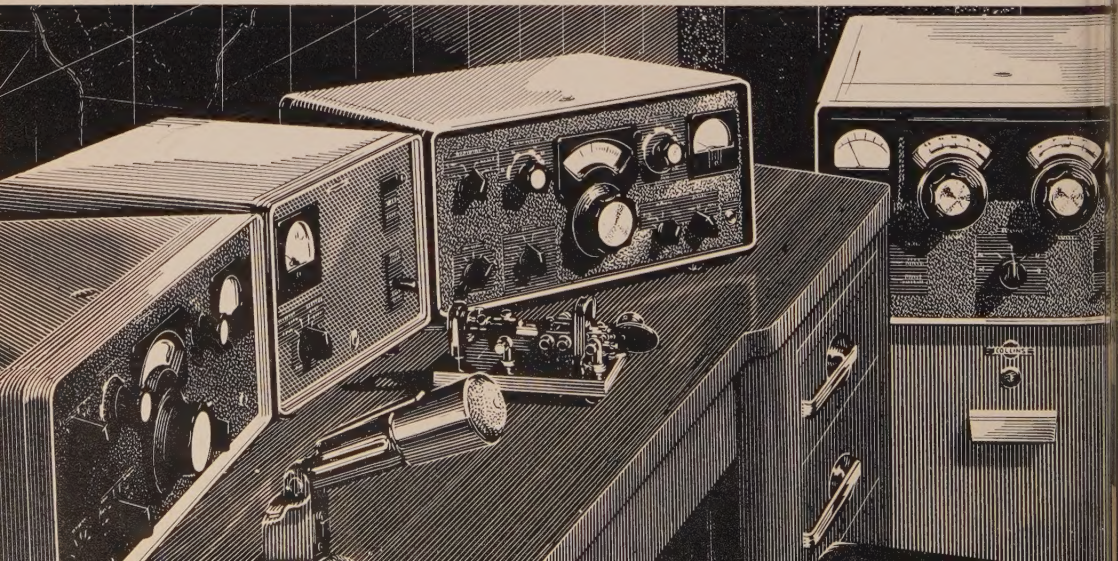

It pays to insist on **PR crystals**

STANDARD OF EXCELLENCE SINCE 1934

AMATEUR TYPES

40, 80 and 160 Meters, PR Type Z-2

Rugged. Low drift, fundamental oscillators. High activity and power output. Stands up under maximum crystal currents. Stable, long-lasting, hermetically sealed; ± 500 cycles..... **\$2.95 Net**

24 to 27 Mc., PR Type Z-9A

Third overtone; multiplies into either 2-meter or 6-meter band; hermetically sealed; calibrated 24 to 27 Mc., ± 3 Kc.; .050" pins.

\$4.95 Net

COMMERCIAL TYPES

Commercial Crystals available from 100 Kc. to 70 Mc. Prices on Request.

SPECIAL TYPES

Type Z-1 Aircraft

3023.5 Kc., .005 %.....**\$3.45 Net**

VHF Type Z-9R, Aircraft

For Lear, Narco and similar equipment operating in the 121 Mc. region, requiring crystals in 30 Mc. range. Each.....**\$4.95 Net**

Type Z-1, MARS and CAP

Official assigned frequencies in the range. Calibrated to .005%. 1600 to 10000 Kc.....**\$3.45 Net**

Type Z1, TV Marker

Channels 2 thru 13.....**\$6.45 Net**

4.5 Mc. Inter-carrier,

.01 %.....**\$2.95 Net**

5.0 Mc. Signal Generator,

.01 %.....**\$2.95 Net**

10.7 Mc. FM, IF,

.01 %.....**\$2.95 Net**

TYPE Z-9R CITIZENS BAND CLASS "D"

FCC assigned frequencies in megacycles: 26.965, 26.975, 26.985, 27.005, 27.015, 27.025, 27.035, 27.055, 27.065, 27.075, 27.085, 27.105, 27.115, 27.125, 27.135, 27.155, 27.165, 27.175, 27.185, 27.205, 27.215, 27.225; calibrated to .005%. (Be sure to specify manufacturer of equipment)..... **\$2.95 Net**

TYPE Z-9R RECEIVER CRYSTALS FOR CITIZENS BAND CLASS "D"

Specify I.F. frequency, also whether I.F. is above or below transmitter frequency. Calibrated to .005%. (Be sure to specify manufacturer of equipment)..... **\$2.95 Net**

TYPE Z-9R RADIO CONTROL CLASS "C"

FCC assigned frequencies in megacycles: 26.995, 27.045, 27.095, 27.145, 27.195, 27.255; calibrated to .005%. (Be sure to specify manufacturer of equipment)..... **\$2.95 Net**

Type Z-6A, Frequency Standard

To determine band edge. To keep the VFO and receiver properly calibrated.

100 Kc. .. **\$6.95 Net**



Z-6A

PR Type 2XP

able for converters, experimental, etc. Same holder dimensions as Type Z-2.

0 to 12000 Kc., (Fund.) ± 5 Kc.....**\$3.45 Net**

01 to 25000 Kc. (3rd Overtone) ± 10 Kc.....**\$4.45 Net**

PR CRYSTALS ARE UNCONDITIONALLY GUARANTEED. ORDER FROM YOUR JOBBER.

PETERSEN RADIO CO., Inc. 2800 W. Broadway
COUNCIL BLUFFS, IOWA


EXPORT SALES: Royal National Corporation, 250 W. 57th Street, New York 19, N. Y., U. S. A.

For further information, check number 3 on page 126.

Designed for



Application

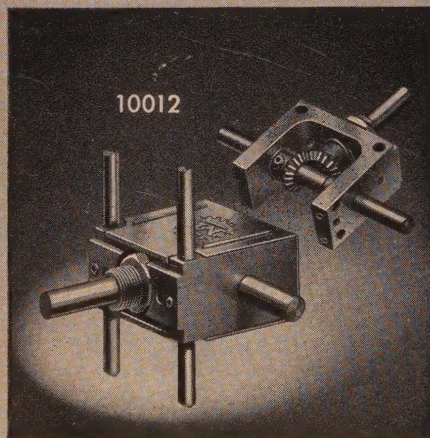

10012

The No. 10012

RIGHT ANGLE DRIVE

"Designed for Application." Extremely compact. Case size is only $1\frac{1}{2}'' \times 1\frac{1}{2}'' \times \frac{3}{4}''$. Uses bevel gears. Mounts on adjustable "standoff rods," single hole panel bushing or tapped holes in frame. Ideal for operating switches, potentiometers, etc., that must be located, for short leads, in remote parts of chassis.

JAMES MILLEN MFG. CO., INC.

MAIN OFFICE AND FACTORY
MALDEN
MASSACHUSETTS



Wayne Green, W2NSD *editor*
Barry Briskman, K2IEG *assistant editor*

department editors

Bob Adams, W3SW *sideband*
Frank Anzalone, WIWY *contest calendar*
Lee Aurick, W2QEX *citizens radio*
Urban Le June Jr., W2DEC *dx*
Ken Grayson, W2HDM *surplus*
Sam Harris, W1FZJ *vhf*
George Jacobs, W3ASK *propagation*
Byron Kretzman, W2JTP *rtty*
Marvin Lipton, VE3DQX *club bulletins*
Louisa Sando, W5RZJ *yl*
Charles Schauers, W6QLV *ham clinic*
Don Stoner, W6TNS *novice & semiconductor*

contributing editors

E. L. Klein, W4UHN *printed circuits*
Norman McLaughlin, W3LNT *grounded grids*

CQ, the Radio Amateurs' Journal is published for active hams by active hams. Not affiliated with any clubs or other political groups, CQ endeavors to be a true and honest reporter for those interested in the hobby. Suggestions for improvement are welcomed.

Authors would do well to send for the CQ Style sheet which will explain our confused system of abbreviations and symbols. The article "Author Author" (October 1956 CQ) tells all about how to write articles for CQ, how much we pay, etc. Reprints of this article are available from CQ if you have been improvident in keeping up your radio library.

CQ CERTIFICATES:

The WPX Award is granted for two-way contact with a certain number of amateurs in different prefixes of the world. Full details are contained in the WPX Record Book which is available for 15c from CQ. Application forms are free.

The WAZ Award is granted for contacting all of the amateur zones of the world. Current standings of amateurs working for this award will be found in the DX column. A DX Zone map of the world is available free from CQ. Send stamped envelope.

Special SB Certificates are available from the Sideband Department for operators providing proof of contact (QSL cards) with stations in 50, 75 and 100 countries using two-way sideband. Send cards directly to the Editor.

TECHNICAL INFORMATION:

Please check the 11-year cumulative index which was published in the January 1956 CQ for information about articles in past issues of CQ. The December 1956 to 1967 CQ yearly indexes will bring you up to date. Most back issues are available at \$1 from us. Check our "Back Issues" ad for details on those not available. Reprints of the Cumulative Index are available free. For further information see the Ham Clinic column.

DISCLAIMER:

The authors and editors do the best they can to make everything as correct as possible in the articles. If for any reason any of them should happen to goof we hasten to point out that everything is experimental and we guarantee nothing.

CQ—The Radio Amateur's Journal

February 1960
vol. 16, no. 2

300 West 43rd Street, New York 36, N. Y.

A Viking II And An SB-10 Together.....	A. DeBruycker, W2YGW	30
Ham Shackles.....	P. Karrol	35
Converter IF Amplifier.....	D. A. Smith, W3UZN	36
The Drift Transistor Exposed.....	D. Stoner, W6TNS	37
23 Million A Year.....	R. L. Gale, W1BD	38
Coax Wavemeter For 300 to 2000 MC.....	W. Massey, W4CEL	40
Transistorized 1/2 Gallon Power Supply.....	M. Gellman, K2CBO	42
ESP.....	R. A. Garlin, W3BCZ	44
Keying Monitor.....	W. Williams, K5ILG	
	B. Hirsch, K5ITB	45
Pan Scope.....	L. I. Hutton, WØRQF	46
Audio Peak Limiting.....	H. S. Holzer, K6RAN	48
DSB Command Conversion.....	R. G. Fenner, W5AVI	50
Modifying 1625's and 807's For Linears.....	C. A. Morgan, W9LRM	53
6 Meter Transmitter—Transistorized.....	J. J. Sury, K8NIC/5	54
Phone Patch.....	G. Postels, W9SA	56
Two Meter Antenna.....	A. G. Gelineau, W4LEQ	57
The Quad Devilcatcher.....	D. Powell, WØAIN	58
The Heath VFO On 6 and 2.....	D. Gerkin, W6NKN	59
Cathode Operated Relays.....	R. F. Van Wickle, W6TKA	60
Ham Anagram.....	J. A. Comstock	61
Tricks With The 75A-2.....	R. R. Renfro, KP4AMU	62

DEPARTMENTS

Bulletins	9	DJ	64	Amateur Legal Notes	83
Scratchi	10	Ham Clinic	68	Propagation	84
Club Bulletins	12	Novice	71	Citizens Band	85
QSL Contest	14	New Products	74	VHF	86
MARS Bulletins	16	RTTY	75	YL	90
Letters To The Editor	18	Surplus	78	Contest Calendar	92
Announcements	22	Sideband	80		

Cover photo by Richard Matthews, K2011.

Branch Advertising Offices:

Ted E. Schell, 2700 West 3rd Street,
Los Angeles 57, Calif. DUnkirk 2-4889.

Charles W. Hoefer, 1664 Emerson Street,
Palo Alto, Calif. DAvenport 4-2661.

<i>publisher</i>	S. R. Cowan
<i>production manager</i>	Bill Gardner, Jr.
<i>circulation manager</i>	Harold Weisner
<i>editorial production</i>	Robert Jordan
<i>advertising representative</i>	Jack Schneider
<i>advertising representative</i>	Dick Cowan
<i>classified advertising</i>	Kathi Gerace

CQ—(title registered U. S. Post Office) is published monthly by Cowan Publishing Corporation. Executive and editorial offices at 300 West 43rd Street, New York 36, N. Y. Telephone JUdson 2-4460. Second-class Postage paid at New York, N. Y.


SUBSCRIPTION RATES: U. S. A. and Possessions, APO, FPO, Canada and Mexico; one year \$5.00; two years \$9.00; three years \$13.00. In-American and foreign: one year \$6.00; two years \$11.00; three years \$16.00.

FOREIGN SUBSCRIPTIONS: Great Britain: RSCB, New Ruskin House, Little Russell St., London WC 1, England. Australia: Technical Book Co., 297 Swanston St., Melbourne C 1, Victoria, Australia.

Printed in U. S. A. Entire contents copyright 1960 by Cowan Publishing Corporation. CQ does not assume responsibility for solicited manuscripts.

Postmaster: Send Form 3579 to CQ, 300 West 43rd Street, New York, N. Y.

BUILD YOUR OWN



HAM GEAR




HEATHKIT HAM EQUIPMENT
IS DESIGNED BY HAMS
WHO KNOW YOUR
PROBLEMS AND
NEEDS.

PROVEN, "ON THE AIR"
PERFORMANCE



"SENECA" VHF HAM TRANSMITTER KIT

Beautifully styled and a top performer of highest quality throughout. The "Seneca" is a completely self-contained 6 and 2 meter transmitter featuring a built-in VFO for both 6 and 2 meters, and 4 switch-selected crystal positions, 2 power supplies, 5 radio frequency stages, and 2 dual-triode audio stages. Panel controls allow VFO or crystal control, phone or CW operation on both amateur bands. An auxiliary socket provides for receiver muting, remote operation of antenna relay and remote control of the transmitter such as with the Heathkit VX-1 Voice Control. Features up to 120 watts input on phone and 140 watts on CW in the 6 meter band. Ratings slightly reduced in the 2 meter band. Ideal for ham operators wishing to extend transmission into the VHF region. Shpg. Wt. 56 lbs.

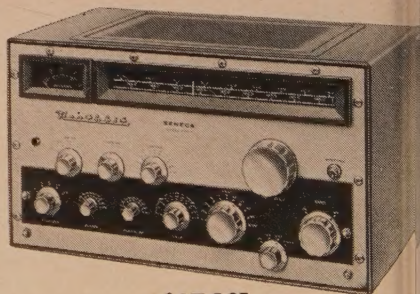

HEATHKIT VHF-1 **\$159⁹⁵**



HEATHKIT DX-20 **\$35⁹⁵**

DX-20 CW TRANSMITTER KIT

Designed exclusively for CW work, the DX-20 provides the novice as well as the advanced-class CW operator with a low cost transmitter featuring high operating efficiency. Single-knob bandswitching covers 80, 40, 20, 15 and 10 meters using crystals or an external VFO. Pi network output circuit matches antenna impedances between 50 and 1,000 ohms. Employs single 6DQ6A tube in the final amplifier stage for plate power input of 50 watts. A 6CL6 serves as the crystal oscillator. The husky power supply uses a heavy duty 5U4GB rectifier and top-quality "potted" transformer for long service life. Easy-to-read panel meter indicates final grid or plate current selected by the panel switch. Complete RF shielding to minimize TVI interference. Easy-to-build with complete instructions provided. Shpg. Wt. 19 lbs.

HEATH COMPANY Benton Harbor, Michigan



a subsidiary of Daystrom, Inc.

Mobile Gear...for the Ham on the Go!

"CHEYENNE" MOBILE HAM TRANSMITTER KIT

Fun and excitement . . . plus the convenience of mobile operation are yours in the new Heathkit "Cheyenne" transmitter. The neat, compact, and efficient circuitry provides you with high power capability in mobile operation, with low battery drain using carrier controlled modulation. All necessary components are supplied by the model MP-1 described below. Covers 10, 20, 15 and 10 meters with up to 90 watts input on 10 meters. Features built-in VFO, modulator, 4 RF stages, with push-to-talk final amplifier and pi network (coaxial) output coupling. High quality components are used for long service life and reliable operation, along with rugged chassis construction to withstand mobile vibrations and shock. Thoughtful circuitry provides for ease of assembly with complete instructions and detailed pictorial diagrams to insure success. A spotting meter is also provided. A specially designed ceramic microphone is included to insure effective modulation with plenty of "ch". Plan now to enjoy the fun of mobile operation by getting this superb transmitter. Shpg. Wt. 19 lbs.



HEATHKIT MT-1

\$99⁹⁵



"COMANCHE" MOBILE HAM RECEIVER KIT

Everything you could ask for in modern design mobile gear is included in the "Comanche" . . . handsome styling, rugged construction, top quality components . . . and, best of all, a price you can afford. The "Comanche" is an 8-tube superhetrodyne ham band receiver operating AM, CW and SSB on the 80, 40, 20, 15 and 10 meter amateur bands. A 3 mc crystal lattice-type IF filter permits the receiver to use single conversion without image interference, and at the same time provides a steep sided 3 kc flat top IF bandpass characteristic comparable to mechanical type filters. The neat, compact and easy-to-assemble circuitry features outstanding sensitivity, selectivity and selectivity on all bands. Circuit includes an RF converter, 2 IF stages, 2 detectors, noise limiter, 2 audio amplifier stages and a voltage regulator. Sensitivity is better than 1 microvolt on all bands and signal-to-noise ratio is better than 10 db at 1 microvolt input. One of the finest investments you can make in mobile gear. Shpg. Wt. 19 lbs.




HEATHKIT MR-1

\$119⁹⁵

MOBILE SPEAKER KIT

A matching companion speaker for the "Comanche" mobile receiver. Housed in a rugged steel case with brackets provided for easy installation on fire wall or under dashboard, etc. Uses 8 ohm speaker with 8 ohm voice coil. Measures 5" H. x 5" W. x 4" D. Shpg. Wt. 4 lbs.



HEATHKIT AK-7

\$5⁹⁵




HEATHKIT AK-6

\$4⁹⁵

HEATHKIT MP-1

\$44⁹⁵



MOBILE POWER SUPPLY KIT

A heavy duty transistor power supply furnishes all the power required to operate both the MT-1 Transmitter and MR-1 Receiver. It features two 2N442 transistors in a push-pull cycle switching circuit, supplying a full 120 watts of DC power. Under intermittent operation it will deliver up to 150 watts. Kit contains everything required for complete installation, including 12' of heavy battery cable, tap-in studs for battery posts, power plug and 15' of connecting cable. Chassis size is 9 1/16" L. x 4 3/4" W. x 1 1/2" H. Operates from 12-14 volt battery source. Circuit convenience provided by self-contained relay which provides push-to-talk mobile operation. Shpg. Wt. 8 lbs.

MOBILE BASE MOUNT KIT


The AK-6 Base Mount is designed to hold both transmitter and receiver conveniently at driver's side. Universal mounting bracket has adjustable legs to fit most automobiles. Shpg. Wt. 5 lbs.


POWER METER KIT

This handy unit picks up energy from your mobile antenna and indicates when your transmitter is tuned for maximum output. A variable sensitivity control is provided. Features a strong magnet on a swivel-mount for holding it on a car dashboard or other suitable spot. Has its own antenna or may be connected to existing antenna. Sensitive 200 ua meter. Shpg. Wt. 2 lbs.

HEATHKIT PM-2

\$12⁹⁵




HEATHKIT

COMPANION UNIT



HEATHKIT TX-1 **\$234⁹⁵**

"APACHE" HAM TRANSMITTER KIT

The many features and modern styling of the "Apache" will provide you with just about everything you could ask for in transmitting facilities. Emphasizing high quality the "Apache" operates with a 150 watt phone input and 180 watt CW input. In addition to CW and phone operation, built-in switch selected circuitry provides for single-sideband transmission using the SB-10 External adapter. The newly designed, compact and standard VFO provides low drift frequency control necessary for SSB transmission. A slide rule type illuminated rotating VFO dial with full gear drive vernier tuning provides ample bandspread and precise frequency setting. The bandswitch allows quick selection of the amateur bands on 80, 40, 20, 15 and 10 meters. This unit also has adjustable low-level speech clipping and a low distortion modulator stage employing two of the new 6CA7/EL34 tubes in push-pull class AB operation. Time sequence keying is provided for "chirpless" break-in CW operation. The final amplifier is completely shielded for TVI protection and neutralized for greater stability. A cooling fan is also provided. The formed one-piece cabinet with convenient access hatch provides accessibility to tubes and crystal sockets. Die-cast aluminum knobs and control panel escutcheons add to the attractive styling of the transmitter. Pi network output coupling matches antenna impedances between 50 and 72 ohms. A "spotting" push button enables the operator to "zero beat" an incoming frequency without putting the transmitter on the air. Equip your ham shack now for top transmitting enjoyment with this outstanding unit. Shpg. Wt. 110 lbs. Shipped motor freight unless otherwise specified.



HEATHKIT SB-10

SINGLE SIDEBAND ADAPTER KIT

\$89⁹⁵

Designed as a compatible plug-in adapter unit for the TX-1 "Apache" transmitter, this unit enables you to operate on SSB at a minimum of cost, yet does not affect the normal AM and CW functions of the transmitter. By making a few simple circuit modifications, the DX-100 and DX-100-B transmitters can be used, utilizing all existing RF circuitry. Extremely easy to operate and tune, the adapter employs the phasing method for generating a single-sideband signal, thus allowing operation entirely on fundamental frequencies. The critical audio phase shift network is supplied completely preassembled and wired in a sealed plug-in unit. Produces either a USB, LSB or F signal, with or without carrier insertion. Covers 80, 40, 20, 15 and 10 meter bands. An easy-to-read panel meter indicates power output to aid in tuning. A built-in electronic voice control switch circuit is also provided. 10 watts PEP output. Unwanted sideband suppression in excess of 30 db and carrier suppression is in excess of 40 db. An EL84/6BQ5 tube is used. linear RF output. Shpg. Wt. 12 lbs.

MODIFICATION KIT: Modifies DX-100 and DX-100-B for use with the SB-10 Adapter. Model MK-1. Shpg. Wt. 1 lb. **\$8.95.**



HEATHKIT AR-3


\$29⁹⁵

(less cabinet)

ALL-BAND RECEIVER KIT

A fine receiver for the beginning ham or short wave listener, designed for high circuit efficiency and easy construction. Covers 550 kc to 30 mc in four bands clearly marked on a slide-rule dial. Transformer operated power supply. Features include: bandswitch, bandspread tuning, phone-standby-CW switch, phone jack, antenna trimmer, noise eliminator, RF gain control and AF control. Shpg. Wt. 12 lbs.

CABINET: Opt. extra. No. 91-15A. Shpg. Wt. 5 lbs. **\$4.95.**



HEATHKIT QF-1

\$9⁹⁵


"Q" MULTIPLIER KIT

Useful on crowded phone and CW bands, this kit adds selectivity and signal rejection to your receiver. Use it with any receiver having an IF frequency between 450 and 460 kc that is not AC-DC type. Provides an effective "Q" of approximately 4,000 for extremely sharp "peak" or "null". The QF-1 is powered from the receiver with which it is used. Shpg. Wt. 3 lbs.

F DISTINCTIVE QUALITY

CESSORY EAKER KIT

autifully designed and color
d to match the "Mohawk"
ver this heavy duty 8"
er with 4.7 ounce magnet
ides excellent tone quality.
ined in attractive 3/4" ply-
d cabinet with perforated
il grille. Speaker impe-
d is 8 ohms. Shpg. Wt. 7 lbs.



HEATHKIT AK-5

\$9⁹⁵



HEATHKIT RX-1

\$274⁹⁵

"MOHAWK" HAM RECEIVER KIT

ed to match the "Apache" transmitter the "Mohawk" ham band receiver provides all the functions re-
ed for clear, rock-steady reception. Designed especially for ham band operation this 15-tube receiver
ares double conversion with IF's at 1682 kc and 50 kc and covers all the amateur frequencies from 160
ugh 10 meters on 7 bands with an extra band calibrated to cover 6 and 2 meters using a converter. Spe-
y designed for single sideband reception with crystal controlled oscillators for upper and lower sideband
nition. A completely preassembled wired and aligned front end coil bandswitch assembly assures ease of
struction and top performance of the finished unit. Other features include 5 selectivity positions from 5 kc
000 CPS, bridge T-notch filter for excellent heterodyne rejection, and a built-in 100 kc crystal calibrator.
set provides a 10 db signal-to-noise ratio at less than 1 microvolt input. Each ham band is separately
perated on a rotating slide rule dial to provide clear frequency settings with more than ample bandspread.
ent panel features S-meter, separate RF, IF and AF gain controls, T-notch tuning, T-notch depth, ANL,
C, BFO, Bandswitch tuning, antenna trimmer, calibrate set, calibrate on, CW-SSB-AM, receive-standby,
er-lower sideband, selectivity, phone jack and illuminated gear driven vernier slide rule tuning dial.
tively styled with die-cast aluminum control knobs and escutcheons. No external alignment equipment
quired for precise calibration of the "Mohawk". All adjustments are easily accomplished using the unique
hod described in the manual. An outstanding buy in a communications receiver. Shpg. Wt. 66 lbs. Shipped
or freight unless otherwise specified.



HEATHKIT AM-2

\$15⁹⁵

REFLECTED POWER METER KIT

AM-2 measures forward and reflected power or standing
ratio. Handles a peak power of well over 1 kilowatt of
y and covers 160 through 6 meters. Input and output
dence provided for 50 or 75 ohm lines. No external power
red for operation. Use it also to match impedances
en exciters or RF sources and grounded grid amplifiers.
Wt. 3 lbs.



HEATHKIT VX-1


\$23⁹⁵

ELECTRONIC VOICE CONTROL KIT

inate hand switching with this convenient kit. Switch from
ver to transmitter by merely talking into your microphone.
tivity controls allow adjustment to all conditions. Power
ly is built in and terminal strip on the rear of the chassis
mmodates receiver and speaker connections and also a
volt antenna relay. Shpg. Wt. 5 lbs.

BALUN COIL KIT

Match unbalanced coaxial
lines, found on most modern
transmitters, to balanced lines
of either 75 or 300 ohms im-
pedance with this handy
transmitter accessory. Cap-
able of handling power input
up to 200 watts, the B-1 may
be used with transmitters and
receivers covering 80 through
10 meters. No adjustment re-
quired. Shpg. Wt. 4 lbs.



HEATHKIT B-1

\$8⁹⁵



HEATHKIT VF-1

\$19⁵⁰

VFO KIT

Far below the cost of crystals to
obtain the same frequency cov-
erage this variable frequency
oscillator covers 160, 80, 40, 20,
15 and 10 meters with three
basic oscillator frequencies. Pro-
viding better than 10 volt aver-
age RF output on fundamen-
tals, the VF-1 is capable of
driving the most modern trans-
mitters. Requires only 250 volts
DC at 15 to 20 ma, and 6.3 VAC
at 0.45 a. Illuminated dial reads
direct. Shpg. Wt. 7 lbs.

Save 1/2 or more...with Heathkits



HEATHKIT DX-100-B \$189⁵⁰

DX-100-B PHONE AND CW TRANSMITTER KIT

A long standing favorite in the Heathkit line, the DX-100-B combines modern styling and circuit ingenuity to bring you an exceptionally fine transmitter at an economical price. Panel controls allow VFO or crystal control, phone or CW operation on all amateur bands up to 30 mc. The rugged one-piece formed cabinet features a convenient top-access hatch for changing crystals and making other adjustments. The chassis is punched to accept sideband adapter modifications. Featured are a built-in VFO, modulator, and power supply, complete shielding to minimize TVI, and a pi network output coupling to match impedances from 50 to 72 ohms. RF output is in excess of 100 watts on phone and 120 watts on CW. Band coverage is from 160 through 10 meters. For operating convenience single-knob bandswitching and illuminated VFO dial on meter face are provided. A pair of 6146 tubes in parallel are employed in the output stage modulated by a pair of 1625's. Shpg. Wt. 107 lbs. Shipped motor freight unless otherwise specified.



HEATHKIT DX-40 \$64⁹⁵

DX-40 PHONE AND CW TRANSMITTER KIT

An outstanding buy in its power class the DX-40 provides both phone and CW operation on 80, 40, 20, 15 and 10 meters. A single 6146 tube is used in the final amplifier stage to provide full 75 watt plate power input on CW or controlled carrier modulation peaks up to 60 watts for phone operation. Modulator and power supplies are built in and single-knob bandswitching is combined with the pi network output circuit for complete operating convenience. Features a D'Arsonval movement panel meter. A line filter and liberal shielding provide for high stability and minimum TVI. Provision is made for three crystals easily accessible through a "trap door" in the back of the cabinet. A 4-position switch selects any of the three crystals or jack for external VFO. Power for the VFO is available on the rear apron of the chassis. Easy-to-follow step-by-step instructions let assembly proceed smoothly from start to finish even for an individual who has never built electronic equipment before. Shpg. Wt. 25 lbs.

Free Send now for latest Heathkit Catalog describing in detail over 100 easy-to-assemble kits for the Hi-Fi fan, radio ham, boat owner and technician.



HEATH

*pioneer in
do-it-yourself
electronics*

COMPANY

BENTON HARBOR 12, MICH.

D a subsidiary of Daystrom, Inc.

Send latest Free Heathkit Catalog.

All prices and specifications subject to change without notice. Please include postage on orders to be shipped parcel post. 20% deposit is required on all C.O.D. orders. All prices are NET F.O.B. Benton Harbor, Mich., and apply to Continental U.S. and Possessions only.

NAME _____

ADDRESS _____

CITY _____

ZONE _____

STATE _____

QUANTITY	KIT NAME	MODEL NO.	PRICE

For further information, check number 5 on page 126.

The 1960 Convention...

NEW YORK

The 1960 Convention will be held in New York City, the first big ham convention to be held in the City in over ten years. There will be extensive programs in every phase of amateur radio, exhibits by virtually every manufacturer in the field, and tours of the feature attractions for out-of-towners: New York City.

In order to take advantage of vacation times, really good weather, and hotel room availability the Convention will be held from August 14th (Thursday-Sunday).

One of the largest hotels in New York was selected for the Convention, the Statler-Hilton Hotel Pennsylvania). The convention will occupy over one complete floor of this huge hotel as well as having the Pent-Top suite for on-the-ham stations.

Now is the time to plan to come to this biggest of ham radio Conventions. Hotel reservation committees will be in operation in June to make you of a place to stay. Foreign amateurs who are interested in visiting, but are short on dollars should get in touch with the Housing Committee which will arrange for them to stay with a local amateur family.

Amateurs in the New York area that are interested in helping with the Convention are requested to drop a card to International Amateur Radio Convention, Inc., 300 W. 43rd St., N.Y. 36, with your name, call, address, and phone number. If you are interested in any specific phase of the Convention, note that too. There is a chance to be an official of the Convention and help ham radio.

Here are some of the committees that are being formed:

Hotel Reservations	DX
Hospitality	VHF-UHF
New York	RTTY
Meals & TV Tickets	Mobile
Publicity & Advertising	Traffic
Technical Program	Novice
Tickets	Technician

Prizes	Television
Exhibits	YL
Liaison Committee	
(MARS, CD Etc.)	Sideband
Transportation	Civil Defense
Code Speed Contests	MARS
FCC Licensing	Antennas & Propagation
Convention Ham	
Station	Old Timers

New Gimmick

Congratulations to PY3ANB, Paulo Eduardo Steinhaus of Sto. Angelo, Brazil for thinking up a new dodge for conning U.S. hams out of dollars. Paulo has been busy sending letters to hams in the Callbook pointing out that he is a collector of money from different countries. He encloses a Brazilian one cruzeiro note in exchange for which he requests the U.S. hams to send one dollar to enrich his collection. This will also enrich Paulo if my pegging the Brazilian note at 1/2¢ is correct. Readers having an irresistible compulsion to send people dollars should be advised that the editor of CQ is also a collector of money, foreign or domestic, makes no never mind.

HARC

Delegates from 20 Hudson Division amateur radio clubs met at New York State Civil Defense Headquarters on December 5th and organized the Hudson Amateur Radio Council, Inc. The Council announced the following goals: 1) They will attempt to found a central headquarters for ham activities in the Hudson Division. 2) They will assist local hams and the FCC. 3) They will see that a hamfest or convention is put on annually in the area. 4) They will remain close liaison with the founder, Mort Kahn, the ARRL Hudson Division Director, to make the needs of ARRL members in the Division known to League Headquarters.

FREE



An FCC License can be Your
Guarantee of Success in Electronics.

Get your FCC Commercial License
— or your money back

The Master Course in Electronics will provide you with the mental tools of the electronics technician and prepare you for a First Class FCC License (Commercial) with a radar endorsement. When you successfully complete the Master Course, if you fail to pass the FCC examination, you will receive a full refund of all tuition payments.



Feenix, Ariz

Deer Hon. Ed:

Getting out your hammer and chisel, on acct. shortly you going to be chiseling Scratchi's name in Hon. Hall of Fame. No kiddings Hon. Ed., Scratchi coming up with gratest idea since invenshun of vacuum tooobs.

You doubting? Then lissening. What are three gratest problums facing radio amchoon today? I'll telling you. They are 1) Not having enuf radio-freakwency spectrum space, and 2) everybuddies sending see-w at to high speed so not everybuddies can reeding, and 3) every buddies wanting to running more power.

Now, Hon. Ed., if I solving all three problums with one peechy, terrific, 1/c idea, you agreeing that Scratchi are having leg up on being Hon. Geenyus? Well, I doing it. Are calling it Scratchi's All Problums Solushun. Yes indeedy, SAPS are the answer.

And another thing, Hon. Ed., to reely showing how grate an idea this is, I thinking it may even be legal. I'm not reel surely, but maybe not even Hon. F.C.C. can objecting.

It all coming to me one day when I having QSO on see-w and I watching the plate current meter bouncing back and forth. You knowing how it is. Even if key-down current being 500 mils, when you sending series of dots, old plate meter just vibrating there at about 200 mil point.

Then I thinking—what happening if just sending one dot. I trying it. Meter only going up to maybe 150 mils. Well, if meter only showing 150 mils plate current, then Scratchi not using full kilowhat. Running 2,000 volts, and 150 mils times 2,000 volts only 300 watts.

I reelizing that key-down having 500 mils and hencely one kilowhat, but honestly now, Hon. Ed., who ever sending see-w with key-down? Just can't having QSO that way.

So, Scratchi desiding to running full kilowhat. Getting much bigger tooobs for final so they drawing lots more current. Loading them up so when sending single dot on bug, plate meter going up to 500 mils. Not knowing how much current being drawn if holding key down, but then, Scratchi not caring. Power supply groaning as it is on one dot. Howsomever, you

[Continued on page 94]

HERE'S PROOF:

Name and Address	License	Time
John H. Johnson, Boise City, Okla.....	1st	20 weeks
Prentice Harrison, Lewes, Del.....	1st	27 weeks
J. A. Niedeck, Bethlehem, Pa.....	2nd	8 weeks

WE CAN PROVIDE NAMES IN YOUR AREA ON REQUEST

EMPLOYERS MAKE OFFERS LIKE THIS:

Letter from nationally-known Airlines: "Radio Operators and Radio Mechanics are needed for our company. Periodic wage increase with opportunity for advancement. Many company benefits."

OUR TRAINEES GET JOBS LIKE THIS:

"Since enrolling with Cleveland Institute I have received my 1st class license, and am now Chief Engineer of Station WAIN. Thanks to the Institute for making this possible."

Lewis M. Owens, Columbia, Ky.



Mail Coupon Today and
Receive all 3 Booklets

FREE



Accredited by National Home Study Council

Cleveland Institute of Radio Electronics
Carl E. Smith, Consulting Engineer, President
Desk CQ-61, 4900 Euclid Ave., Cleveland 3, Ohio

Please send Free Booklets prepared to help me get ahead in Electronics. I have had training or experience in Electronics as indicated below:

- | | |
|---|---|
| ☐ Military | ☐ Broadcasting |
| ☐ Radio-TV Servicing | ☐ Home experimenting |
| ☐ Manufacturing | ☐ Telephone Company |
| ☐ Amateur Radio | ☐ Others |

In what kind of work are you now engaged?.....

In what branch of Electronics are you interested.....

Name Age.....

Address

City Zone..... State.....

Quality in communications equipment is built in three stages. First: *Imaginative design*. Second: *Uncompromising craftsmanship*. Finally—*positive proof of performance*. In the quarter-century since we manufactured our first receiver, the Hallicrafters has earned a world-wide reputation for creative engineering. Behind that reputation is a story, little known and unpublicized, of quality control and performance evaluation unequalled in the industry. Here is where dependability is proven in advance, where the test of time is met *before the equipment leaves the factory* . . .


At hallicrafters the test of time is only part of the story

Quality begins with quality components. Periodic samples of *more than 28,000 parts* are subjected to 100% inspection, rejected if exacting specifications are not met. Thousands of testing procedures are used in this department! Even the laboratory instruments used in our quality control and production procedures are calibrated periodically against the finest known standard devices in our Calibration Laboratory.

Why we shake and bake them. Extra care pays off in the long run. We actually eliminate two common sources of trouble with the unusual procedures shown here. Loose or faulty connections are detected on a shake table. Later, assembled units ride smoothly through an oven where heat far in excess of normal operation actually relaxes and equalizes tensions on all components to insure long term frequency stability.

Measuring VFO frequency drift vs. temperature is the sole function of this entire department. For more than four years, every HT-32 VFO has been subjected to this exacting and critical procedure. Units are placed in oven (center), and frequency drift is automatically plotted over a temperature range from 86° to 175° F. The slightest deviation from standard means rejection. Here's one of many reasons why Hallicrafters transmitters are famous for stability.

Worked for a lifetime in 30 days! In this department samples of daily production are measured against engineering standards by every conceivable operation check—for selectivity, sensitivity, alignment, hum, noise, distortion products, power, etc. Here too is another proving ground for Hallicrafters durability—continuous life tests where equipment is operated at full power for extended periods. These and many other test procedures we've developed over the past 26 years are your guarantee that the new ideas born at Hallicrafters are *proven ideas*.



We'd like to show you the complete story. Won't you drop in next time you're in the neighborhood, Monday through Friday, 8:30 to 5:00 PM?




hallicrafters

4401 West Fifth Avenue, Chicago 24, Illinois







For further information, check number 6 on page 126.

**The
SWITCH
you need
is carried
by your**



Centralab

DISTRIBUTOR



• The extensive CENTRALAB line of high reliability switches includes the unit you need. For ham applications, as well as industrial and military uses, you can depend on CENTRALAB switches. Sub-miniature, miniature, standard and heavy duty; rotary and lever action; ceramic and phenolic—your CENTRALAB distributor has them all. You'll find them listed in CENTRALAB's Catalog 30. If you don't have this catalog, write us or ask your distributor for a free copy.

Centralab

A DIVISION OF GLOBE-UNION, INC.
954H E. KEEFE AVE. • MILWAUKEE 1, WIS.
In Canada: 804 Mt. Pleasant Rd., Toronto, Ont.

SWITCHES • CERAMIC CAPACITORS • PACKAGED ELECTRONIC CIRCUITS
CONTROLS • ENGINEERED CERAMICS • SEMI-CONDUCTOR PRODUCTS

For further information, check number 7 on page 126.

CLUB BULLETINS

Marvin D. Lipton,

311 Rosemary Road, Toronto 10, Ontario, Canada:

Club Meetings


No matter how congenial its members are, a radio club usually will not survive if meetings are not worth-while. This fact is recognized on too well and numerous club executives have written in asking what others in similar positions do to make meetings attractive. In an attempt to answer such questions, I have quoted notices of meetings as they were printed in papers coming to me. In following this procedure, I have selected club bulletins at random and if I have accidentally overlooked an outstanding program of your group please inform me so that I might tell of it in a future column.

"The next program will be a talk by Bob Cooper on the subject of the Long distance Television reception—(F sheet), Stockton A.R.A. Bill's film on antennas, the operation and theory followed by the usual question and answer period proved beneficial to all members—(Key Key) North Bay A.R.C. The next meeting will be a real one. Through the CQ Club Bulletin we have arranged for a colored film of the KC4AF DXpedition.—(CKRC IN) Central Kansas R.C. Dale Dwelley, W6STY, will use a tape recorder with his talk to recount some of the hilarious things that go on in the broadcasting world when people think the mike is off. Dale has worked on 9 BC station (Chewed Rag), Hayward R.C. The biggest affair of the tire year for the CARA is our big annual Christmas Party in the main ball room of the YMCA. Ladies and Gentlemen, Sat. Dec. 19.—(Carascope), Columbus A.R.A. After a business session we will have a film titled The Part An Amateur Radio Operator Plays During A Disaster.—(T Spritzer), Lancaster Radio Trans. Soc. In the Syracuse Museum of Fine Arts over 1000 local members of the Institute of Radio Engineers will pay tribute to four of the world's most famous Old Timers in the development of Electronics.—(Rags Review), R.A. of Syracuse, N.Y. Dr. N. Reddick of the Linde Co. will present a program on the proper use of a scope and will demonstrate its proper application in testing transmitters, receivers, etc.—(Ar Chewer), Indianapolis R.C. Rumor has it that this will be one of the biggest auctions the club has held in years.—(The Yarc-Mitter), Yonkers A.R.C. Carl Mosely was very interesting and the opportunity to see and discuss antennas was welcome.—(County Static), Genesee County R.C. A annual family meeting will feature one of the superlat films prepared for N.B.C. by Bill Hartigan of the WR news staff: "Assault on Antarctica", narrated by Admiral Dufek.—(SARA News), Schenectady A.R.A. Cliff Le G3ISX, gave a repeat performance of "Aerials for Amateur". Graphs, diagrams and models illustrated presentation.—(North Kent Newsletter), North Kent Soc., England. John Gazeley gave a most informative talk on vhf. He dealt with records, demerits of the super regenerative receivers, converters, oscillator circuits, coax line, and tone crystals, lecher lines and rf stages.—(Southgate Newsletter), Southgate Finchley R.S.G.B. Group, England. One of the highlights will be a demonstration and discussion of a transistorized SSB generator by Al, W8BJP.—(The Earl Bolt), Ford A.R. League. The task of laying telephone cables across oceans will be outlined by Harold W. Plant Design Engineer, Long Lines Dept., A.T.T. Co. (QUA), First U.S. Army MARS. Title of the program will be "Stump the Experts". We can have fun and learn at the same time.—(Ham Hum), Ak-Sar-Ben R.C. The program for this meeting consists of a film by the Bell Telephone on transmission lines.—(Ragchew), Nevada A.R.

[Continued on page 94]

IT'S HAMMARLUND... *for SSB at its very best!*

the
ALL-NEW HQ-180
*for general
coverage*

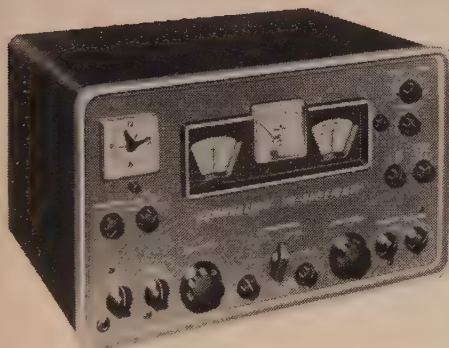

An advanced design 18-tube super-heterodyne receiver with full dial coverage from 540 KCS to 30.0 MCS. Bands spread on all amateur bands within frequency range of receiver.

\$429.00 (Optional clock-timer, \$10.00)

the
PROVED CHAMPION
*of amateur band
receivers—HQ-170*



No amateur receiver has ever gained as fine a reputation as the HQ-170. A 17-tube superheterodyne receiver tuning the 6, 10, 15, 20, 40, 80 and 160 meter amateur bands.

\$359.00 (Optional clock-timer, \$10.00)

Hammarlund shows the way to new standards of performance in SSB with the HQ-170 and HQ-180 receivers. These receivers incorporate the Hammarlund slot filter that allows attenuation up to 60 db for razor-sharp tuning, selectable sideband, selectable IF amplifier tuning, separate product detector, BFO control, crystal calibrator, selectable rates of AVC and other advanced features. Pick the one that suits you best. You can't buy better, or be more satisfied than with a Hammarlund SSB receiver...they're tops!



Established 1910

HAMMARLUND

MANUFACTURING COMPANY, INC.


460 West 34th Street, New York 1, N.Y.

In Canada: White Radio, Ltd., 41 West Ave., N. Hamilton, Ont.




For further information, check number 8 on page 126.

February, 1960 • CQ • 13

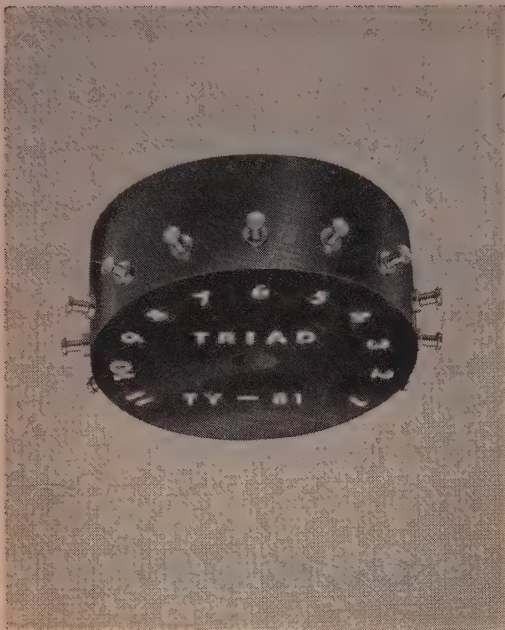

TRIAD boosts efficiency to 90% in transistor power transformers

With system efficiencies as high as 85%, these compact encapsulated Triad toroids have already established a reputation for long, efficient, trouble-free life. Use them to improve your mobile rig. Their quality meets U.S. Government Military Specifications. Ask your distributor or send for free literature today.



Triad is first again with helpful information sheets packed with every Triad transformer you buy. For example, sheets packed with Triad's toroid transistor power transformers show typical circuits, transistor parts lists, and typical rectifier information.



TRIAD TRANSFORMER CORP.



A DIVISION OF LITTON INDUSTRIES

4055 Redwood Avenue, Venice, California
305 No. Briant Street, Huntington, Indiana

For further information, check number 9 on page 126.

QSL contest

Winner



This month's winner was hard to select. There were many, many fine entries. In order to keep our QSL editor employed, however, a decision had to be made. The Lucky winner? Michigan's own Lee Embrey, Jr., W8TQN. Lee's humble (hah!) artistic endeavors will undoubtedly result in a year's FREE CQ. It should be there, Lee, by the time those Canadian Geese get where they're going. Congrats!

Big Losers

As usual, there are some lucky losers too. KØLUB, KN9RXX and Sweden's SM3ATK fill this category with attractive "Almost but not quite" entries. Some consolation tho, an Extra copy of CQ to these lads.

We have lots of subscriptions to give away yet, fellows! Mail us YOUR card pronto. Few think they are winners, but some always are. That someone can be YOU.




KN9RXX




WHO?

Me on the air last night ??



...A 1000 WATT PEEK...

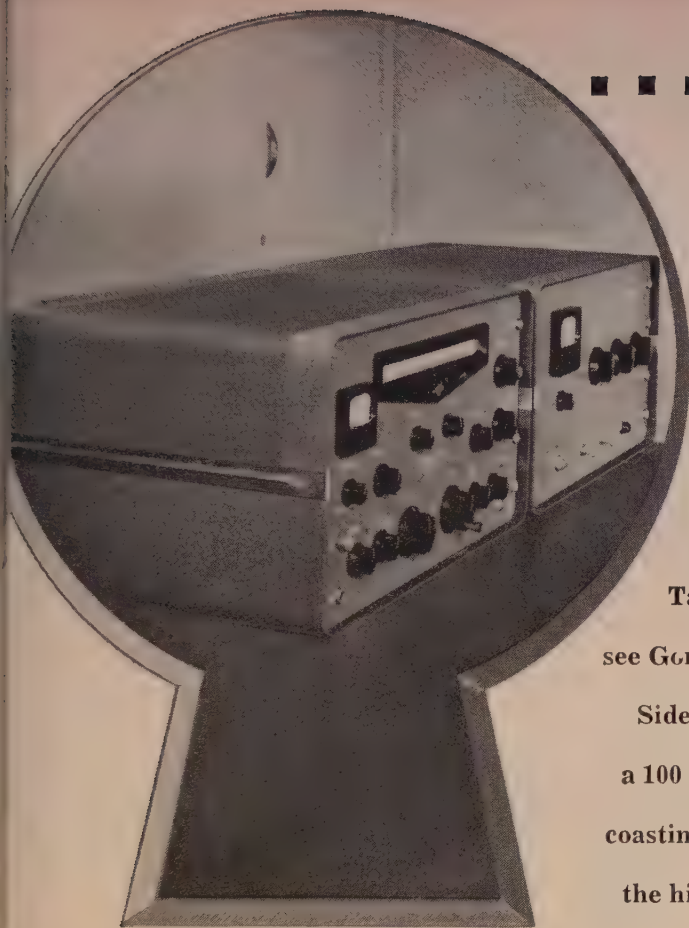

Take a thousand watt peek ...
see Gonset's GSB-100 and GSB-101.
Side-by-side, fully integrated ...
a 100 watt P.E.P. transmitter, just
coasting as a full-feature driver for
the high efficiency, grounded-grid
1000 watt P.E.P. linear. Observe all the

extra operating conveniences ... the clean
cut functional design. Consider the
truly outstanding SSB signal this
powerful combo can put on the air
for you. Check price tags and bring
real sideband dollar value into clear
focus. Here's your thousand watt peak!

GSB-100 SSB TRANSMITTER/EXCITER

SINGLE SIDEBAND TRANSMITTER/EXCITER,
BANDSWITCHES 80-40-20-15-10 METERS.
RATED 100 WATTS P.E.P. OPERATES ON SSB
WITH SELECTABLE SIDEBANDS. ALSO PM, AM
AND CW. EXCELLENT KEYING CHARACTERISTICS.
AS PI NETWORK OUTPUT. USES QUARTZ CRYSTAL
NOTCHING FILTER TO SUPPRESS CARRIER.
HAS STABLE, CALIBRATED VFO, EXCELLENT VOX
SYSTEM, HEAVY-DUTY AC POWER SUPPLY.



GSB-101 SSB RF LINEAR AMPLIFIER

1000 WATTS P.E.P. INPUT LINEAR USES
STABLE, EFFICIENT GROUNDED-GRID CIR-
CUITRY. 4-811'S. HAS PI NETWORK OUTPUT,
BANDSWITCHES 80-40-20-15-10
METER BANDS. SUPPLIES FOR POWER AND
BIAS AND ANTENNA RELAY ARE BUILT-IN.
LINEAR DRIVES BY GSB-100 OR OTHER
EQUIPMENT SUPPLYING 60-70 WATTS OF
DRIVING POWER.

GSB-100 SSB TRANSMITTER/EXCITER

499⁵⁰

GSB-101 SSB RF LINEAR AMPLIFIER

459⁵⁰

For further information, check number 10 on page 126.



GONSET

Division of Young Spring & Wire Corporation
801 SOUTH MAIN ST., BURBANK, CALIFORNIA

in "HAM" GEAR & TEST INSTRUMENTS

your BEST BUY is

EICO®

*U.S. Pat. No. D-184,776



Ideal for veteran
or novice. 90W CW,
65W ext. plate mod. 80 thru 10 meters.

* **90-WATT CW
TRANSMITTER**
#720
KIT \$79.95
WIRED \$119.95

"Top Quality"—
ELECTRONIC
KITS GUIDE



Delivers 50W undistorted audio. Modulates xmitters having
r.f. inputs up to 100W. Unique over-modulation indicator.

**HIGH-LEVEL
UNIVERSAL
MODULATOR-
DRIVER #730**
KIT \$49.95
WIRED \$79.95

Cover E-5 \$4.50



Continuous
coverage 400kc —
250mc; 500ua meter.

GRID DIP METER
#710
KIT \$29.95
WIRED \$49.95

Includes complete
set of coils for
full band coverage.

**COLOR & Monochrome DC to
5MC Lab & TV 5" Oscilloscope**
#460

KIT \$79.95 WIRED \$129.50

5" Push-Pull Oscilloscope #425
KIT \$44.95 WIRED \$79.95

PEAK-to-PEAK VTVM #232
KIT \$29.95 WIRED \$49.95


Vacuum Tube Voltmeter #221
KIT \$25.95 WIRED \$39.95

RF Signal Generator #324
(150kc-435mc)
KIT \$26.95 WIRED \$39.95

**TV-FM Sweep Generator
& Marker #368**
KIT \$69.95 WIRED \$119.95

**Dynamic Conductance Tube
& Transistor Tester #666**
KIT \$69.95 WIRED \$109.95

Tube Tester #625
KIT \$34.95 WIRED \$49.95



Send for
FREE
catalog
CQ-2

EICO® 33-00 Northern Blvd., L.I.C. 1, N.Y.
Show me how to save 50% on 65 models of
top-quality: ☐ Ham Gear ☐ Test Instruments
☐ Hi-Fi. Send free catalog & name
of neighborhood EICO dealer.

Name _____
Address _____
City _____ Zone _____ State _____

Add 5% in the West

For further information, check number 11 on page 126.

16 • CQ • February, 1960

MARS BULLETINS

First Army MARS Net Celebrates Anniversary

On January 6th, The First U.S. Army MARS SSB Technical Net celebrated its second anniversary. During two years of operation, the net has presented sixty-three talks and forums by electronic scientists and engineers from many parts of the country.

In order to expand the activities of the net in the Boston area, Colonel Clinton W. Janes, W4KS/1, of Acton, Mass., was appointed as associate net director for the section.

Wednesday evening at 9 PM EST on 4030 kc Upper Sideband.

Feb. 3—"Application Of Quartz Crystals In SSB Filters" by W. E. Benton, Division Chief, Manufacturing Engineering, Western Electric Company, Andover, Massachusetts.

Feb. 10—"Design Philosophy Of A Modern SSB Transceiver" by Chuck Carney, Manager Amateur Equipment Sales, Collins Radio Company, Cedar Rapids, Iowa.

Feb. 17—"Harmonic And Intermodulation Distortion In High Fidelity Amplifiers" by Milton Snitzer, Technical Editor, Electronics World, New York, New York.

Feb. 24—"High Power Transmitter Stations" by Herbert C. Hawkins, Project Engineer, Long Range Radio Branch, U.S. Army Signal Development Laboratory, Fort Monmouth, New Jersey

Feb. 1960 Schedule Air Force MARS Western Technical Net

Sundays, 2-4 PM PST
7832.5 kc, 3295 kc, 143.46 mc.

Feb. 7—"Mobile and Portable High Frequency Antennas" by Mr. Don Johnson, Jennings Radio Co., San Jose, Calif.

Feb. 14—"Modern Telemetry Techniques" by Mr. Robert Burr, Director Marketing, Arnoux Corp., West Los Angeles, Calif.

Feb. 21—"Technical Net Session, Conversion Discussion and Project Reports" by Net Members.

Feb. 28—"L3 Carrier System" by Mr. George T. Masters, W6GHE, Pacific Telephone and Telegraph Co., San Francisco, Calif.

Air Force MARS Eastern Technical Net

2-4 PM EST Sundays
3295 kc, 7540 kc, 15.715 kc

Feb. 7—"Principles of Infra-Red." Staff discussion. Rome Air Development Center.

Feb. 14—"UHF Radiotelephone Systems." John Longly, Engineer, New York Telephone Company.

Feb. 21—"Oscillator Circuit Considerations." Robert Gunderson, Editor, Braille Technical Press.


Feb. 28—"Quality Control Techniques." Alfred Stein, Engineer, Riverside Plastics Corp.

March 6—"The I R E National Convention." George Bailey, Chairman of the Convention.

5

YEARS FREE from

RUST...



CORROSION...

and WEATHER DAMAGE!




MOSLEY
gives you this
5-year guarantee
on these
**POWERMASTER
VHF BEAM
ANTENNAS**

All models are built of heavy
 $\frac{1}{2}$ " and $\frac{5}{8}$ " O.D. elements, designed for
many years of trouble-free "air time."

**MOSLEY
ELECTRONICS, Inc.**

8622 St. Charles Rock Road • St. Louis 14, Mo.

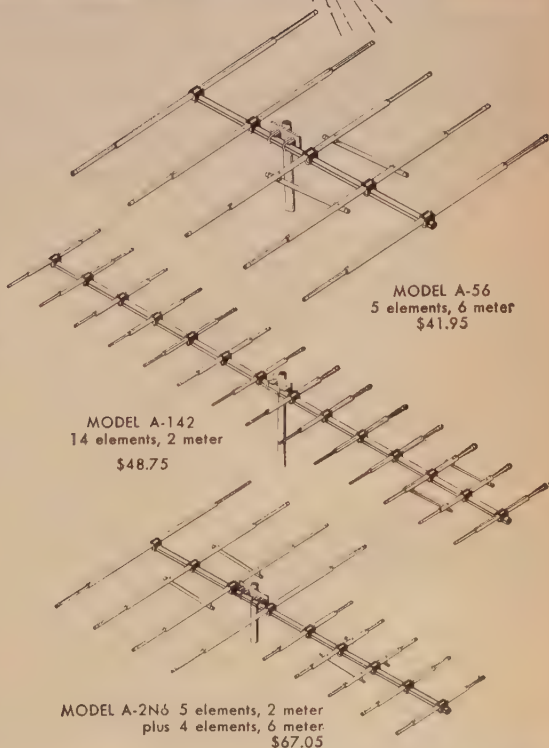

MODEL A-56
5 elements, 6 meter
\$41.95

MODEL A-142
14 elements, 2 meter
\$48.75

MODEL A-2N6 5 elements, 2 meter
plus 4 elements, 6 meter
\$67.05

NOW

SHURE

you can improve
speech intelligibility
and cut through QRM
with the

Ranger

MODEL NO. 505T

CONTROLLED
RELUCTANCE
MICROPHONE
WITH
TRANSISTOR
AMPLIFIER



All the advantages of controlled magnetic microphone construction—ability to withstand hard usage and extremes of climate and weather conditions—are yours in this sturdy, reliable microphone. The Ranger 505T has a flat frequency response characteristic (200 to 4000 cps), controlled to provide maximum speech efficiency.

It is ideally suited for SSB-AM transmission. Fits naturally and comfortably in the palm of the hand . . . takes up minimum space in mobile or fixed-station equipment. Equipped with heavy-duty push-to-talk switch.

LIST PRICE \$48.50

SHURE

The Mark of Quality

SHURE BROTHERS, INCORPORATED
222 HARTREY AVE., EVANSTON, ILL.

MICROPHONES, HIGH FIDELITY
AND ELECTRIC COMPONENTS

For further information, check number 13 on page 126.

18 • CQ • February, 1960

Letters to the Editor

Dear Wayne,

Since you printed my letter in the September '59 issue in which I submitted a list of calls of those people that are licensed pilots as well as hams, I have been receiving letters and QSL's from people all over the country requesting that I add their call to the next list.

Attached you will please find these additions which I hope you will be kind enough to print for the benefit of a concerned.

Should others find that either they or their friends fall into the category of the above and would like these calls added to the list, please have them send this information to my home QTH as listed above.

Many thanks 73

Jack M. Gutzeit, W2LZY

W1SBM	K3IBE	W6OJK	K4LKY
W2FDL	W3IXL	W6RMT	K4LMZ
K2JHM	K4ABZ	K8GBE	K4OJV
K2JVQ	W4BHR	K8LTS	K4QNG
K2MGQ	W4EEF	W9EMR	K4QYX
K2MMM	W4EHD	K9HFN	W4RRH
W2RCQ	W4HCZ	W9IZI	K4RUX
W3AMO	K4RHG	K9KVC	W4UDG
W3DJV	W4VIW	W9OQP	W4WSS
K3IBD	W6BZ	W9PMO	W4YIU
W9TRN	W9VXE	W9WNT	K4YYJ
W0IBZ	W4FHB	W4GQV	W4ZKE
			K8KSA

Charging

Dear Wayne:

The small mercury battery charger is a direct adaptation from the German (or Japanese) rechargeable flashlights which are available everywhere these days. The German made ones depend upon a Cadmium cell for current while the cheaper Japanese variety seem to contain some sort of sealed wet accumulator.


Basic circuit is shown below. The capacitor should be a plastic sealed tubular 1 MFD, 250 volts. The electrolytic variety have tendency to heat up. 1 MFD will charge a single small mercury cell in about 24 hours. If a higher charging rate is desired, as for a larger battery, more condenser capacity may be added in parallel.

The output voltage is "peak" voltage of about 150 v. and as the resistance of the battery being charged is essentially zero ohms, the limiting factor in charging is the number of milliamperes delivered as determined by the number of microfarads in the capacity used.

I have tried various types of rectifiers. The miniature selenium type works well. Of course it must be sufficiently rugged to pass the number of milliamperes which the circuit will deliver under the shorted conditions.

Why don't they tell us these things? Particularly people with Mohawk Tape Recorders?

Elliott R. Weyer, W2LLZ






Phone Patch Feedback

Dear Wayne,

I've been running a kw on SSB, 10 through 80, specializing in 15 & 75. I like to run phone patches, but have been

I 1960

is in the
last 28 years
&W will
continue to
supply
amateurs with
the world's
finest
equipment
and electronic
components

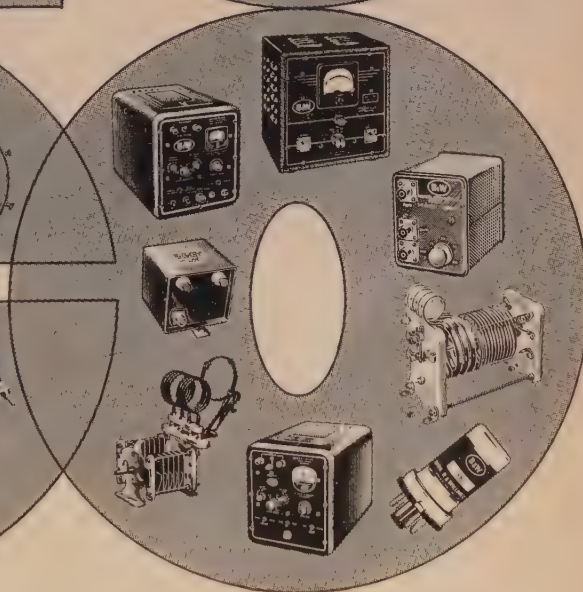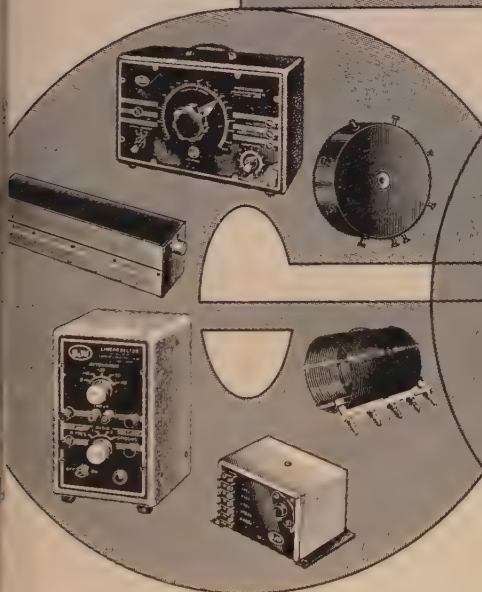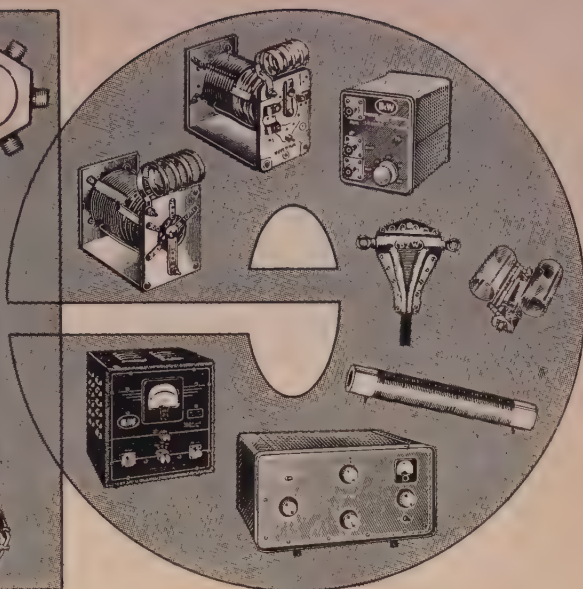

Transmitters-AM-CW-SSB
Single Sideband Generators
Single Sideband Receiving
Adapters
Dip Meters
Audio Oscillators
Distortion Meters

Linear Detectors
Audio Frequency Meters
Matchmasters
Toroidal Coils
Frequency Multipliers
Transistorized Power
Converters & Inverters

Low-Pass & Band Pass Filters
T-R Switches
R.F. Filament Chokes
Transmitting R.F. Plate Chokes
Audio Phase Shift Networks
Band Switching Pi-Networks

Cyclometer-type Counters
Antenna Co-axial Connectors
Baluns
Variable Capacitors
Fixed and Rotary Type Coils
B&W's famous pioneer line of
"Air Inductors"

Write for New Catalog



Barker & Williamson, Inc.

Bristol, Penna.


For further information, check number 14 on page 126.

NEW ...

CAMBION® Catalog

Lists Components

for "COMPLETE DESIGN"

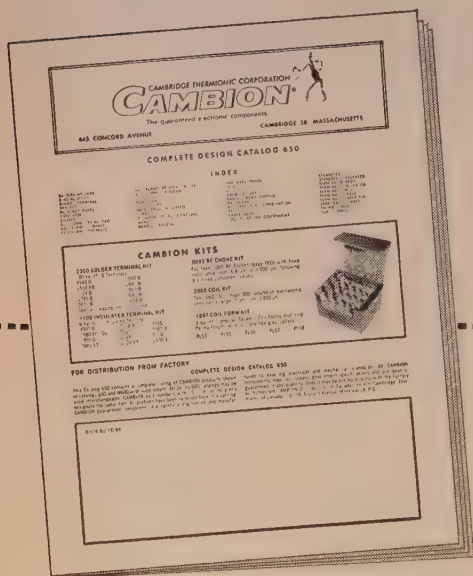

Here's the handy 16-page CAMBION Catalog that makes component selection for complete jobs faster and easier than ever before!

Includes everything from battery holders and binding posts to thumb screws and tube clamps. Covers in detail the wide variety of CAMBION standard and insulated terminals; coil forms and coils; jacks and plugs; panel hardware; and many, many other CAMBION Components. Also lists those versatile, low-cost CAMBION Kits: choke, coil, and coil form kits; standard and insulated terminal kits.

Whether you're working with conventional or printed circuits, building a permanent or temporary rig, you'll do a faster, more efficient job using this new reference. Yours without charge while they last. Today, write CAMBRIDGE THERMIONIC CORPORATION, 451 Concord Avenue, Cambridge 38, Massachusetts.



CAMBION®

The guaranteed electronic components

451 Concord Avenue Cambridge 38, Massachusetts

For further information, check number 15 on page 126.

20 • CQ • February, 1960

running into trouble with rf feedback. Not much, enough. And, as a side consequence, when I am transmuting others in the house hear me on the phone. So I took a life in my hands and called the phone company.

To make a most interesting story real short, you can at present run 100% successful phone patches with a trace of rf using the new modern type 500 telephone. To pick up rf and rectify it in the new type of equalizer circuit built into them. The other type, model 300, in use since WW II, does not do this. As a result, if you have any type phones you can expect difficulties.

They tried all sorts of filters, by-pass condensers, etc. We built the project into practically a national emergency with the result that there is now an official inquiry regarding the 500 phones for the research headquarters, Camden, N.J. to mull over and a possibility that they may be set up for these devices, which will, once and for all, legalize them beyond any question.

Irvin M. Hoff, K8DO
Ann Arbor, Michigan

Violations

Hi Wayne,

I read with much interest an article entitled "11.1 More FCC Violation," by W6EUV. However, I'm afraid I'll have to disagree with his statement that there is a correlation between the increase in licenses to the number of violations. Granted that according to statistics the analysis is insignificant, but he is excluding the fact that this is a time when the majority of new hams are a product of mass production type club sponsored license classes and commercial equipment!

Hank Clark, K8CSI/6 ex KZ5E

de K3JRK

Dear Sir:

Just a few lines to let you know of a recent change that the necessary records can be set accordingly. I would also appreciate a note in the publication of the change that my many "friends" ??? will know of the change. Perhaps have a laugh or two and think to themselves it couldn't happen to a nicer fellow.

I am no longer operating under the call of W7IAA/ have applied to the FCC for a second call with a w flowery complimentary letter in which I requested W3IAA, but apparently it reached the desk of someone with a sense of humor because they have assigned me the K3JRK.

I can just see a lot of the boys pronouncing the last three letters and having a smile or two. The body and the address remain the same, but the call has been matched to the body.

Sincerely,
Jack E. F.

Reciprocal Licensing

Dear Wayne:

The letter from Edwin K. Cole, K7IDF/KL7ABC, in the November issue, is the best letter to the editor I've ever read. Wish you could get him to contribute articles from time to time.

There was a blurb in the Novice department about "current ban on American ham," in Turkey. It gave as a reason, the lack of a reciprocal licensing agreement. It does not explain the ban as it actually applies, not just to Americans, but also to Turkish citizens as well. It also applies to MARS activities!

I know of one Turkish station, operating illegally with the call TA2AR. He runs 80 watts and works the two-meter 'phone band.

My interest in this matter stems from the fact that would like to operate from TA land, although I left my gear in storage when I came to Ankara. Also, I'm interested in helping the Turks, even if they eventually legalize ham radio for Turks but continue the ban on licensed foreigners. I am convinced that Turkey needs ham radio in her ambitious modernization program.

I have written to the ARRL to ask them to expedite the "chipping away" at the problem. I've written the FCC to investigate what will be required to authorize a reciprocal operating arrangement whereby I could operate here W4MXU/TA2.


[continued on page 122]

SIMPLY PLUG IN

**NO CIRCUIT CHANGES
OR INTERNAL CONNECTIONS**



The Globe Chief Deluxe is a top quality, self-contained transmitter for 90w CW use, band-switching 10-80M (75w meter indication for Novice use). Convert to phone by simple plug-in of UM-1 or SM-90. Provisions for antenna change-over relay. Choice of grid block keying or cathode keying with VFO. Built-in power supply. New wide range pi-net. Standard coax antenna fitting. Simplified 3-color diagrams for ease in kit construction. Wired, \$79.95. In kit form, \$59.95.




The UM-1 is a Class A or AB-2 modulator, driver for higher power modulator, or PA amplifier. Matches output impedances 500-20,000 ohms. Carbon or crystal mike may be used. Supplies up to 40w audio with proper output tubes. Provisions for addition of external meter for monitoring modulator cathode currents, for remote control of modulator. Wired, with tubes, \$49.95. In kit form, less tubes, \$34.95.

The Screen Modulator SM-90 is the perfect, low-cost method of converting CW to AM phone. It is perfect for coupling with the Globe Chief Deluxe, but contains instructions for adapting to use with similar CW Transmitters. Is self contained. Printed circuit board included for easy, simplified construction. Contains all parts and complete instructions. In kit form only, \$11.95.

TOMORROW'S PRODUCTS TODAY

The new Globe Champion 350 is a bandswitching 10-160M, powerful transmitter for 350w CW, 275w AM, 450w SSB (PEP). Use with external SB exciter and retain top AM performance. Extensively TVI-suppressed, filtered and bypassed. High level Class B modulation without clipping distortion. New cable drive VFO; smooth tuning and non-slip. Pi-Net 48-300 ohms, built-in VFO, push-to-talk, antenna change-over relay. New keying circuit virtually eliminates key clicks. Wired, \$495.00.

The Globe Patcher PH-1 is a hybrid phone patch for operating VOX on sideband, push-to-talk on AM. Mounts almost anywhere; easy to install and to operate. Balance control, Standby switch for landline call without energizing transmitter. Completely shielded. Wired form only, \$29.95.



**For information on
the complete line of
Globe Electronics
products see your nearest
distributor or write to**

GLOBE ELECTRONICS

A DIVISION OF
TEXTRON ELECTRONICS, INC.

22-30 SOUTH 34TH ST. COUNCIL BLUFFS, IA.

ASK ABOUT GLOBE'S NEW 2-WAY RADIO CITIZENS BROADCASTER

For further information, check number 16 on page 126.

The Turner '254'

THE MICROPHONE DESIGNED FOR THE HAM



Versatile, easy to operate—the new Turner 254 gives hams a dependable desk type crystal mike that's engined for all amateur communications. It operates by a touch-bar on-off switch and lever-lock on-off switch. Output level—48 db. Response level 60 — 8,000 cps. Smart grey hammertone finish. One-piece die cast construction gives years of rugged service. And it's priced for every ham budget — only \$14.10 net. See your Turner dealer right away, and get on the air with the new Turner 254.



17th Street N.E., Cedar Rapids, Iowa

For further information, check number 17 on page 126.


22 • CQ • February, 1960

Announcements

Rev. Fr. Ralph Conesa—VU2SX

It is with the deepest regret and sorrow that we announce the sudden death of Reverend Father Ralph CONESA, S.J. on November 20, 1959.

Born on February 14, 1908 at Saragossa, Spain, the late Rev. Fr. CONESA joined the Society of Jesus in 1924 and five years later was sent to India where he took his Ph.D. For some years he taught at the St. Xavier's High School, and in 1940 he went to the Dublin University where he took his M.A. in education. On his return to India, he was given the principalship of the St. Xavier's Technical Institute, which post he held till the time of his sudden demise.

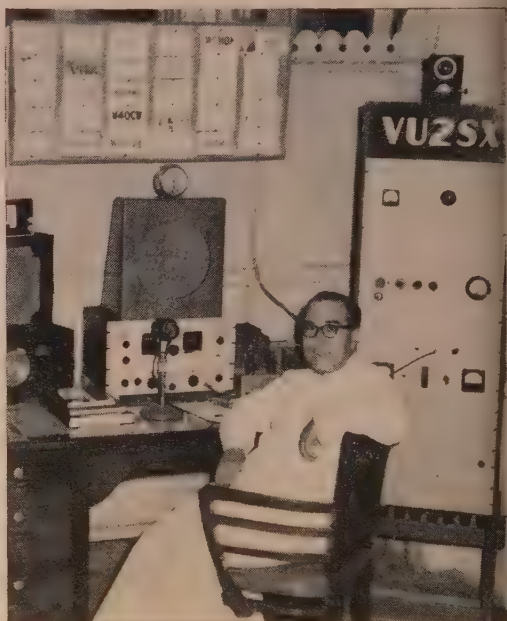

The late Rev. Fr. CONESA was also a very keen radio amateur and held the call-sign VU2SX. To thousands he was popularly known over the air as "CON". He had endeared himself to all who came in contact with him by his kind and amiable manners, and an affable and genial nature. He led an exemplary life—rich in fullness, activities and unselfishness. As the Secretary, since inception, of the Amateur Radio Society of India (Western Zone), he was its guiding spirit and did much to promote and popularize amateur radio in the Western zone.

In his passing away, amateur radio in India has suffered a severe loss. But though his voice is now silent over the air, his memory will always be cherished by those who had the good fortune to know him. May his soul rest in peace.

Ninth Annual SSB Dinner

The SSB Amateur Radio Association will sponsor the Ninth Annual SSB Dinner & Hamfest on Tuesday, March 22nd, at the Hotel Statler-Hilton, 33rd St. and 7th Avenue, N.Y.C. All amateurs and their friends are invited. This dinner, held during the week of the I.R.E. Convention, attracts many outstanding radio amateurs and communications men from all parts of the world.

Equipment displays open at 10 AM and the dinner starts at 7:30 PM. Bill Leonard, W2SKE, will be master of ceremonies. Tickets purchased in advance are \$8.50 each and \$9.50 at the door.

[continued on page 121]

THE BROADBAND TWINS



**THE REVOLUTIONARY NEW 100V
EXCITER-TRANSMITTER**

NO TUNING (except VFO), uses famous CE BROADBAND system. PRECISION LINEAR VFO—1KC Calibration. Single knob Bandswitch 80 thru 10. SSB—DSB—AM—PM—CW and SK. RF Output adjustable 10 to 100 Watts PEP. Meter reads Watts Input, Amps Output and Carrier Suppression. RF Scope. Speech Level and Load Mismatch Indicators. Audio Filter — Inverse Feedback — 50 db Carrier and Sideband Suppression.

GET YOUR DEALERS NOW.....PRICE \$795.00



**FAMOUS MODEL 600L
BROADBAND LINEAR**

NO TUNING CONTROLS — CE BROADBAND Couplers in HIGH EFFICIENCY CLASS AB² using single 813. Easily driven to 600 Watts PEP Input 160 thru 10 by a 20A or 100V. Built-In HEAVY DUTY POWER SUPPLY — 45 MFD PAPER Capacitor. Meter reads WATTS INPUT, GRID DRIVE, RF AMPS, and SWR. Completely shielded — TVI suppressed — parasitic free. REMEMBER there is LESS than ONE S UNIT difference between the 600L and a 2 KW PEP job.....PRICE \$495.00

MODEL 20A



**THESE MULTIPHASE EXCITERS
PIONEERED AMATEUR SSB**

MODEL 10B — 10 watts PEP. Plug-in coils 160 thru 10 meters. Perfect voice control on SSB—DSB—AM and PM — CW break-in; Carrier and calibrate level controls. 40 DB suppression.

Wired.....\$179.50 Kit.....\$139.50

MODEL 20A — 20 watts PEP. Bandswitched 160 thru 10 meters. SSB—DSB—AM—PM and CW. Magic eye monitors carrier null and peak modulation. Ideal for driving AB1, AB2, and most Class B linears.

Wired.....\$279.50 Kit.....\$219.50

MODEL 10B



MODEL GC-1. Gated Compression Amplifier. Connects between receiver and speaker. Automatically brings all received signals to same level—no blasting. Compensates for receiver AVC deficiencies. Compresses a 40 db increase in level to less than 3 db. Magic Eye continuously monitors compression value. Keep peace with your family and neighbors — buy a GC-1.

KIT....\$49.50 Wired....\$59.50

MODEL MM-2. 3" RF analyzer scope for use on SSB—DSB—AM—PM and CW. MONITORS RECEIVED AND TRANSMITTED SIGNALS thru new electronic switching circuits. NO TUNING — BROADBAND response 1MC to 55MC at power levels of 5 watts to 5 KW. SIMPLE CONNECTIONS. Built-in 1KC oscillator for exciter alignment. Plug-in IF adapters available for 450-500 KC, 80 KC and 50 KC.

IF adapter RM-455 or RM-80 or

RM-50\$9.95

MM-2 (less adapter) wired.\$129.50

Kit.....\$99.50



WRITE FOR INFORMATION ON THE COMPLETE MULTIPHASE LINE.

**MULTIPHASE
EQUIPMENT**

Central Electronics, Inc.

1247 W. Belmont Ave.

Chicago 13, Illinois


A SUBSIDIARY OF ZENITH RADIO CORP.

**MULTIPHASE
THE OVERWHELMING
CHOICE OF HAMS
EVERYWHERE**

For further information, check number 18 on page 126.

You Asked For It... Here It Is!

COSMOPHONE "1000"

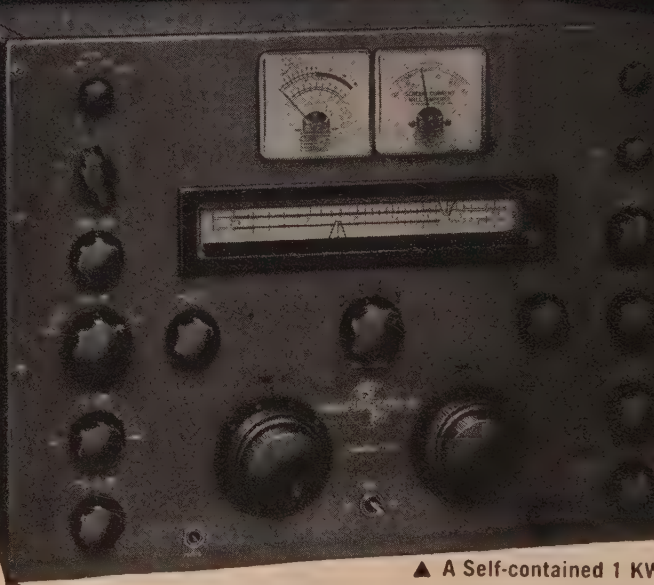

- ▲ A Self-contained 1 KW Transmitter-Receiver
- ▲ A True Table-top Station with NO Sacrifice of Performance

SPECIFICATIONS

TRANSMITTER

INPUT: Full 1 kw on Voice Peaks (Meters Read 2500 V at 400 ma) into a pair of 4 x 300 A's
UNWANTED SIDEBAND: 42 db down
DISTORTION (SSB): Third order products approx. 32 db down
FREQUENCY STABILITY: Drift less than 100 cycles.

CALIBRATION: Built-in 100 kc marker
AUDIO CHARACTERISTICS: 200-3100 cps

MIKE INPUT: High impedance
VOX: Built-in
LEVEL: Automatic level control
METERING: Screen, plate, and grid current, plus RF output
RF OUTPUT: 52 ohms
VFO's: Dual VFO's permit transmitting on the receive or any other frequency
CONTROLS: Vox, Qt, ALC, Grid Tuning, Plate Tuning, Antenna Loading, Audio Gain, Band Switch, Meter Switch

RECEIVER

SENSITIVITY: 1 microvolt for 6 db S/N
SELECTIVITY: 3.1 kc mechanical filter plus a T-notch filter
STABILITY: Drift less than 100 cycles from a cold start at room ambient
TUNING KNOBS: Coarse gear ratio of 20:1, fine gear ratio of 100:1 gives a 1 kc dial reading per division
CALIBRATION: Built-in 100 kc marker
IMAGE AND IF REJECTION: Better than 50 db
AUDIO DETECTOR: Balanced detector for SSB and CW, diode detector for AM
MODE SWITCH: Selects up or low SSB, or up low AM, or CW
DUAL RECEPTION: Two VFO's permit reception of any two frequencies on one band with the flick of a switch
BFO: Crystal controlled
METERING: S-meter
CONTROLS: T-notch filter, audio gain, RF gain, antenna trimming, tune selector, phone jack, tune A and B

"The COSMOPHONE 1000"—a complete Station, Receiver, and Transmitter. Dimensions: 17 inches wide, 12 inches high, and 15 inches deep. Power Supplies packaged separately, can be placed under operating desk. Price: "The COSMOPHONE 1000" with Power Supplies...\$1,550.00.

A Product of





For additional information and dealer nearest you, write Dept. QST-1

COSMOS INDUSTRIES, INC.

31-28 QUEENS BOULEVARD
 Long Island City, N. Y.

For further information, check number 19 on page 126.

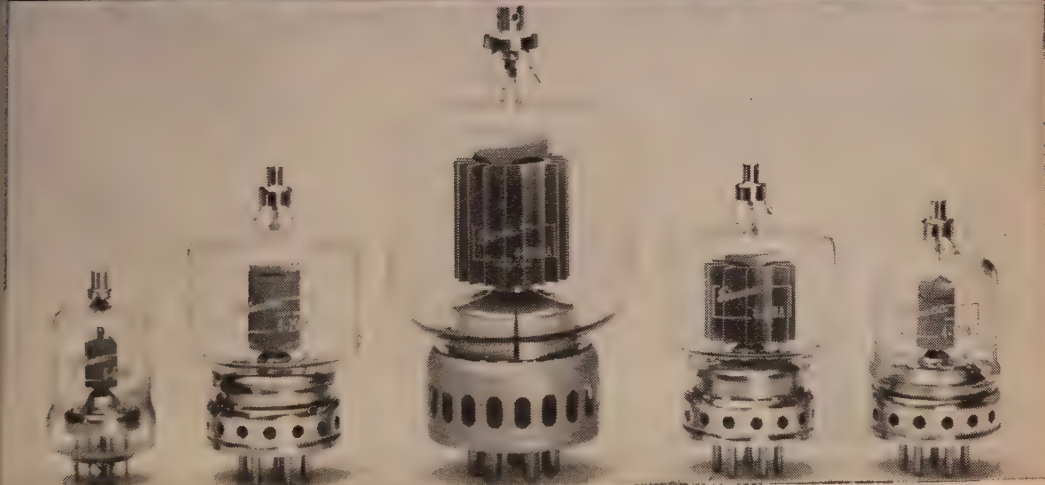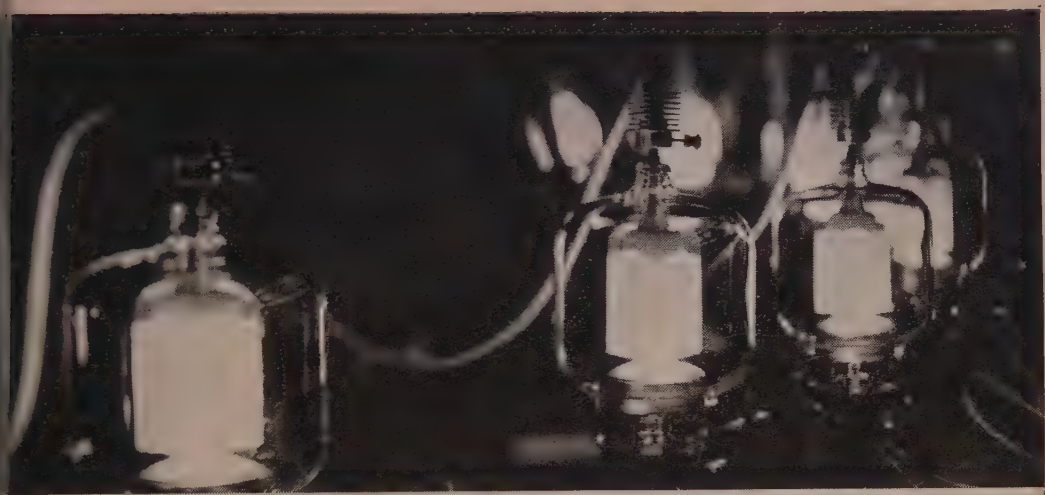

EIMAC PIONEERED INTERNAL-ANODE TETRODES PERFORMANCE LEADERS FOR OVER A DECADE

Developed and introduced to the industry in the mid 1940's, Eimac's line of internal-anode radial-beam tetrodes immediately received widespread and enthusiastic acceptance. Well over a million have been sold since that time. These tubes, quality leaders from the very start, still maintain that position through advanced processing techniques, inherently sound design and continuing concern with production refinements.

Clean electrode design, for example, and the exceptionally hard vacuums achieved on Eimac-developed rotary vacuum pumps, result in consistently reliable tubes with an exceptional ability to withstand high momentary overloads and peak powers. Rugged filament design with high reserve emission contributes greatly to their reliability and long life.

Stable operation at high frequencies is assured by low inter-electrode capacitances and low lead inductances. Driver requirements and associated

circuitry are simplified by the high power gain and low driving power requirements of these tube types.

These features, plus other Eimac design innovations such as the Pyrovac* plate and non-emitting grids make Eimac internal-anode tetrodes your logical choice for new equipment designs, as well as tube replacements, when exceptional performance and reliability are required. Most types available for immediate delivery.

**Registered Trademark*

EITEL-McCULLOUGH, INC.



San Carlos, California

For further information, check number 20 on page 126.

6

10

15

20

meters

With the *Exclusive* MINI-PRODUCTS' 4-BANDER

Featuring--

4 BANDS Small size ...
Light enough for any
TV Rotor

Model B-24 2 elements Amateur Net \$54.95*

Features

- Four Bands—6, 10, 15, 20
- Maximum element length 11'-6", boom 6'-10"
- Turning radius 7'
- Weight—11 lbs.
- Gain—comparable to any antenna of equivalent size
- SWR—Less than 2:1 on all bands
- 6061-T6 aluminum elements and boom
- 1" diameter elements for maximum band width
- Can be assembled in smallest garage

[Patent Pending]

• For the ham with limited space and those desiring maximum efficiency in the smallest size, Mini-Products takes pride in introducing the first truly Miniaturized multiband antenna, using the new Multiple-Hat principle† a new concept in Multiband antennas which provides coverage of any number of bands within a two octave range with a single antenna.

End loading employed on all bands—universally accepted by antenna designers as the most efficient method of miniaturizing and maintaining the high radiation resistance and radiator current necessary for effective radiation.

Model M-4 MOBILE

Amateur Net

\$16.95*

Features

- Four Bands—6, 10, 15, 20
- Overall height—5'-8"
- Up to 5 db. gain over base loaded antenna's of equivalent height
- SWR—Less than 2:1 on all bands
- 1" diameter Radiator for maximum band width
- 3/8"-24 base stud—Fits all standard mobile mounts

*NOTE—Pennsylvania residents add 4% Sales Tax

Mini-Products, Inc.

Ask for them at your favorite distributor or order direct from:
1001 WEST 18th ST., ERIE, PENNSYLVANIA

The Sun Never Sets on
International Products

Around the World
and Pole To Pole you will
find International
precision made crystals
and equipment where
dependability counts.




INTERNATIONAL
CRYSTAL MANUFACTURING CO., INC.

18 NORTH LEE, OKLAHOMA CITY, OKLA., U.S.A.

1960 CATALOG FREE / SEND FOR YOUR COPY TODAY.



CUSTOM MADE COMMERCIAL CRYSTALS
SPECIALIZED AND MINIATURE CRYSTALS
AMATEUR CRYSTALS
PRINTED CIRCUIT OSCILLATORS
CRYSTAL CONTROLLED ALIGNMENT
OSCILLATORS
6 AND 2 METER CONVERTERS
6 AND 2 METER TRANSMITTERS
MODULATORS
POWER SUPPLIES
CRYSTAL OVENS
MICROPHONES
ANTENNAS
CITIZEN BAND TRANSCEIVERS
SUB-ASSEMBLIES FOR RECEIVERS
CONVERTERS-TRANSMITTERS
CUSTOM OSCILLATORS AND
TRANSMITTERS

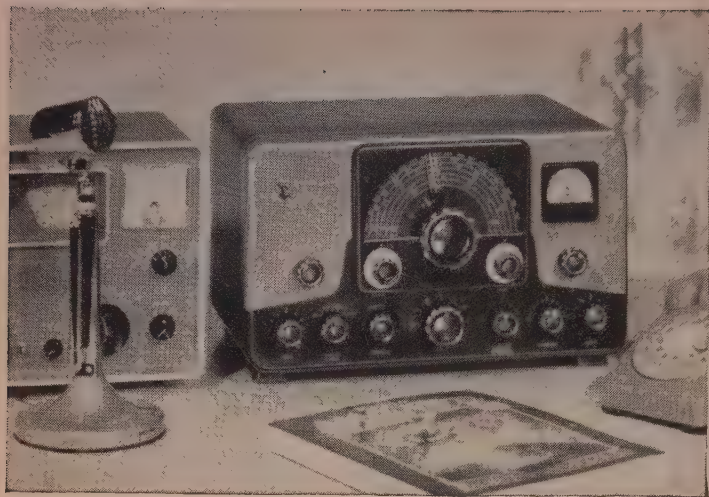

"RANGER" TRANSMITTER/EXCITER

This popular, superbly engineered transmitter also serves as an RF/audio exciter for high power equipment. 75 watts CW or 65 watts phone input. Built-in VFO or crystal control—instant bandswitching 160 through 10. 6146 final amplifier. Wide range pi-network coupling system will match antenna loads from 50 to 500 ohms—tunes out large amounts of reactance. Timed sequence keying. TVI suppressed. With tubes, less crystals.


Cat. No.	Amateur Net
240-161-1..Kit.....	\$229.50
240-161-2..Wired and tested...	\$329.50

No matter what you expect from a transmitter...

"VALIANT" TRANSMITTER

Here's effective power, wide flexibility, and many unique operating features combined in a compact desk-top transmitter! 275 watts input CW and SSB (P. E. P. with auxiliary SSB exciter) and 200 watts phone. Bandswitching 160 through 10. Built-in VFO or crystal control. Final amplifier utilizes three 6146 tubes in parallel—wide range pi-network output. With tubes, less crystals.

Cat. No.	Amateur Net
240-104-1..Kit.....	\$349.50
240-104-2..Wired and tested...	\$439.50

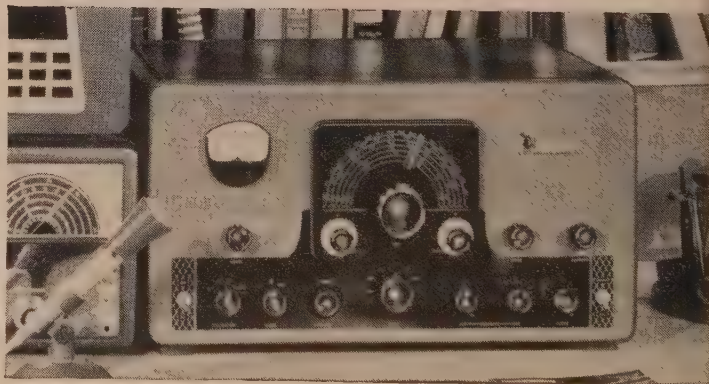

"FIVE HUNDRED" TRANSMITTER

More than one-half kilowatt of power plus outstanding operating convenience! 600 watts CW input ... 500 watts phone and SSB (P.E.P. with auxiliary SSB exciter)—instant bandswitching 80 through 10 meters! All exciter stages ganged to VFO tuning. High gain push-to-talk audio system. Built-in VFO or crystal control—VFO is temperature compensated, highly stable. Wide range pi-network output. Low level audio clipping—effectively TVI suppressed. With tubes, less crystals.

Cat. No.	Amateur Net
240-500-1..Kit.....	\$749.50
240-500-2..Wired.....	\$949.50

The world at your finger tips!



VIKING "KILOWATT" AMPLIFIER

This exciting unit is the only power amplifier available which will deliver full 2000 watts SSB* input, and 1000 watt CW and plate modulated AM! Class C final amplifier operation provides plate circuit efficiencies in excess of 70%. Continuous coverage 3.5 to 30 mcs. Excitation requirements: 30 watts RF and 10 watts audio for AM; 10 watts peak for SSB.

Cat. No. **Amateur Net**
240-1000-1...Wired and Tested...\$1595.00
251-101-1...Matching desk top, back and 3 drawer pedestal, FOB Corry, Pa...\$132.00

*The FCC permits a maximum of one kilowatt average power input for the amateur service. In SSB operation under normal conditions, this results in peak envelope power inputs of 2000 watts or more, depending upon individual voice characteristics.

you'll get more with a **VIKING!**




"THUNDERBOLT" AMPLIFIER

Here's real power and peak performance in a compact, completely self-contained desk top package. Rated at a solid 2000 watts P.E.P.* input SSB; 1000 watts CW; 800 watts AM linear! Continuous coverage 3.5 to 30 mcs. — instant band-switching. May be driven by the "Ranger," "Pacemaker" or other unit of comparable output. Two 4-400A tetrodes in parallel, bridge neutralized. Wide range pi-network output. With tubes.

Cat. No. **Amateur Net**
240-353-1...Kit.....\$524.50
240-353-2...Wired.....\$589.50

Johnson Keys and Practice Sets



The E. F. Johnson Company also manufactures a complete line of standard, semi-automatic, heavy duty, and high speed keys—as well as practice keys, practice sets, learner sets, and key accessories. See them at your nearest Johnson distributor.

**FIRST CHOICE AMONG
 THE NATION'S
 AMATEURS**



Viking

New Catalog

Your complete guide to amateur radio's most exciting equipment. Write today for your free copy, and you'll soon see why your best transmitter buy is a Viking!



E. F. JOHNSON COMPANY • WASECA, MINNESOTA

For further information, check number 23 on page 126.

A Viking II And A Heath SB-10 Together? Why Not?

Arthur DeBruycker, W2YGW K2LSF

378n Trimmer Road
Spencerport, N. Y.

This article is directed at those who might be interested in using a Viking II with a Heath SB-10 Single sideband generator as an inexpensive means of getting on the air with single sideband.

Recently the Heath Company marketed a single sideband generator kit for a nominal sum. It was designed for use with their DX-100 and Apache TX-1 transmitters. This is not to say that it will not work with other transmitters; it will just take more work to make them compatible.

There are a large number of Viking II transmitters now in use, and it is reasonable to assume that there would be a large percentage of them used on sideband if it became convenient to put them on sideband. Just this situation came up recently when K2ELK came to me and asked if I thought we could make them work together.

The following is a description of what we did in order to make the Viking II compatible with the Heath SB-10. It will be assumed at the start that you will also purchase the Heath MK-1 Conversion Kit,* because all the parts supplied will be used and the price is reasonable even if you happen to have most of the

*Designed for converting the DX-100 and DX-100B for use with the SB-10.

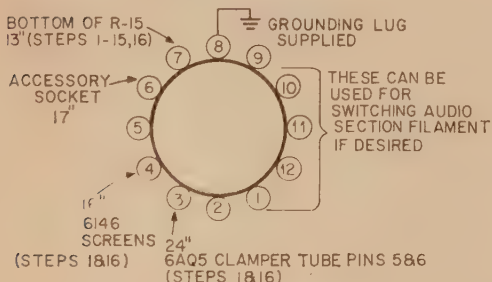


Fig. 1—Lead data for the SSB/AM switch supplied in the Heath MK-1 conversion kit.

components in your junk box. Besides, it is easier to work with new parts. (Parts list at end for those who want to roll their own.)

Because all of the information given in the MK-1 conversion manual is directed at Heath equipment, it is advisable that you do not spend too much time following it. A detailed set of instructions for the Viking II is outlined below.

Conversion

1—Drill a $\frac{3}{8}$ inch diameter hole symmetrically opposite the meter. This hole is for

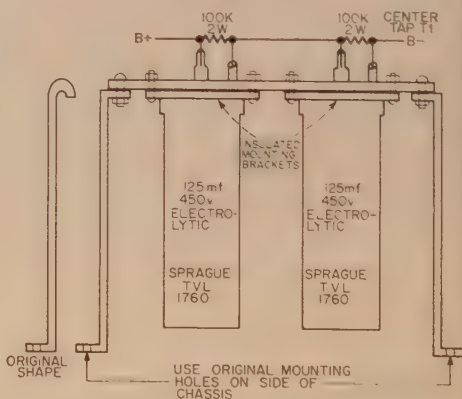


Fig. 2—Filter assembly that replaces C9. The condenser mounting plate is secured to the brackets that held down C9 after the bracket shape is modified.

mounting the switch supplied in the conversion kit. Wire the switch as follows before installing it: From pin 3 (refer to figure 4 in manual), a wire 2 feet long. From pin 4, a wire 16 inches long. From pin 6, a wire 17 inches long. From pin 7, a wire 13 inches long. Pin 8 is grounded to the grounding strap provided, after installation. Mount switch.

2—Mount the two coax connectors (831R/SO239) on the back panel in a convenient spot. (ours were placed above the chassis to

the left of the low voltage power transformer, but could be placed below the chassis if desired.

3—Remove C9 (10 mfd @ 1000 volts—high voltage filter), and make a bracket to hold the two 125 mf, 450 volt condensers that will replace it. Mount the condensers on their insulated washer and place 100,000 ohm 2 watt resistors in parallel with each. This is shown in fig. 2. Connect a wire from the center terminal of one to the B plus lead you removed from C9. Connect the ground side of this condenser to the center terminal of the remaining condenser. Connect the can side of this remaining condenser to the other lead

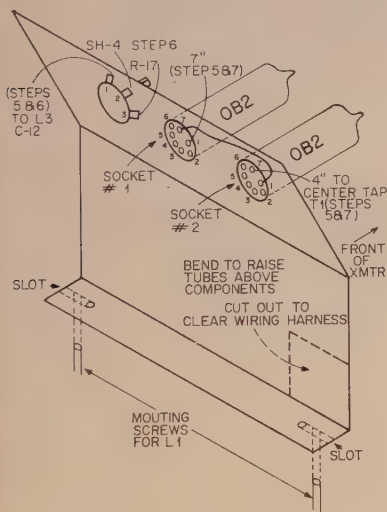


Fig. 3—Modifications for the VR tube mounting bracket. While fig. 3 of the Heath conversion manual shows the plate as being flat it must be bent as shown in order to clear the components in the Viking II.

center tap of T-1) you removed from C-9. Check polarity again to make sure it is correct. Make sure that neither condenser is grounded, or you will not get any plate current reading on the 6146's.

4—Remove C10, C11 (low voltage filter) replace with a dual 40 mf, 450 volt electrolytic tubular type.

5—Take the VR tube bracket and slot the mounting holes to the ends of the bracket as shown in fig. 3. A part will then have to be removed so that the bracket will fit in the place designated. After making sure that it can be mounted satisfactorily, mount the pot, and the tube sockets, using the hardware supplied. Connect a wire 6 inches long to pin 1 of the pot. Connect a piece of wire 8 inches long to pin 2 of the pot. Connect a wire 7 inches long from pin 1 socket 1. Connect a wire from pin 7—socket 1 to pin 1 socket 2. Connect a wire 4 inches long from pin 7 of socket 2.

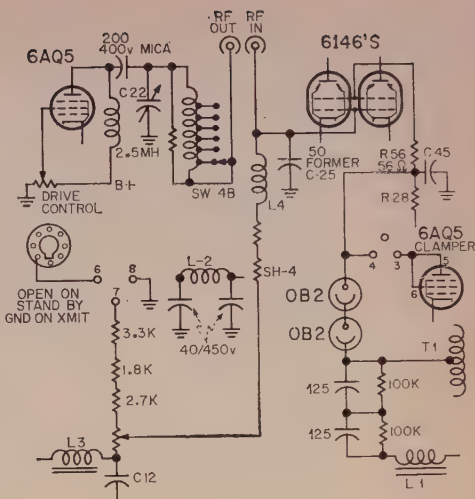


Fig. 4—Areas of the Viking II that were modified to accommodate the SB-10.

6—Mount the bracket just wired in the transmitter to the front two screws of L1, and connect it as follows: Remove the end of the wire from L3 (bias choke) which goes to R17. Connect it to pin 3 of the pot. Connect the wire from pin 1 of the pot to L3. Remove the wire from R17 to SH4. Connect the wire from pin 2 of the pot to SH4.


7—Remove the wire from the junction of R56, R28. Connect the lead from pin 1 socket 1 on the VR tube chassis to this point. Connect the lead from pin 7 socket 2 to the center tap of T1 (minus side of C9). Leave the tubes out of the VR tube chassis until you are ready to test the unit.

8—Remove the shaft from the crystal selector switch. Remove the wire from pin 5 of the 6AQ5 driver tube socket and install a 2.5 mh, 125 ma rfc between pin 5 of the 6AQ5 driver tube socket and 300 volt supply. Also at pin 5, 6AQ5 socket, connect a 200 mmf 600 volt mica condenser.

9—Remove C23 (driver tube plate tank bypass) and L20 from the circuit. Enlarge the hole these components passed through to at least 1/2 inch, being careful not to damage the band switch which is immediately above this hole. (We used a 9/16 drill in a chuck which we turned by hand).

10—Take a piece of RG62/U (part of conversion kit) and free about 3 inches from the shield. Solder the end just freed to the band switch at the same place from which you removed L20, working through the hole you enlarged in the chassis.

The other end of this piece of coax goes to one of the coax connectors you mounted on the back panel. We drilled two holes through the crystal socket board to allow the coax to pass to the upper part of the chassis. Use as little of the coax as possible, because you will need

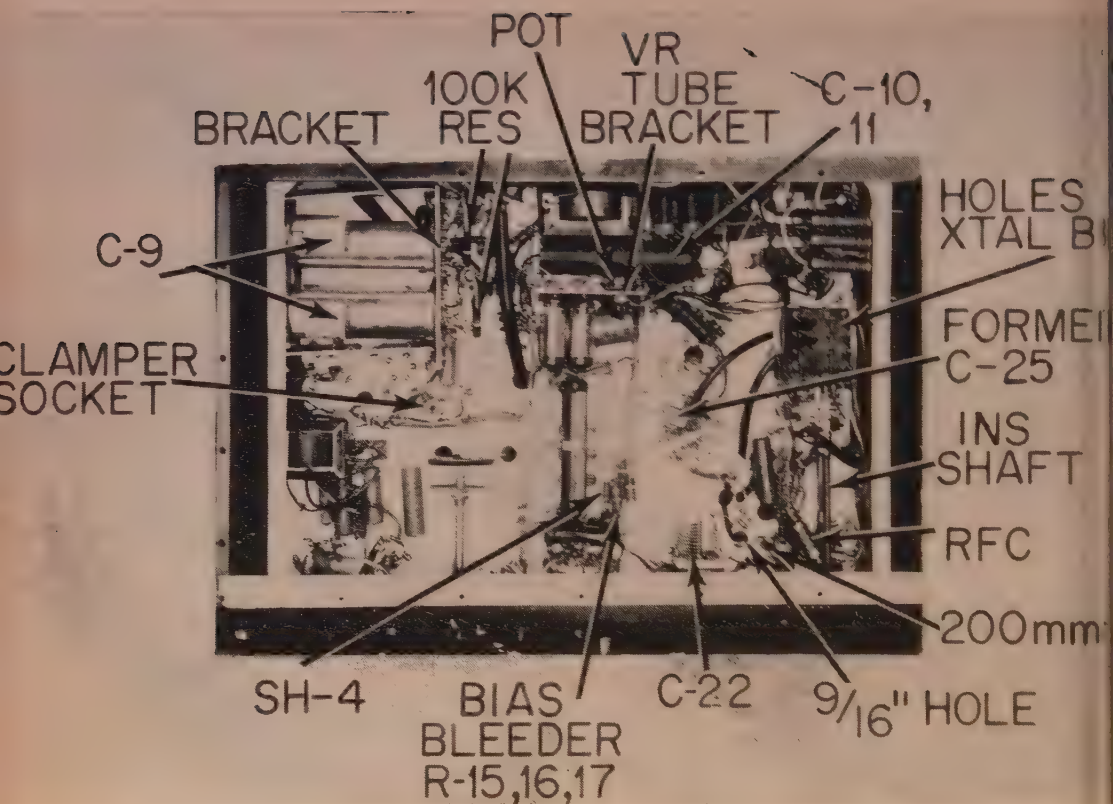

the rest of the piece for the other connection. Label this connector RF OUT.

11—Take the remaining piece of coax and connect it to the other coax connector, passing it through the other hole in the crystal board. Free an inch or so from the end and connect it to the bus bar that connects the 6146 grids. (pins 5).

12—Remove C25 (paralleled .000025 mfd) from C22 (driver plate tuning). Ground the end you have just removed, to the 6146 cathodes.

13—Connect the 200 mmf condenser from the 6AQ5 driver (step 8) to the point on C22 from which you removed C25.

14—Replace the shaft removed from the crystal selector switch with an insulated one, in order to reduce the shunt capacity of the driver tube plate choke to ground. This may not be necessary, but was an added precaution.

15—It was found that when the 3000 ohm pot was added in series with the bias bled, the voltages did not correspond to the original values. The bias bleeder values were changed as follows: R17 same value, but changed to 2 watts; R16 changed to 1800 ohm 2 watts; R15 changed to 3300 ohms 2 watts. The grounded end of R15 is removed from ground and mounted on an insulated tie point. (part of conversion kit)

16—Pass the leads you connected to the switch (which you wired and mounted in step

1) through the chassis where the rf drive control leads pass. Connect as follows: The wire from pin 3 goes to the plate (pin 5) of the clamper tube (6AQ5). Remove the other lead from pin 5 (6AQ5 clamper). The lead connected to pin 4 of the switch is connected to the junction of R56, R28 (screen supply 6146's). The wire connected to pin 6 of the switch goes to the accessory socket, on any unused pin. The wire connected to pin 7 of the switch goes to the insulated terminal where R15 is connected (step 15). Pin 8 is connected to the grounding strap supplied in the kit.

17—We deemed it desirable to make the keying jack open circuit. We provided for keying the oscillator through the connecting cable between the SB-10 and the accessory socket. This unit has grid block keying installed, so the accessory socket is a little more complicated. This poses no serious problem and the key is useful for zeroing purposes because it turns on the oscillator without turning on the 6146's.

18—Overheating of T2 could be a problem, therefore a filament transformer was added to take care of some of the extra drain, but I believe that the unused portion of the switch could be used to disconnect the filaments to the audio section of the Viking II. If you don't elect to open the filament circuit, removal of the tubes is recommended. This reduces the drain by 2.4 amps. The SB-10 requires 3.5 amps

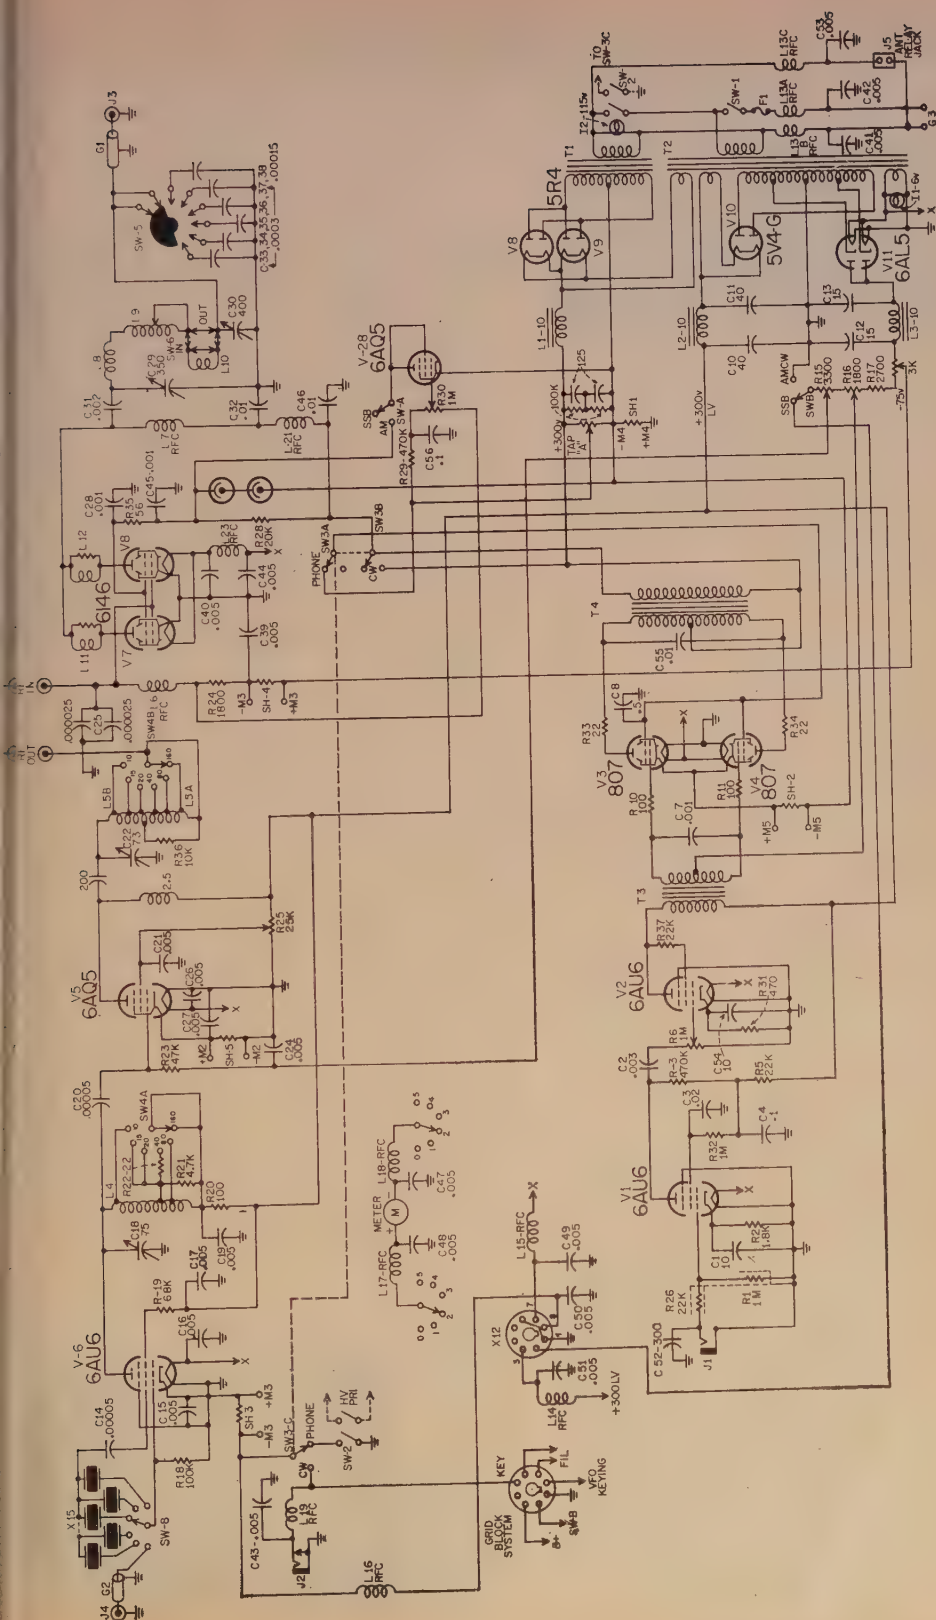


Fig. 5—Complete diagram of the Viking II after modification.



thus providing an additional drain of 1.1 amp, which should not damage anything.

Testing for Normal Operation

At this time it should be possible to test the unit for normal operation. Place a short jumper between the two coax fittings on the back panel. Use RG62/U preferably and the shorter you keep the jumper, the more drive you will have available.

Place the AM CW/SSB switch in the AM CW position and connect a dummy load to the output connector. Then check to be certain that it now works as it did previously. The changes you should notice are: The plate current will be higher in the driver stage for the same amount of grid current on the 6146's. Also the driver plate tuning will resonate in a different place than it did previously. It will also resonate in still a different place when the SB-10 is in the circuit. These conditions are normal. If you did not make any mistakes in wiring, the Viking II should now function normally.

Why?

The reasons behind some of these changes are as follows: The Heath SB-10 was designed for connection to a low impedance source of rf. As originally designed, the Viking II was connected for high impedance drive to the 6146's. Effectively what has been done is to change from capacity (high impedance) to a pi-network (low impedance) coupling between the driver and the 6146's. If this change is not made, the shunt capacity of the coax, which is connected across C22, in series with C25 would be on some bands, more than the total capacity in use in C22. This would prevent it from reaching resonance. Also, on the bands where resonance could be attained, the grids would be tapped down on a voltage divider consisting of C25 in series with the shunt capacity of the coax. This would reduce the drive voltage available, to a low value even though the voltage being developed would be sufficient for the purpose of driving the 6146's.

The larger filter condenser (C9) was installed for the purpose of improving the dynamic regulation and not for reduction of hum. (Although they help reduce hum too.) It was interesting to note the improvement in

waveform as noted on a scope when the transmitter was keyed, after replacing C9. Condensers C10, C11 were not large enough to provide the necessary amount of filtering when the SB-10 load was placed on this supply. The larger ones helped noticeably here.

Testing in the SSB Position

Now if you have the SB-10 wired, you should be ready to test it. The following procedure is in order: Set the AM CW/SSB switch in the SSB position, install the VR tube and temporarily install a jumper from the bottom of R15 to ground. Also, connect a dummy load to the transmitter output. Set the transmitter on end and turn on the filament power. After about 1 minute, turn on the plate voltage and adjust the pot on the VR tube chassis for a plate current reading of 55 ma on the 6146's with no drive applied. If it is not possible to achieve this setting, check your work again—you goofed somewhere! *Be careful* because there is about 600 volts dc available under the chassis and about 1500 volts ac, which will do more to help your beneficiary collect your life insurance than most other things you could mention. Naturally, this will do you no good.

Testing with the SB-10

If you have passed all these tests, you are now ready to test the Viking II and the SB-10 together. It will be necessary to provide power to the SB-10 and the vfo if you use one. In our case we made up an adaptor which plugs into the accessory socket and has two sockets in parallel. The VFO is plugged into one, and the SB-10 is plugged into the other.

With vfo and SB-10 plugged in, be sure that B plus is available in the SB-10 and that the filaments light. It will also be a good idea at this time to see that the blocking bias is being controlled by the relay, as is also the keying circuit. We ran an extra wire by wrapping it around the cable, and connecting it to an unused pin in the power plug on the back of the SB-10. We then ran a lead from that pin to the key terminal on the back of the SB-10.

The tuning and test procedure given in the conversion manual, as well as the SB-10 manual cover how to tune up the unit from here

[Continued on page 124]



Ham Shackles

Pauline Karrol

It took me a while after I got married to grasp the fact that I had a ham for a husband. Not the Virginia variety which has been smoked to a turn, but a real live one. Of course I knew my beloved was interested in amateur radio. The subject had been mentioned during our courting days, but my ideas about it were rather hazy at the time for I had other things on my mind. Actually, I thought of amateur radio as just another hobby, like stamp collecting, playing golf or hi-fi. This illusion was soon shattered. From just a hobby it may turn into a vocation and can even reach a stage of obsession, then addiction and finally affliction.

I discovered that ham radio is not confined to a certain time or season. Like the guardians of the U.S. mail, neither rain nor sleet nor fog, or the fact that you're expecting a household of guests will keep these characters from their assigned microphones and telegraph keys. The message must get through!

What if Junior *did* fall down the front steps and crack open his skull? Before the OM does anything about it, (Jim) K Zero something or other in Ottumwa, Iowa must get a signal report. The boy's head will be taken care of in due time, but meanwhile Jim will be so pleased to hear that he's coming in 5 and 9 plus 10 dee bees with that little old set he made all by himself out of the parts from Aunt Bertha's hearing aid and his grandmother's corset wire.

Seldom will the whole family eat a hot meal. The moment you put the potatoes on the table, the head of the household will make a perfect contact with Fred from Florida. After the exchange of QTHs, QRMs, QTC and so on, comes a complete weather report on each side and a full account of the afternoon traffic jams or some other trivia. Finally, when the band is fading and your nerves are frayed, in he walks, all smiles. To a ham, time is so relative!

Then the average table conversation goes something like this:

"Guess I'll have to put up another antenna," he says as I offer him some stew. "Yep, guess my standing wave ratio's too high."

"Did you pay the electric bill?" I try to change the conversation.

"How about holding the field strength meter for me after we eat, while I check my front to back ratio on my beam?" he asks, completely ignoring my question. (Front to back ratio indeed! His "front to back ratio" in-

creases day by day for lack of proper exercise!)

Suddenly he gets a strange gleam in his eyes, drops his fork, and with a mumbled "excuse me", rushes from the table.

"What's the matter now?" I ask a bit irritated. "Aren't you going to finish your supper?"

"I just remember, I've got a schedule with Ken over in the Islands. I'll finish later."

"Later" is anywhere between 10 PM and 2 AM.

When I realized I couldn't fight the "ham gang", I tried to join them. But alas! This is easier said than done. There is no honorary or auxiliary or associate membership. Either you're in or you're not. I'm still out. It isn't because I didn't try. I braved my way through the handbook and license manual, but my poor brain retained very little. I guess I'm one of the unfortunate dopes who can't comprehend the difference between a radio tube and a tube of toothpaste.

The Morse code was another hopeless struggle. All I remember is dit dit dit dit space dit dit, which I think means hi. Oh, I can also blast out an SOS on the car horn in case of necessity on a lonely road at night. The rest of the code remains as much of a mystery to me as the language of the Amazon headhunters. And it doesn't help a bit if the OM pointedly tells me about a thirteen year old girl who just got a General license.

After I discovered that a mere demonstration of desire and good will do not count with the FCC when it comes to granting a ham license, I resigned myself to the fact that I shall have to remain only an XYL, though the name still irritates me a bit.


But we XYLs must not despair. We must look at the big advantages. What other women's husbands have such fascinating, educating, aggravating (I mean interesting, but it doesn't rhyme) hobbies? Think how nice it is to hear Rodney in VK-land tell your husband about the lovely weather they're having down yonder in Melbourne, Australia—just right for a swim. Doesn't that lift your spirit when you're wondering how you'll make it to the market through all that ice and snow? And while you're scraping the egg yolks from the breakfast plates, does it not give you satisfaction to find out that Frau Meier in Oberweisach, Germany is just finishing her supper dishes? Of course it does!

[Continued on page 123]

Complete IF Amplifier For Converter To Receiver Service

POB 623

Hagerstown, Maryland

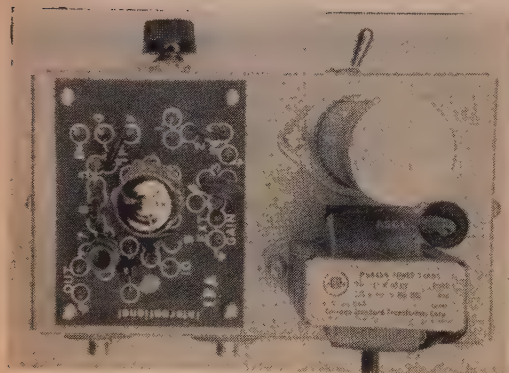

Many receivers in use by Amateurs today lack sensitivity when used with a crystal converter for the *vhf* bands. The Novice operates on 144 *mc*, the Technician on 50 *mc*, and both often start their Amateur activity with inexpensive or older model receivers.

The old adage, "you gotta hear 'em before you can work 'em," is as true as ever. The *if* amplifier described here will help you attain this needed sensitivity when using a crystal controlled converter for the *vhf* bands with your receiver. Yes, even if you are using an *ac/dc* type receiver of the low cost variety!

The range of the *if* amplifier should be chosen for the output frequency of your converter. For example, if you are using an output frequency of 7 to 11 *mc*, then you would build the amplifier for 7 to 11 *mc*. The unit shown in the photo, was used with a converter output frequency of 600 to 3600 *kc*. Any frequency between 600 *kc* and 30 *mc* may be used however. Simply state the frequency desired when ordering the printed circuit board.

The printed circuit is used for the basis of the unit and it comes complete with all parts which mount on the board. The unit is mounted on an *LMB* box type chassis, $5\frac{1}{2} \times 3 \times 1\frac{1}{4}$ inches and contains its own *ac* operated power supply. The *ac* power supply provides the unit with two important features. First, no power is required from the receiver. Secondly, the supply will permit the unit to be used with an *ac/dc* type receiver.

The supply uses the relatively new Silicon diodes for rectification, in a voltage doubler circuit. They are used because of their small size and reliability. A gain control is provided to prevent overloading of the receiver when

receiving very strong signals. The unit is not at all critical and no trouble should be encountered by the builder, even if inexperienced. The two jacks on the rear panel of the chassis are furnished with the printed circuit board

Construction

The first step in the construction of your amplifier is to make the cut-out for the printed circuit board. Using a ruler, draw the cut-out size necessary on the chassis, making it approximately $\frac{1}{4}$ inch smaller than the actual printed circuit board. Drill holes around your markings (inside the layout) and then file the sides smooth. You may then drill the holes for mounting the transformer and filter capacitors. Finish the drilling with holes for the toggle switch, gain control, jacks and line cord.

Wiring

When the drilling is finished, mount and solder the parts on the printed circuit board. Use a small soldering iron for this. A 25 or 50 watt iron is fine. Then mount the parts on the chassis, mounting the printed circuit board last. Proceed to wire the various parts under the chassis.

Notice that there are various points marked
[Continued on page 115]

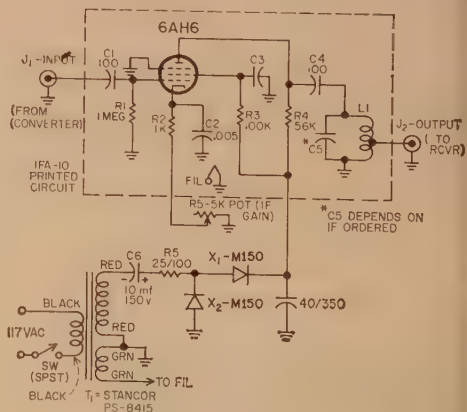


Fig. 1—A complete if amplifier for insertion between the converter and receiver. All parts shown within the dotted lines are part of a printed circuit kit marketed by International Crystal Co., 18 N. Lee, Oklahoma City, Okla. Desired operating frequency must be specified since it determines the value of L1 and C5.

Drift Transistor Exposed

Don Stoner, W6TNS

The word DRIFT is a well-known term in physics used to describe the motion of charged particles in ionized gasses under the influence of an impressed electric field. Charged particles move much faster in a given direction by "drifting" in an electric field than they can by random diffusion in the absence of an electric field. In keeping with the analogy between the drift phenomena in gaseous discharges and in semiconductors, the word "drift" is applied to transistors which incorporate a "built-in" accelerating field.

The electric field in drift transistors, which generally propels the charge carriers from emitter to the collector, is achieved by the graded distribution of an impurity in the germanium base region (see fig. 1). This built-in accelerating field, a feature not available in conventional transistor designs, results in greatly decreased transit time and therefore a much higher upper frequency limit.

The successful use of the drift field principle lies in the critically accurate control of impurity distribution in the base region during manufacture. The density of the impurity distribution in the base decreases exponentially from very high values at the emitter to low values at the collector. The impurity distribution introduces a constant electric drift field which accelerates (propels) the charge carriers through the base region. Compared with the performance of conventional transistors,

in which the charge carriers move by means of diffusion—a comparatively slow process because of its random nature—the acceleration of charge carriers by the drift field represents a major improvement. Because of the accelerating field in drift transistors, the transit time of the charge carriers is substantially less than the transit time of the carriers in a conventional transistor. This results in greatly increased high performance.

The high impurity density in the base near the emitter results in a *low base resistance*, while the low impurity density near the collector contributes to *low collector capacity* and results in a high collector breakdown voltage. The extremely low value collector capacitance makes neutralization unnecessary in most applications and permits the design of simple and economical circuits.

The combination of low base resistance, high collector breakdown voltage, low collector capacity, and short transit time, makes possible the design of high-power gain, high frequency circuits with excellent operating stability and good automatic gain control capabilities over a wide range of input signals.

The RCA drift transistors listed, have four flexible leads and are hermetically sealed in metal cases. The fourth lead is connected to the case internally to minimize interlead capacity and reduce coupling to adjacent circuit components.

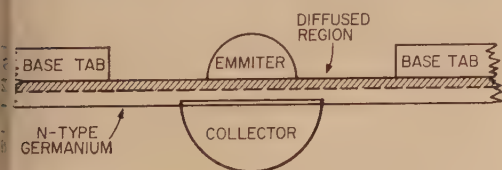



Fig. 1—Cross sectional view of the drift transistor structure.

Germanium pnp alloy junction drift transistors

Type	Service	Fo-Max	Net price
2N247	rf amplifier	132mc	\$3.22
2N274	rf amplifier	132 mc	3.22
2N370	rf amplifier	132 mc	3.22
2N371	rf oscillator	132 mc	3.22
2N372	rf mixer	132 mc	3.22
2N373	if amplifier	132 mc	2.25
2N374	converter	132 mc	2.33
2N384	vhf amplifier	250 mc	6.44
2N544	rf amplifier	132 mc	2.42
2N640	auto rf amp.	132 mc	*
2N641	auto if amp.	132 mc	*
2N642	auto converter	132 mc	*
2N643	switch—20 mc	—	*
2N644	switch—40 mc	—	*
2N645	switch—60 mc	—	*

Construction of a typical drift transistor. This unit is designed for use in broadcast radios as an if amplifier

*not listed in Allied catalog

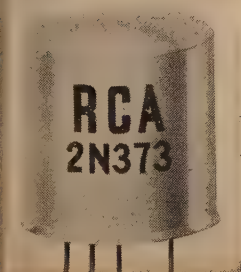

Twenty-three Millions a Year - - -

Roy L. Gale, W1BD

187 Niantic River Road
Waterford, Conn.

That's just what the man said! And he couldn't be giving away any secrets on the earnings of a QSL-printer, either, for any ham who has laid down three inflation dollars for seventy-five cents worth of material and three hours of labor, knows that figure would be a gross understatement. No, it must be something else.

Twenty-three million pieces of first-class mail go to the Dead Letter Office annually. That we know. But we don't know how many of these are QSL cards that were not addressed properly.

Our Novice friend spent weary months in studying for the precious ticket. Perhaps his call letters weren't simple and pretty—like, for instance, W1BD—but to him they looked mighty good. Can we blame him for thinking that everybody else must have heard about it? And, of course, his postmaster had been duly notified of the matter. So he thought!

For no good reason at all, this situation brings to mind an incident that took place 47 years ago, when I was station agent at a little place in Vermont. The railroad is now defunct, but the story isn't:

One Monday morning a young farm lad breezed up to the ticket window and said in a man-about-town way: "Well, I guess I'll have to have a ticket."

Time may have distorted my memory of events a little, but I believe that my face was fairly straight when I answered him: "Where to?"

"Why, Marshfield, of course!" he said, without even trying to conceal his disgust at my ignorance. After all, shouldn't everybody in town know about this eleven-mile trip that he had planned weeks before? Stupid me! I soon gave up the job and went back to school.

Four decades later, our ham radio operators—old enough to know better—were acting

in much the same way. A ham would spend as much as five cents for a QSL card, affix a 3-cent stamp to it, and blissfully drop the thing into a postbox. And then he waited, waited, waited for the reply that didn't come. Why? Was our Pony Express slipping? Not at all. But, you see, the card was addressed in the manner: "ARS KNØ—, Opr. Bob, Kansas City, Mo." My 1929 atlas informs me that Kansas City had a population of 325,000 even at that early date.

Three years ago, I had a brilliant idea. I would get on a Novice band and show those beginners how to do things right. Surely, they would listen to me, an OT with 34 years of ham experience! Then came the disillusionment.

Many Novices shied away from answering my two-letter call. Perhaps they thought that I was a bootlegger. After much fruitless calling, I corralled one of them, most likely because he misread my call as W1BDW.

With slow, machine-like sending I gave him the following, intended as an example for him to follow: "gm, OM, this is Roy Gale in Waterford, Conn.," followed by his report, a sent single and ending with: "And who are you?"

The reply staggered me. "gm, Roy. Who is Gale?" and to show me the modern, progressive way of doing it, he continued: "name name name is is is Paul Paul Paul QTH QTH QTH Pawtucket Pawtucket Pawtucket R. R.I. R.I. Ur sigs 579 579 579 vy fb wl bent 73s pse QSL, etc." He was gone.

So this was the new way! What is this thing "nostalgia" that makes some of us yearn for the good old days?"

It would appear that I had committed some grave social error in giving my full name, an error which became more apparent when he sent me a QSL addressed to: "ARS W1BDW c/o Chief Op Roy, Waterford, Conn." For

Several minutes I pondered the meaning of "ARS." Our postmaster must be better informed, for he delivered the card to me, possibly because he knows the identity of only two hams in town, both oldtimers. All QSL's addressed as above to any of the dozens of hams in this town find their way into the postbox of one or the other of us. We constitute the dead-letter offices.

Another ham gave his first name three times, even though I had just given him an R5S9 report. When I said: "OK, but what is your last name?" he came back with: "Name is Frannie Frannie Frannie." I was almost convinced that his name was Frannie; also that he had a very poor opinion of my copying ability. I tried again. This time he ran the count up to five before I kicked my rectifier tube under the table and took a bite out of my 3730 kc crystal. I was fully convinced that he wasn't cut out to be a missionary. I hadn't been devoured by cannibals, which was something. Too old and tough, maybe. Or possibly the flavor was "off."

One card that came to me was marked: "KN1G—, Chief Opt Cub, etc." To date I haven't located Cub, but as the Gale shack is situated at the edge of a dense virgin forest, I am optimistic about the matter. One evening I heard one of Cub's AM harmonics wobbling my FM Receiver, but before I could get a good beam on him with my fixed-position antenna, he was gone. Some day he mayamble out of the woods into my garden, and then I'll know whether he is a small bear or a little fox.

Another elusive type of ham is the one who fabricates a nickname from his last name. For instance, a QSL recently put into the Gale dead-letter box was addressed as follows: "ARS K1H—, Opr. Pete, Waterford, Conn." Now, I wanted that card to use as an illustration in this story, but unfortunately, my XYL, W1AWP, guessed the identity of Pete. "Oh," she said, "I'll bet that is Sam Peterson on Silver Spur Road." Sure enough, it was he, and I lost my illustration. OW's should be more co-operative, you know.

Though I spend little time hamming, I get much enjoyment out of listening to other hams. One afternoon, I tuned my receiver to the 75-meter phone band to listen to a group that congregated there twice each day. This day, one XYL operator was in a very distressed mood. A QSL had been returned to her, marked "Addressee Unknown," although postmasters seldom take the trouble to do this. "Why," she was saying, "was it returned? What did I do that was wrong?"

My fellow D. L. O. ham friend replied: "How did you address it?"

"Why, to Operator Bill, Buffalo, New York." Although I am really psychic at times, I didn't have to call this occult power into play to show me that my friend was smiling broad-

ly when he came back with: "Oh, I guess Bill probably hasn't lived there long enough for the postmaster to know that he is a ham." We have to be polite to the gals; bless 'em!

One card in my collection was addressed merely to "43 Rope Ferry Road" here in town. No good! Many beginners are neither skillful in sending nor in receiving numerals. Even if the name "Bob" had appeared in the address, it would have availed nothing. This road is two miles long, and "43" proved to be a hog pasture, with never a two-legged ham in sight.

If the poet, George Herbert, had lived three centuries later, he most likely wouldn't be thinking about a battle being lost because a horse threw a shoe, but would write something like this:

"For want of a surname
a QSL was lost.
For want of a QSL
a contest was lost."

Very early in life, I took means to prevent ever being called by a nickname. When I was born, my parents placed several names before me, most of them beginning with "R," although the only one I can now recall is "Rupert." Imagine a shy chap like me being addressed as "Chief YL-Chaser Rupiel!" I squelched the racket by naming myself "Roy." So help me, that statement is 95 per cent true. Honesty compels me to add that it required six years for me to make up my mind. The editor of a well-known ham magazine—the name of which escapes me at the moment—once called me "Fire Blower." Could be; I dunno. I won't argue; I'm peaceable.

"Wipe that smile off your face and say 'sir' when you address me!" snapped Major Spit-and-polish at the trembling recruit. But when he resumed his QSO with a total stranger, he said: "Name is Mortimer, but everybody here calls me Mort." Just like that! A regular Dr. Jekyll and Mr. Hyde.

Unlike dogs, cats, and other animals, a person is given two or more names with which to establish his identity. Then he becomes a ham and henceforth uses only a nickname. The insertion of one's call letters in an address serves no purpose whatsoever, since it is meaningless to anybody except the addressee. It may boost his ego slightly.

"Twenty-three million pieces of mail annually —" said the radio commentator. Because hams are among the worst offenders, let us assume that one million pieces are QSL's. At a low average expenditure of five cents for a card and postage, this amounts to a mere \$50,000. In these days of whirlwind inflation, this is hardly worth mentioning. No, we wouldn't even stoop to pick it up. But it does help the QSL printers a wee bit.

The last resting place of Cub,
a ham who had no surname.
He died while waiting for
a QSL that never came.

A Coax Wavemeter for 300 to 2000 MC

W. Massey, W4ECL

Route 4, Box 96-D
Pensacola, Fla.

One of the most troublesome problems in amateur *uhf* and microwave work is that of measuring frequency. The coax wavemeter described here allows one to measure frequencies in a part of this range with reasonable accuracy. The accuracy is more than sufficient for many uses since, when working with crystal controlled oscillators and frequency multipliers, it is only necessary to establish the frequency close enough to tell which harmonic one is on.

The accuracy of the wavemeter is better than $\pm 10\%$ and is still better if carefully constructed and used. For the most accuracy the wavemeter can be calibrated if the necessary equipment is available.

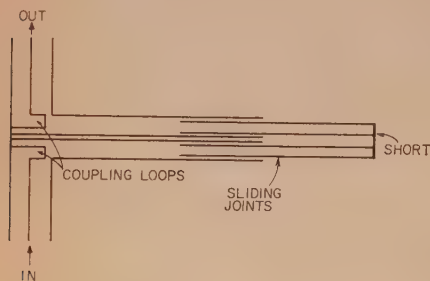


Fig. 1—Coax wavemeter with input and output loops. A direct connecting type may be made as in fig. 2B.

The wavemeter is basically a section of coax transmission line of variable length with shorts at both ends. Coupling loops are provided to couple energy in and out of the cavity. (See fig. 1.)


At frequencies for which the line is a half wave length or some multiple of a half wave length long, energy is transferred from one loop to the other much more effectively than at other frequencies.

The secret in the construction of this wavemeter is in the use of brass tubing available at most hobby shops. This tubing comes in sizes from less than 1/16 inch in diameter to a size somewhat less than 1/2 inch in diameter. The diameters and the wall thicknesses are chosen so that pieces of the tubing will telescope with a good fit. The tubing is reasonable in price since a 12 inch piece costs less than 50 cents. About six pieces will be needed along with the connectors so the total cost should be less than five dollars.

For the details of construction see the drawings in fig. 2.

As is obvious from the drawings, construction is not a highly precise operation. The tubing can be cut in any number of ways. The neatest way probably is to use a fine toothed saw such as a razor saw, also available at hobby shops. The hardest operation is to get the ends of the pieces that fit against the body to the right shape. This shaping and the shaping

Fig. 2A—Loop coupled model. Sliding section is inserted in T section as shown in fig. 1.

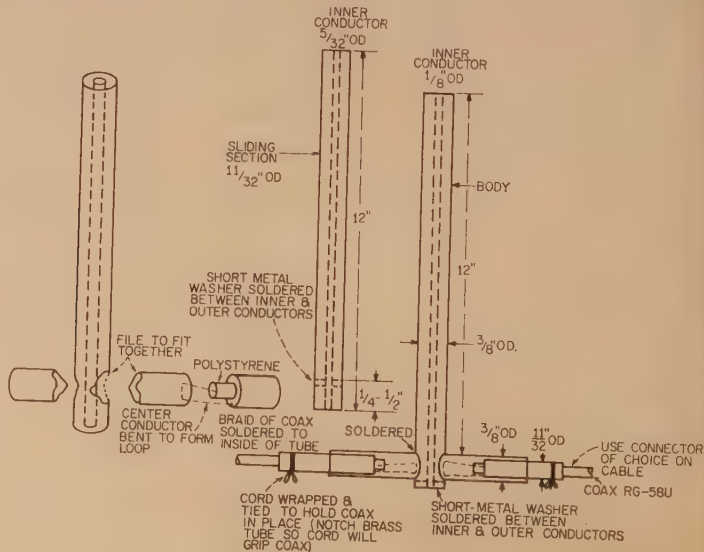

the holes over which these pieces fit can be accomplished with a rat tail file. These pieces do not have to fit perfectly since the loops can be covered with solder. Where dimensions are not given on the drawings they can be chosen at the builders convenience.

When the construction of the model with loops is finished it is necessary to position the coupling loops. This is not critical and can be done by remembering that maximum coupling occurs when the center conductor of the wavemeter and the loops lie in the same plane. Coupling drops as the loops are pulled away from the center conductor. Since, if anything, the coupling is apt to be too light the easiest thing to do is to run the loops in until they hit the center conductor and then back them out a little. Once the loops are positioned, the tubes to which the coax is soldered can be soldered to the tubes connected to the main body to prevent the loops from shifting position.

Construction Methods

There are all manner of ways in which these things could be constructed. One can mount BNC receptacles on the side arms and fasten the loops to them. If a sturdier junction between the body and the side arms is desired, it is possible to buy a brass 'T' used with copper tubing and jam the brass tubing into it before soldering. If a loop coupled model with more coupling is desired the coupling can be increased to some extent by using loops with more than one turn.

Operation

To use the wavemeter it is necessary to pick up some of the signal to be measured and run it through the wavemeter into a detector of some sort. See fig. 3.

The detector can be a 1N34 diode or some other feeding a milliammeter. The length of

the wavemeter is varied until a peak is found. If necessary the sliding section is pulled out and reversed. With the short toward the loops it is possible to measure from 500 mc up. With the short in the sliding section away from the loops the range is from about 300 to 500 mc. If only one peak is found the frequency can be computed by taking the distance between the shorts to be one half wave length. If it is possible to find several peaks the previous method can be used if the sliding short is in the position nearest the loops which will give a peak. It is also possible to take the distance between points at which peaks are found as one half wavelength. The frequency in megacycles can be found by using the formula.

$$f(mc) = \frac{5905}{L \text{ (inches)}} \text{ where } L = \frac{1}{2} \text{ wave length}$$

If one has access to an accurately calibrated signal generator in the right frequency range it is possible to calibrate the wavemeter for improved accuracy.

The table below gives the performance of the loop coupled model.

The following gives some of the performance data for the two models constructed here. Measurements were made with the wavemeter [Continued on page 114]




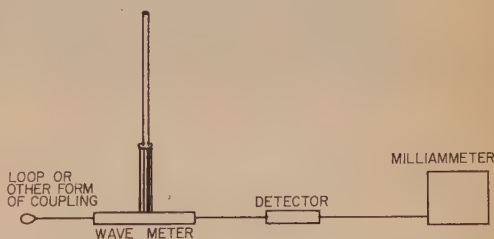


Fig. 3—The output of the wavemeter is fed to a detector and then to an indicating milliammeter.

Fig. 2B—Wavemeter with input and output connection made to the center conductor.

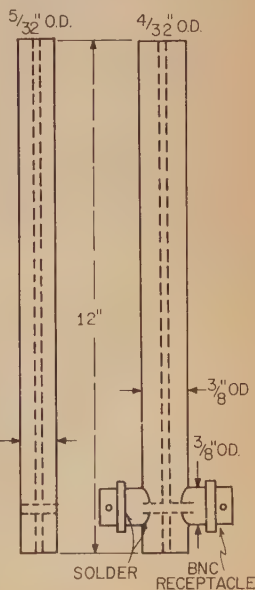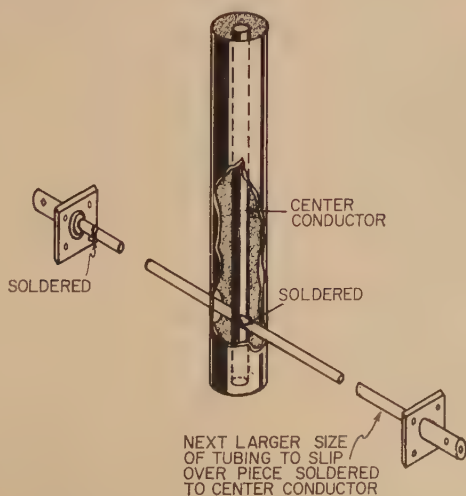

HALF GALLON WATER COOLED TRANSISTORIZED POWER SUPPLY

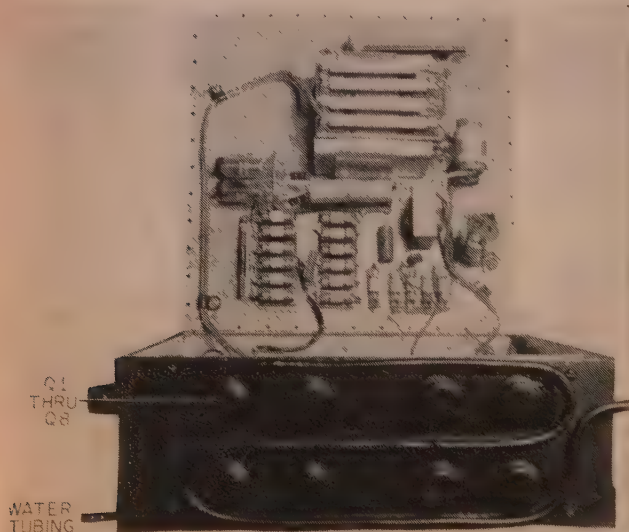

Murray Gellman, K2CBO

1268 East 12th Street
Brooklyn 30, N. Y.

Five hundred watts mobile demands a high efficiency power supply. Transistors, which have been a happy solution to low and medium power mobile power supplies are used in this 2000 volt supply. This light weight transistorized supply has an efficiency of about 75%.

A water cooled *Eimac* 4W300B is used in the transmitter mounted in the trunk of K2CBO's automobile. The power supply is also water cooled for maximum cooling. However, for amateur type intermittent operation water cooling is not necessary. The supply is connected to the battery through #2 wires and a 100 amp fuse. An alternator type charging system (such as Leece Neville) assures that the battery is kept charged. This supply has been in operation since November 1958 with excellent results.

The unit is actually two supplies. A commercial transistorized power supply was stripped down and built on the same chassis with the 2000 volt supply. Only the 2000 volt section is described. The reader may adopt any other supply which will provide his low voltage and bias requirements.

Construction

All components are mounted on a SeeZak 4x 4 x 12 chassis as shown in the photographs.

A suitable transformer is available from

Signal Transformer Co., Brooklyn, N. Y., part no. C1102. The transformer may also be constructed by the ambitious amateur.

Transformer Core

An *Arnold AJH-79* stripped down from the inside to $\frac{3}{8}$ inch thickness is used as the transformer core. This is achieved by peeling the laminations from the inside of the core until the correct thickness is reached. Two cardboard forms are required, one for each leg of the core. The coils are wound on the forms, and the transformer is assembled by slipping the completed coils on the core (as shown by figure 1). The core sections are strapped together with banding strap (used by crate packers). When winding connections have been properly made, the transformer should be baked and varnished.

Transformer Windings

The two coils are identically constructed as follows: One layer, 18 turns of #15 wire insulated from the secondary by 2 x .002 inch Mylar is wound first to form the feedback winding. Over this wind the secondary with 976 turns of #26 wire. Eight layers of 122 turns each are insulated from each other by .003 inch Kraft paper. Over the top layer wind .002 inch Mylar to insulate the secondary from


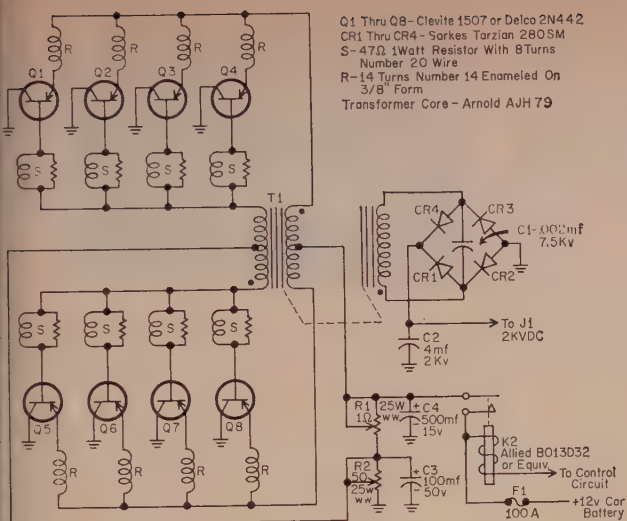


Fig. 1—Core and winding arrangement. Core is from a stripped down Arnold AJH-79.

Fig. 2—Circuit of the 2000 volt transistorized, water cooled power supply.

the next winding, the primary. Wind two layers of 5 turns each of 50 x 350 HF rectangular wire insulated from each other by 2 x .005 Kraft paper, to form the primary.

Proper connections of the windings after putting the transformer together may be made by using a two volt *ac* transformer and an *ac* voltmeter. Connect the primary windings in series and connect the two volt *ac* transformer across the total primary. Measure the voltage across each half of the feed-back winding. The two voltages should be identical. The feed-back windings are then connected in series. Measure the voltage across the entire feed-back winding. If the voltage is less than half, or zero, compared to the measurement of each section, reverse the series connection. When properly connected the total voltage should be double that of each section. Follow the same procedure as for the feed-back winding to determine proper connections for the secondary winding.


Transistor Mounting

The next step in construction of the power supply is to mount the transistors in a manner which insures proper cooling. A copper plate, 3 3/8 x 11 x 1/4 inches is used to mount the transistors. If water cooling is used, make three hair pin turns of 1/4 inch OD soft drawn refrigerator type copper tubing, and solder to the copper plate using a blow torch and heavy soldering iron. About 4 feet of tubing is required. Drill all holes for mounting the plate and transistors. Coat the transistors with *Amphenol 53-307* silicone compound before mounting them on the copper plate. This compound effectively transfers the heat generated by the transistors to the copper plate.

The completed transformer, transistor plate, and other components may now be mounted on the chassis for wiring. Examine the photographs for the layout of parts. Eight suppressors are

[Continued on page 113]

Inside view of both the 200 and 2000 volt supplies. Only the 2000 volt unit is described.

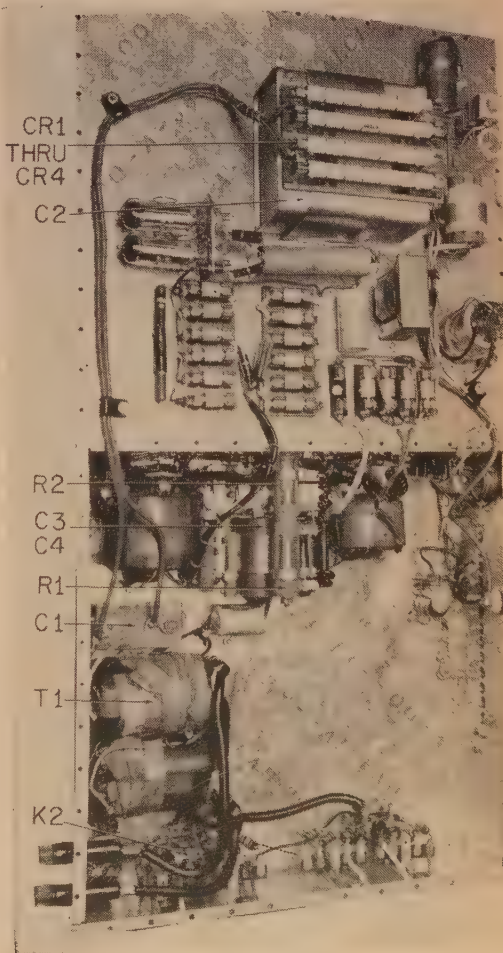

Russel A. Garlin, W3BCZ

211 Berry St.
West Pittston, Pa.



Do you beleive in the supernatural? I don't, or do I???? At five o'clock this morning (the 13th) I suddenly awoke and I knew, just as sure as I'm sitting here writing this, that a familiar voice was calling me from somewhere in this world.

Let me go back a few months and give you some background material which will, I am sure, sway your belief just a little in case you are one of those who are not superstitious.

My radio station (W3BCZ) is located at my summer home. About fifteen miles up in the mountain and my reason for having it there, aside from the fact that the surroundings are beautiful, is the complete lack of complaints from TVI (no neighbors). During the summer months I am on the air several nights a week but when the frost comes on the punkin I move back to town where the heat is a little more plentiful. I do manage to shovel my way through occasionally during the winter.

Several months ago after finishing a QSO with a foreign station (DX is my hobby and as a rule I do not listen much in the American section of the 20 meter band) I tuned the receiver back across the American band and happened to hear a W3 calling me on my frequency. He was signing portable KH6 and so I immediately retuned the *vfo* and gave him a call. We had a very nice QSO and I found that he was from a neighboring town (Swoyersville) and was now stationed on the French frigate Shoals 400 miles northwest of Hawaii. At the end of the QSO he told me he would be returning in a few weeks and would look me up then. I guess his plans were changed as he did not arrive and, frankly I forgot about him after that.

About a month later I decided to spend the night at the shack and after trying for an hour and having no luck because of very poor radio conditions, I decided to turn in and try it again early in the morning.

I had taken an old alarm clock with me, and unfortunately, dropped it as I was getting out of the car. I did get it working, I thought, and set it for 5:00 am and so after undressing, etc. turned in.

Before continuing with my story, I suppose I should go back just a little further and tell you something about the physical layout of the shack. First I have a large plastic globe, of the inflatable type, which is on a long arm and can be swung around in front of the transmitter or

back in front of the bunk bed, when it gets in my way. Before turning in I turned the transmitter off but kept the receiver filaments lit, swung the globe around in front of the transmitter and then lit a small oil stove and set it in front of the bed. So much for that night.

Suddenly I heard a loud explosion, sat straight up in bed, and much to my consternation saw that the globe had gradually swung back in front of the bed, come in contact with the oil stove, and had blown a hole in the side. The alarm clock said 2 am but since it was daylight I looked at my wrist watch and saw it was shortly after seven. I found that the clock had stopped. I felt I had wasted a night, but, without bothering to dress went over to receiver and snapped the send/receive switch to receive and heard a voice saying "W3BCZ, are you listening this morning".

I quickly turned the transmitter on and after a very short warmup made a few hasty QRZ's. To my pleasant surprise the station came right back and announced that he was W3ZJU in Palmyra. Now my home town is Palmyra, Pennsylvania and I do have a few ham friends there but it didn't seem possible that the skip could be that short so I asked him if he was in Palmyra, Pennsylvania or in the South Pacific. He replied, don't you recognize me? This is John from Swoyersville and I'm on Palmyra Island, in the Pacific. We had a nice QSO and to me the night was then complete.

After signing off I started thinking; just why did the alarm clock stop, why did my receiver happen to be tuned exactly to the frequency John was transmitting on, why did the explosion occur at the exact moment John was calling me and why, oh why, did the hole in the globe appear right at the Palmyra Island????

Now are you starting to believe just a little in the supernatural; or is it just a case of pure mental telepathy?

Well, I told some of my friends about it and then forgot all about it but this morning when I suddenly awoke at exactly 5:00 am I knew that John was calling me from somewhere on the globe. What could I do? Well there was nothing to do but go back to sleep since I was 15 miles from my transmitter. But one of these mornings it wil happen again and this time I'll be prepared because I'm hastily setting up a small station at my home and I won't disappoint John again.

Beeper A Keying Monitor

In the interest of generating clean signals, both novices and more experienced amateurs should include as a station necessity, some sort of monitor for checking the quality of keyed signals. Such is *Beeper*.

Wade Williams, K5ILG

2327 Wheeling Ave.
El Paso, Texas

Bernie Hirsch, K5ITB

9205 Mt. Olympus Rd.
El Paso, Texas

Since the mind and reflexes of the newcomer have not yet been indoctrinated to the complexities of operating his station, it is sometimes difficult to keep track of the various mechanical operations that are required.

I often wonder how many times we throw the transmit switch without first reducing the *rf* gain of the station receiver, the result being a deafening blast in the headphones. The classical solution is obvious; this being the simple action of muting the receiver when in the transmit position. This, however, leaves us with a far more serious problem; that of providing a means of monitoring the keyed signal with the receiver silenced.

The monitor described here serves the primary function of silencing the receiver to a tolerable level by reducing the gain to a point where monitoring is feasible, but blasting impossible.

After experimenting with several designs, we found that the "Beeper" was the simplest and most practical since no surgery to the transmitter is required for installation.

The chassis work is non-critical in nature. Any small aluminum 4" x 6" unit may be employed. The layout of the components is also non-critical. Any convenient arrangement will do.

Operation

The basic theory is simple. Some *rf* from the transmitter is sampled, rectified by the IN34 diode. The filter has a short time constant so the voltage fed to the audio oscillator ceases where the *rf* is cut. This voltage powers the oscillator. The oscillator output is then

coupled to a single stage of audio amplification which drives a speaker. No *rf*-no output.

While the circuit is self-explanatory, there are a few notes that should be kept in mind. The transistor transformer is an Argonne AR-105, manufactured by Lafayette Radio Co. It has a primary of 20K and a 400 to 800 ohm secondary which serves as a combination oscillator transformer and interstage coupling transformer. An audio output transformer rated 5000 ohms to voice coil was found to be most satisfactory, however this will depend on the type of transistor selected and the impedance of the speaker used.

Physical placement of the pickup probe will depend on the availability of *rf*. Due to the extra high degree of sensitivity in this particular monitor, very little *rf* will be required for successful operation.

After you have constructed the "Beeper," you will find that the strength and tonal qualities are quite suitable for the average cw operator.


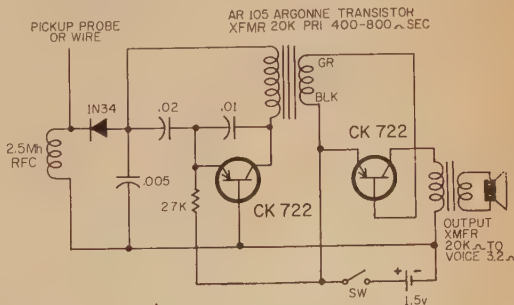


Fig. 1—Circuit of a simple keying monitor.

"The Pan-Scope"

Cheap and Easy Panoramic Reception

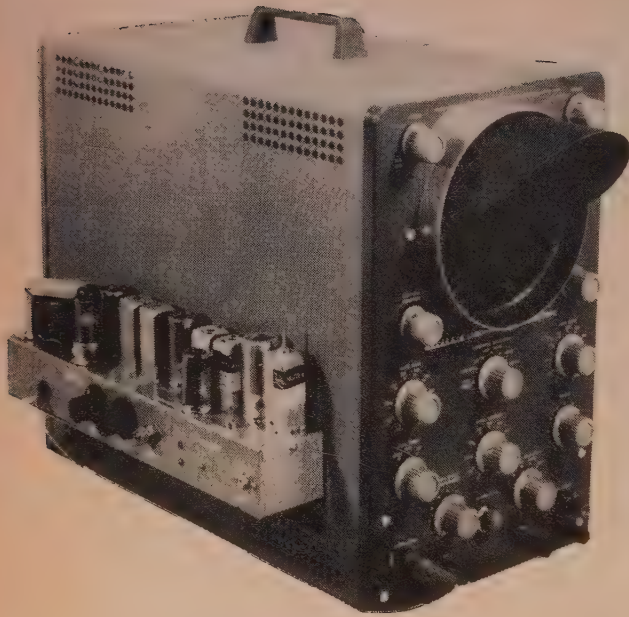

Louis I. Hutton, WØRF

2608 South Fern
Wichita 17, Kansas

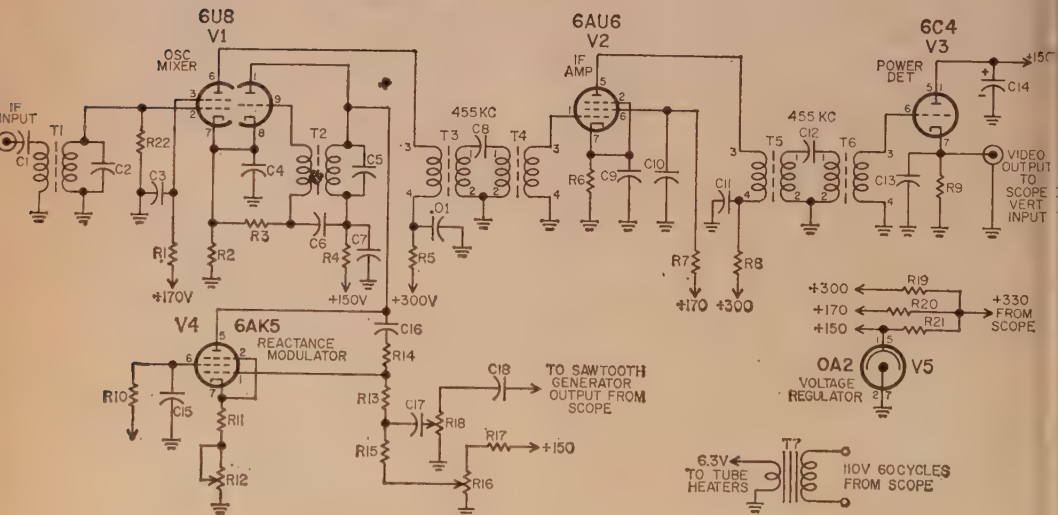


Fig. 1—Schematic diagram of the Pan-Scope.

Parts List

C1-10 uuf disc
C2-25 uuf disc
C3-.01 250v paper
C4-.05 250v paper
C5-56 uuf silver mica
C6-200 uuf silver mica
C7-680 uuf silver mica
C8-1 uuf tubular ceramic
C9-.01 250v paper
C10-.01 250v paper
C11-.01 400v paper
C12-1 uuf tubular ceramic
C13-50 uuf disc
C14-8mf 350v electro.
C15-.01 250v paper

C16-100 uuf silver mica
C17-1 mfd 200v paper
C18-1 mfd 400v paper
C19-.01 mfd 250v paper
R1-33k ½w carbon
R2-680 ohms ½w carbon
R3-47k ½w carbon
R4-8.2k ½w carbon
R5-4.7k ½w carbon
R6-1.5k ½w carbon
R7-4.7k ½w carbon
R8-4.7k ½w carbon
R9-1 meg ½w carbon
R10-4.7k ½w carbon
R11-100 ohm ½w carbon

R12-10 k 2w potentiometer
(linearity)
R13-270k ½w carbon
R14-3.3 k ½w carbon
R15-680 k ½w carbon
R16-50 k 2w potentiometer
(center frequency)

R17-15 k ½w carbon
R18-500k 2w potentiometer
(sweep width)
R19-4.7 k 2w carbon
R20-110 k 2w carbon
R21-15 k 2w carbon
R22-10 k ½w carbon

T-1 1600 kc ant. coil K-tran 13-WI
T-2 oscillator coil J. W. Miller 70-OSC
T3-455 kc If Transformer K-tran 12-C2
T4-455 kc If Transformer K-tran 12-C2
T5-455 kc If Transformer K-tran 12-C2
T6-455 kc If Transformer K-tran 12-C2
T-7 Filament Transformer 6.3v 2a Stancor P-6134

With the publication of Mr. Bishop's article in "The Snooper" in CQ of August and September 1952, the theory of panoramic reception became available to anyone interested in the subject. The question which arose in the writer's mind was how could this system be used with a commercial oscilloscope. The following is the results of the author's effort to build an inexpensive adaptor which will provide elementary panoramic display on a 5" scope when connected to a receiver with an *if* of from 950 kc to 2215 kc. The usefulness of the oscilloscope is not impaired in any way.

Circuit Description

The "Pan-Scope" adaptor circuit consists of a simple three-tube super heterodyne (see fig. 1) (V1, V2, V3) receiver whose local oscillator is caused to shift in frequency by a reactance modulator tube (V4) driven from a sawtooth signal. Supply voltages and the sawtooth signal are taken from the oscilloscope. Video output is sent to the vertical input of the oscilloscope. A filament transformer is provided to reduce current drain on the scope power supply. The voltage regulator (V5) is used to supply stabilized voltage. To improve the selectivity of the 455 kc *if* amplifier dual transformers with loose coupling were incorporated as shown in fig. 4.

Construction

The adaptor is constructed on a 2 1/4" x 2 1/4" x 12" chassis as shown in the photos and layout of fig. 2. An octal socket is mounted on the rear apron of the oscilloscope chassis to provide power and sweep voltages to the adaptor power cable. The output from the adaptor is connected to the scope vertical input through a shielded cable and bannana plug. Placement of internal parts during and after construction did not appear critical. The sawtooth signal is taken from the output of the scope sweep generator as shown in fig. 3. Control knobs are provided for the center frequency (R-16) and sweep width (R-18) potentiometers, as they are adjusted during operation of the unit. A screwdriver adjustment is provided for the linearity control (R-12). Decals were used to label the various major components and functions.

Installation and Adjustment

The alignment and adjustment of the unit is as follows: Connect a *vvm* to the video output cable. Connect an *rf* signal generator to the *if* Input" jack. Set the center frequency control to mid-rotation point. Set the sweep width control to "Off" position. Set linearity control to mid-rotation position. Turn on scope and adjust so that trace is sweeping at approximately 60 cps. Set signal generator to 455 kc and adjust *if* transformers T3, T4, T5, [Continued on page 113]

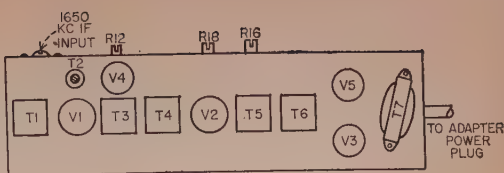


Fig. 2—Parts location; top view.

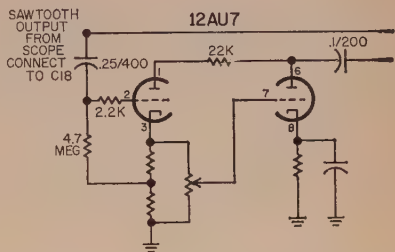


Fig. 3—Portion of the Heathkit O-12 oscilloscope showing the take off point for the sawtooth.




Fig. 4—IF transformer wiring.

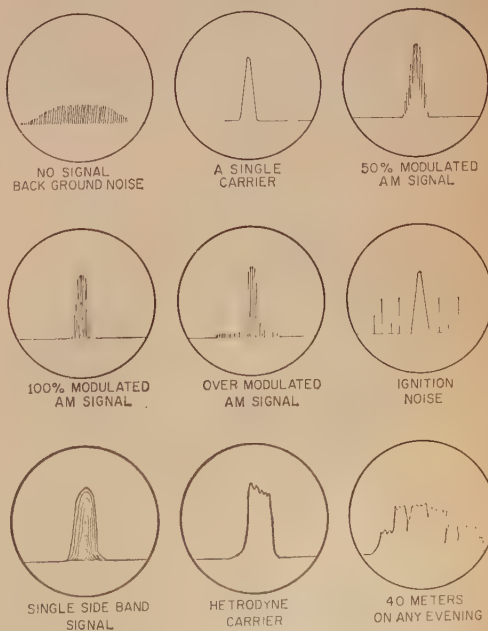


Fig. 5—Some typical Pan-Scope patterns.

Audio Peak Limiting

Howard S. Holzer, K6RAN

4221 Creed Ave.
Los Angeles 8, Calif.

Every month upon receiving my edition of CQ, I first glance quickly through the front portion to see the various worthy modifications and additions other fellow amateurs have spent endless hours developing, then generously offering for publication to advance the art. Like a child in a candy store, I dream of having one of each, for there are few that would not be beneficial to my station. Being a realist makes this an impossibility, so dreams slowly fade until the next month's edition of my CQ arrives.

One thing, however, that makes these very fine innovations not too appealing to me personally is that many are of the *outboard variety*. I can just picture my station full of unlabelled black crackle finished *do-good* boxes, and me trying in vain to remember what wonderful function each is supposed to perform.

The gadgets that are really most catching to me are circuit and/or component changes in existing kit or commercial equipment that the manufacturing engineers did not incorporate. This is my cue to offer a small but very useful gimmick for those fortunate enough to own a Heath Sideband Adapter, or for that matter any speech input system that uses a 12AX7. This modification makes use of 100% of the existing circuitry in the SB-10, and the addition of perhaps \$10.00 in new parts, if the shack's cupboard is absolutely bare.

Needless to say there have been more than ample articles published that extol the use of audio compression, peak limiting, clipping or call it what you may. We all know that broadcast stations use audio limiting to prevent overmodulation and keep the apparent level of intelligence high. Being a recording engineer by trade, I can tell you from experience that those loud Rock & Roll records you undoubtedly have heard and cursed, could not be possible without the use of a good old *Altec Lansing A322C* limiter amp. or its equal. First of all, the cutting stylus would make excursions that would wipe out the adjacent groove, (if the cutting head didn't lost its armature winding after the first hot audio peak hit the poor thing). If you are a purist in the highest of Hi-Fi, I hate to shatter your dreams, but, even the best of those long hair recordings lose some of their dynamic range through a limiter amplifier, (and I have never seen a high quality recording studio that didn't have one of these brutes yet). Wait ! ! ! ! Before you lose your mind and leave the Hi Fi out with that expensive record library, let me explain. If the cutterhead driving amp was adjusted to put out maximum permissible recording level (without limiting) at the loudest crescendo of your favorite 120 piece symphonic group, the poor flutest, or other soloist, requested to play soft (whether by conductor or composer), would be buried down in the mud, rumble, hum, hiss, or what have you in your most elaborate system. Need I clarify more?

Upon the prodding of K6HXT (alias W6-KRM pre-war call) a dyed in the wool 1600 meter DX fiend, I set out to come up with something that would approach the performance of the *Altec A322C*, but not quite as elaborate since the monster is at least as large as my humble DX-100B. Unlike some clipper circuits that create much harmonic distortion only to be filtered out with well shielded bulky

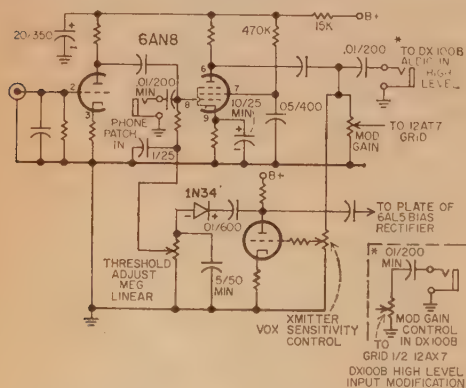


Fig. 1—Modified SB-10 input circuit including the peak limiter. Only the parts labeled are needed for the modification. Unlabeled parts are the same as those in the SB-10. The new parts should all be miniature.

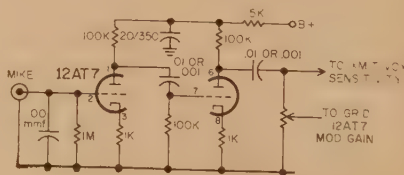


Fig. 2—Original SB-10 input circuit.

audio inductances, and associated components, this audio limiter, like the recording types, operates on the *avc* principle of your good receiver. It differs only in the fact that the threshold is continuously adjustable to suit the necessary operating conditions. (See fig. 1). As an *avc* circuitry, audio is rectified negatively, filtered, and fed back into a controllable pentode. I chose to use a 6AN8 primarily because the triode section had the same pin connections as the familiar 12AX7. The gain of the triode section in the 6AN8 is lower than that of one-half the 12AX7 used in the Heath SB-10, but with pentode section added it makes up for and surpasses the cascaded 12AX7. (Fig. 2).

In the sideband adapter the 12AX7 cathode resistor, plate load, and grid return (input half) was untouched for the triode section of the 6AN8. It was necessary to change the filament connection, add a cathode by-pass capacitor, screen dropping resistor with associated by-pass condenser, and move the grounded end of the grid return resistor, (100K) already existing, to a tie point where it could pick up the *avc* voltage from the threshold pot. The *avc* voltage was picked off at the plate of the *vox* portion of the 6AL5 duo-diode through a blocking condenser. I used a 1N34 diode to rectify the audio and a 1 Meg Linear Taper pot for the load, filtered by a .5 mfd 50v miniature condenser. The *avc* voltage is always being developed, but that is where the pot comes in. By moving the arm from minimum to maximum, one can set the desired point where the developed bias overcomes the 6AN8 pentode's cathode derived bias, thereby reducing the gain of this stage. Different operators will need different threshold points, depending upon their mikes, voices, etc., so the variable threshold is necessary for versatility. In operation the time constant (attack time), though not as good as the professional limiter is more than adequate, and this is stated without exaggeration. Only if very near to maximum limiting is used will the speech system seem to swallow or punch holes in the modulation. I might add that this would occur only if total available limiting was used with the operator only one inch from the mike screaming CQ DX. In that case it is suggested that the person QSY to vocal power communication instead of using *rf*.

To set the device up properly, one should set the gain control to get proper *maximum modulation* by talking softly slightly further

back from the mike than used in normal practice. Then, slowly increasing the level of voice and getting closer to the mike, adjust the threshold pot so as to prevent the louder peaks from raising the modulation indicator (meter or etc.) any higher. The user will be very pleased to find that over a wide range of amplitude his modulation will always be hitting what he has set up to be the maximum safe amount for the particular rig.

Looking at the SB-10 schematic at first glance it seems that the *vox* threshold pot would also affect the limiting threshold too since the bias for limiting is derived from one half of the 12AT7 that drives the relay portion of the same tube through a 6AL5 (one half) diode. All I can say to you sharp fellows is that if you have enough *af* to *vox* your machine, you have more than ample signal to rectify for the limiting bias. O.K.? Incidentally, that is one of the nice features about the gadget. In the SB-10, it does not require any additional stages of gain to get enough audio rectified for the *avc*.


In my lashup I have installed miniature jacks on the sideband adapter and the DX-100 so a small patchcord pipes audio from one to the other when changing from AM to SSB without moving the mike connector. (Fig. 3) Since the addition of the limiter in the SB adapter I always use the front end of it to supply audio to the DX-100.

On initial performance tests, K6HXT (whose QTH is in Calabasas, Cal., about 40 miles as the crow flies from mine) tied a standard broadcast VU meter across the audio output line and adjusted the *rf* Gain to receive my AM carrier to S9 on his trusty SX28 receiver. The audio gain was then set to obtain 0 VU from my loudest modulation peaks, (which were held to 100% modulation by constantly monitoring my Xmitter output with a scope). While I backed off from the mike, Phil (K6DVB) kept on raising the modulation gain control so as to maintain 100% modulation as my voice increasingly got softer with distance. He then adjusted the threshold so that no matter where I stood in the shack (a room about 8' by 10' in the basement) the peaks registered the same whether I spoke normally or shouted pretty dog-gone loud, and I mean loud. Roy, over in the hidden hills of Calabasas, then QSY'd down to the broadcast band monitoring some of the most potent AM stations in L.A. (50 kw) Without changing the audio gain, but, adjusting the *rf* sensitivity to S9 (same as my carrier strength), he noted that the BC stations rarely ever hit zero and most of the loudest passages of their program material hit -2 db below the 0 reference on the VU meter. He also noted that the dynamic range of my audio varied very little and the duration of words and phrases kept the decibel meter hovering around the 0 mark with very





Fig. 3—Location of the components added to the front panel.

[Continued on page 112]

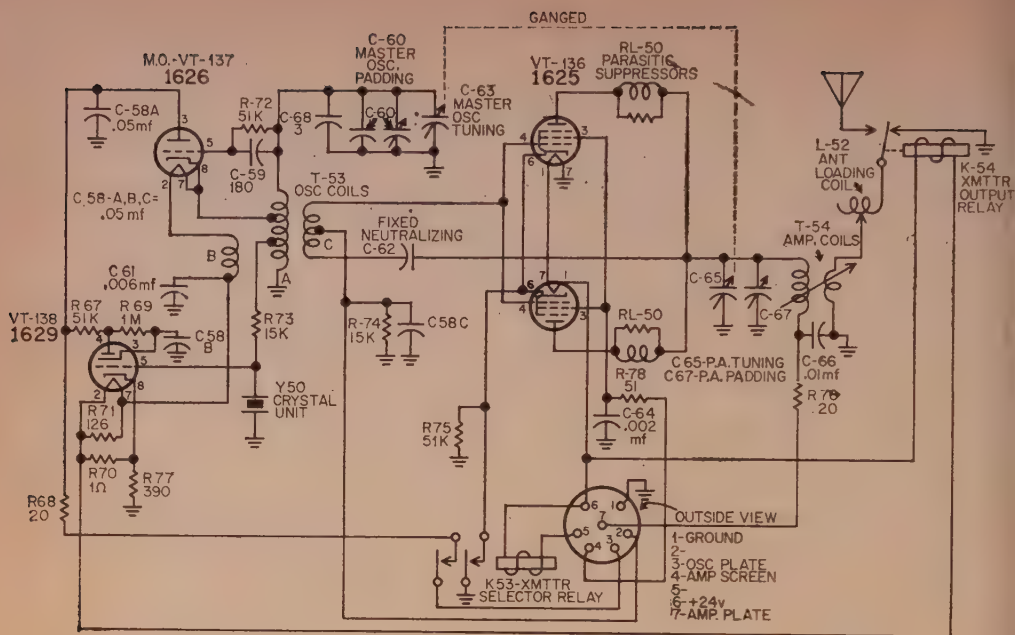

Another Approach To DSB Conversion Of Command Transmitters

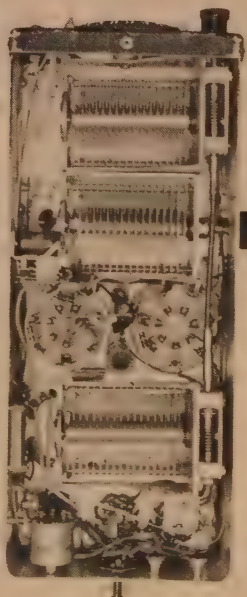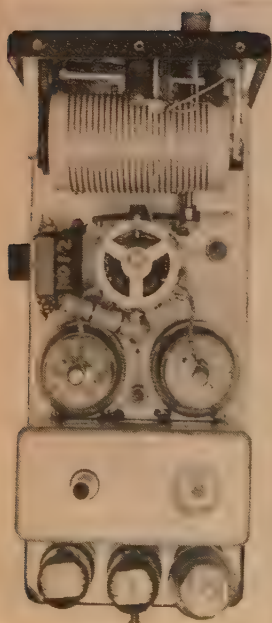

Richard G. Fenner, W5AVI
1232 Dumont Drive
Richardson, Texas

Modifying 1625's and 807's for Linear Amplifier Use

C. A. Morgan, W9LRM

810 South Burdette St.
Mishawaka, Ind.

Having recently received a rejuvenation of interest in Amateur Radio resulting from an introduction to single sideband techniques and modes of operation, the writer became particularly interested in "do it yourself" grounded grid linear amplifiers. This is due to the simplified circuitry involved and the comparative lack of some of the functional difficulties experienced before newly constructed apparatus can be made to operate properly.

Several amplifiers have been built and successfully operated using various types of tubes. From the standpoint of low cost, coupled with enough power output to give a good account of itself on the air (which I believe is still of interest to at least a few amateurs today), an amplifier was designed so as to be capable of using the type 837 and 1625 tubes in grounded grid. We will limit our coverage here to show how the tube modifications and interchangeability were worked out in a typical amplifier.

The amplifier was originally designed to use four type 837 tubes, a type having a 12.6 volt filament and requiring a 7 prong socket.

After the initial thrill of operation of the new amplifier wore off a little, it was decided to try the type 1625 tubes in this same socket. A few 1625 tubes of brands other than RCA were acquired. (RCA tubes cannot be modified since separating the cathode and beam forming plate leads in the tube base pins, still leaves them connected together in the envelope.) All other makes which happened to be available were satisfactory in this respect. The tubes were

modified as has been suggested by cutting a rectangular slot in the side of the base, above the #5 and #6 pins. The two leads are then pulled out from the #6 pin, separated, and checked for an open circuit between them, with an ohmmeter. It may be necessary to untwist the leads to accomplish this on some tubes. It was found that some could not be electrically separated or although not showing continuity when the filament was cold, would regain it when the filament was heated. These tubes were reconnected as they were originally and set aside for other uses.

When continuity between the beam forming element and the cathode has been satisfactorily removed, current will flow only when the cathode lead is connected as in fig. 1. Once the leads are identified, the cathode lead is soldered into pin #6 and the beam forming plate lead into pin #5. A piece of tape is then wrapped around the base covering the rectangular slot. Tubes so modified are then directly interchangeable with 837's.

Having gone this far and also having accumulated a supply of 807 tubes of makes other than RCA (the same exception about separating the leads applies), it was decided to modify some of these for further interchangeability.

The modification is similar to that done on the 1625 tubes except that the slot is cut in the side of the base above the #3 and #4 pins and after separating and identifying the leads as previously outlined, the beam forming plate lead is soldered into the #3 pin, which is already

[Continued on page 111]

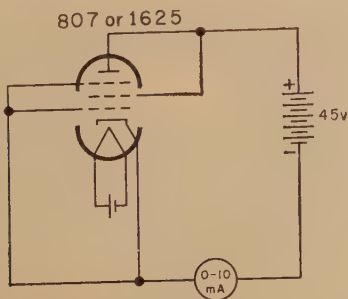


Fig. 1—Simple circuit used to test effectiveness of cathode and beam plate separation.

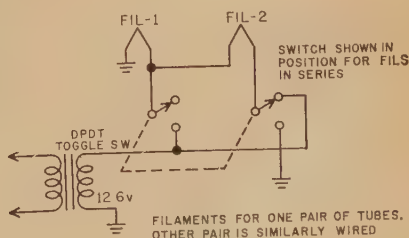


Fig. 2—Switching arrangement used to select circuit for 6 or 12 volt filaments.

"Little Nic"

Transistorized 6 Meter Transmitter

Just before press time Captain Sury notified us that he has replaced TR1, a 2N499, with an RCA 2N384. The result has been doubled power output without any modification.

Capt. John J. Sury, K8NIC/5

4325 South 6th Street
Abilene, Texas

Many of our Technicians and General Class license holders feel that a lot of power is needed to make contacts above 50 mc. within a 50 mile radius, especially when the band is not open. This is not necessarily so. Try this 40 milliwatt transmitter and find out for yourself.

Forty-six contacts have been made so far, of which only about 20% have been pre-arranged. A report of S-2 was given to the author on a 6 meter 5 element beam antenna. This was a modulated transmission at a distance of approximately 30 miles across a large city (Dayton, Ohio) and hilly terrain. With a 1/2 wave indoor halo antenna, contacts of 15 miles were experienced with signal reports of S-3 and audio read 100%. (The author lived in a wire meshed screen reinforced stucco apartment). In all contacts so far, a maximum of 50 milliwatts input was used. Several 6 mile contacts were made using only 15 milliwatts input with S-4 and S-5 signal reports using a matched gamma indoor antenna. All contacts mentioned were modulated except one which was cw.

The Cost

With the increase in production of vhf-uhf transistors, the prices have gradually dropped to within the reach of the ham. All of the components were purchased for approximately \$24.00, including a 0-1 milliamp miniature meter. Some of the components were purchased from the local dealers while the remainder were purchased from the surplus market. The miniature variable capacitors used may be purchased for less than 70¢ surplus.

Prior to the writing of this article the author tested the Philco 2N588 MADT transistor in place of the 2N499, and it was found to be satisfactory, providing the bias adjustment pot was increased from 100K to 200K. The 2N588 sells for less than \$3.00 while the 2N499 sells for more than \$5.00. The characteristics are similar and they both are vhf-uhf Micro Alloy Diffused-base (MADT) transistors.



The crystal is a 50 mc 3rd overtone which sells for slightly more than \$3.00. It is also possible that a 7158 kc surplus crystal could be operated on its 7th mode with a sacrifice of output.

Construction

Drill the chassis and panel. The first step is to lay out the holes to be drilled on the chassis. Next, lay out all holes to be drilled on the panel. The lower holes on the panel should be drilled with the panel clamped to the chassis. Drill chassis and panel as shown on the layout diagram. Remove all burrs from the holes. File the rectangular holes to fit the transistor sockets snugly.

Start mounting all of the components on the chassis, including the 1/2 inch standoff. The standoff makes a good mount for L1 by soldering one end to it. In order to keep from wiring the transistors backwards, which is dangerous, 3 pin sockets should be used for the modulator transistors (2N190) and the oscillator transistor (2N499 or 2N588). A four pin socket should be used for the power amplifier 2N384 transistor.

Mount the coil socket L2 by sliding the ring

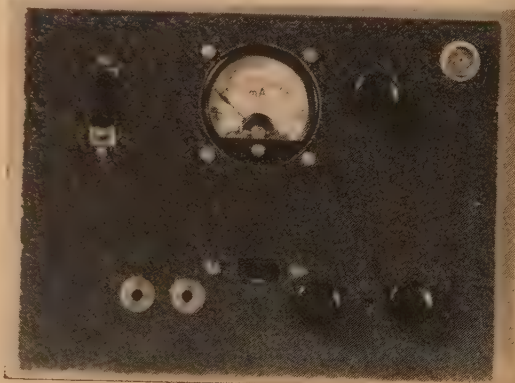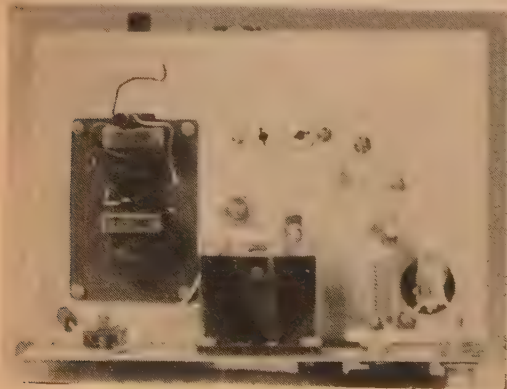

Install panel and mount S1, J2, C1, C7, S2 and J3 as indicated. Do not install the meter until wiring is completed as rough handling may damage it. S3 on the rear of the chassis may be deleted from the circuit if you intend operating phone only. When operating cw, S3 cuts off the modulator, reducing power consumption.

L1 and L2 are made from a B & W mini-inductor 3007 ($\frac{5}{8}$ inch diameter, 16 turns to the inch). Cut off 6 turns each for L1 and L2. L3 is 2 turns of plastic covered #24 wire. Install L1 on the standoff (one end of the coil). Make up coil L2 on the 71-4S plug. Connect ends of coil to pins 1 and 3. L3 is wrapped over L2 leaving extra long leads. Lay L2, L3 aside for later use.

Before inserting the transistors, make sure that the schematic, as far as wiring is concerned, was followed to the letter. After the circuit is checked carefully, the battery may be connected.

Turn on a 6 meter receiver. Tune in the frequency of the transmitter. The signal from the transmitter should peg the S meter on the receiver. Plug in the microphone and talk into it normally to check the modulation

NOTE
ALL CAPS mF EXCEPT
WHEN INDICATED
MIC SHOULD BE LOW IMP
DYNAMIC

2N384

RED DOT

S = SHIELD
E = EMITTER
B = BASE
C = COLLECTIVE

B
E G

2N499
2N588

B
E G

2N190

E B C

2T ANT

B & W 3007

71-4S

78-54S

P₁ P₂ P₃

L1 ASSEMBLY

L2, L3 ASSEMBLY

TOP VIEW "LITTLE NIC"

February, 1960 • CQ • 55

Phone Patch

George Postels, DDS, W9SA

1866 Sheridan Road
Highland Park, Ill.

In January '59 my son Bob graduated from the University of Illinois. Armed with a B.S. degree in geology, courage and confidence, he set out for Tucson, Arizona. It was his intention to work until September, and then enter the University of Arizona for graduate work. He couldn't let any of that GI Bill go to waste! However, he soon found that jobs were not as easy to come by in the great southwest as they had been in Illinois, and he and his parents put in a worrisome six weeks.

The phone bills were mounting. What to do?

Firing up the rig on ten meters I soon heard just what I was looking for. A rich southern accent on 29.3 mc was announcing, "This is W7CKV, the Tucson Monitor Station," and it's owner was arranging phone patches with military precision. I announced my presence and finally it got to be my turn. "What can I do for you?" was the businesslike question. I stated that I had a son who was living on a ranch outside Tucson, and could I get a patch to him? "Sure," was the cheerful reply. "Give me the phone number and I'll give him a buzz." Unfortunately, Bob wasn't in, but I enjoyed a most satisfactory conversation with the lady who owned the ranch, and whose hospitality I was later to enjoy. She assured me that both Bob and Dick (his room-mate and a jet pilot) were happy and well. She suggested that I call Sunday when she knew Bob would be there. The phone patch quality was excellent. W7CKV said, "When you call in Sunday refer to patch #68, and you won't have to give me the phone number and name again." Efficient?

On Sunday we talked to Bob with difficulty. The week-end QRM combined with the "Listeners in" on the rural line added up to problems. Harry, owner of W7CKV, suggested that Bob

come to his home the following Wednesday afternoon, that being the day I lay down the instruments of my profession in favor of the mike. This time the contact was perfect and we talked ourselves dry—Harry meanwhile worrying about the several other stations awaiting their turns for patches. I'm afraid I was a bit inconsiderate in monopolizing things that day.

The following weeks saw many contacts completed with some interesting coincidences. Once, I just happened to hear Harry tell another Tucson station, "Bob is on the phone now, and wants to know if I've talked to his dad, I'll see if George is on." Needless to say George was on! Another time I came home from the office on Saturday noon and said to my wife, "I think I'll go down and see if Harry has heard from Bob." Turning on the receiver I heard Harry calling "W9SA." It seemed Bob was going to Nogales for the week-end to see a bull fight, and was anxious to talk to us before he took off. Mental telepathy or coincidence?

But I'm getting ahead of my story. Bob did get a job working for the U.S. Agriculture Department and we all breathed easier. Meantime, between phone patches, Harry and I would have some good old rag-chew, and I soon began to regard him as an old friend.

We had planned a trip to Arizona in early March, long before Bob had decided to seek his fortune there. So, on Feb. 28th we boarded a TWA plane for Las Vegas. After thirty-six hours there we still had enough money left to rent a car and make a leisurely trip to the Grand Canyon, Phoenix, and to the ranch that Bob called home. What a spot! Set right down in the Tucson Mountains, it presented a most beautiful vista. No wonder Bob was so in love with it.

The big highlight of our trip was the day Bob introduced me to my friend Harry. People who think hams are kinda peculiar, and wonder what we see in talking to perfect strangers, should be there when those "Strangers" meet personally the first time. After a hearty handshake the contest was on to see who could talk the fastest, Harry or I. On the way back to the ranch Bob announced that he thought the vocal contest was a draw. I did listen long enough to learn this:

Harry had lived in Virginia where he had
[Continued on page 111]



L to R—Bob, Harry-W7CKV, George-W9SA.

30 Minute Antenna For Two Meters

Antonio Gelineau

5 Falcon Ave.
Miami Springs, Fla.

Having worked out the design and construction details in my mind and having all materials needed at hand, the assembly to the final coupling to the Viking 6N2 transmitter was a matter of 30 minutes.

The antenna was designed primarily for indoor and portable use. The coaxial antenna design was chosen for its inherent characteristic of having the lowest angle of radiation of any of the vertical antennae. Physical design made it quite suitable for easy mounting and ease of portability.

The Viking 6N2 operates with an input of 15 watts on two meters. The results using this antenna have been very gratifying and power transfer losses from transmitter to antenna are nil due to direct coupling.

Losses occur, of course, from indoor locations and vary from one point to another. However, due to the low angle of radiation, from the antenna and nil power transfer loss, we compensate for location loss.

I cover the Greater Miami area on two meters and consistently receive reports that are better than I had when using an outdoor vertical with a 50 foot feed line. (No doubt line losses must have been high.)

For test purposes I ran a power extension out doors and set up the 6N2 transmitter, with this antenna, on a three foot box. This put the radiating portion of the antenna about six feet above ground surface.

The results were most gratifying. Reports far exceeded any expectations and indicated the antenna should be an excellent addition to a portable transmitter.

In the design I have used a right angle coax coupling to fit coax receptacle on back of the 6N2 transmitter. In transmitters where the coax receptacle is mounted on top of the case, a straight coupling can be used in antenna construction.

Photographs show parts and construction of the antenna while the sketch gives the dimensions. These dimensions can be altered slightly to suit the materials at hand.

Construction

1. The $\frac{5}{8}$ " I.D. piece of tubing is cut to a length of 19 inches. One end is slightly crimped inward so as to allow the coax coupling to be threaded inside tubing.

2. The insulating ring or grommet is then fitted over this end of the tubing acting as a spacer for the inner conductor. I used one half of a 1" diameter feed through insulator with a layer of tape to insure a snug fit. (See

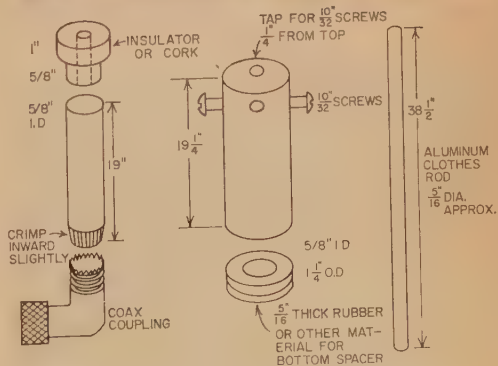
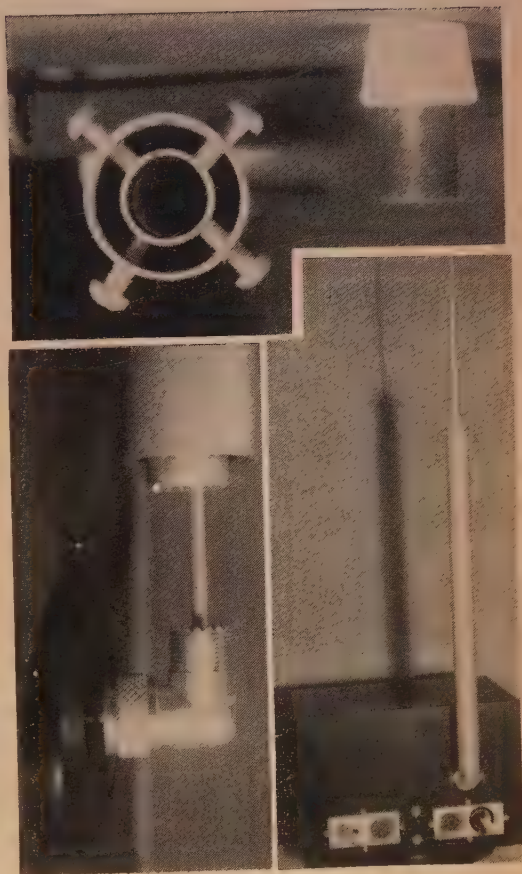


Fig. 1—Construction details and photos of the finished antenna for two meters.

photo.) If the insulator is not available a cork or wood plug will also do. After insulator is fitted put it aside until step 5 is reached.

3. The coax coupling is then threaded into the tapered end of the tubing.

4. The 38 1/2 inch length of aluminum


[Continued on page 104]

10-15-20 meter quad


Devilcatcher

Don Powell, W0AIN

Lewellen, Nebraska

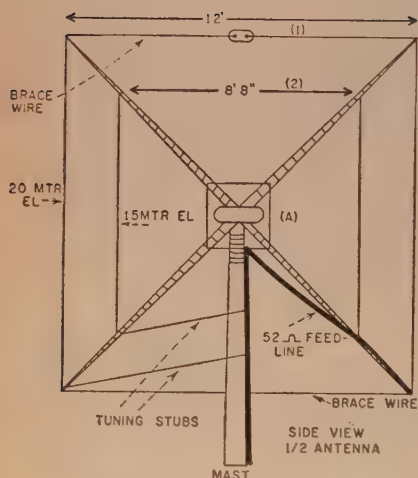

Side View.

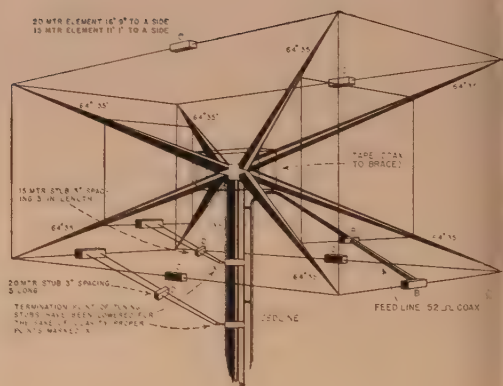

The neighbors stare, of course. The idea of this gadget was to build a quad as simply as possible and still have something that would be there after a few of our gentle breezes had caressed it.

By running the bamboo supports out at an angle the usual boom has been eliminated and we end up with an antenna that weighs about fifteen pounds. Credit for the angled support idea goes to W0ZAA, with W0PZH at the slide rule for the angles and dimensions, plus the fabrication of the center welded support.

Only one feedline is used since it connects into both the twenty and fifteen meter quads. On ten meters the twenty meter quad works fine, presenting two full waves instead of one full wave.

The guy wires probably should be Glassline (April '55 CQ, p. 24), but I used some #18 wire broken in the center with a small insulator. The elements were #18 Copperweld wire which helps make the whole structure very strong, yet adding little to the weight.

The Devilcatcher is mounted on a 35 foot mast and has withstood several heavy storms (50-60 mph winds). Lots of good DX has been worked (40 countries in the first few weeks) and I'm real happy with it. And, best of all, the whole works cost under \$20!



Heath Kit VFO on 6 and 2— No Conversion

Don Gerken, W6NKN

122 E. Neece St.
Long Beach, Calif.

By tuning the 40-20-15-10 meter calibrating condenser to minimum capacity, switching the *vfo* to the 11 meter position and using the 11 meter calibrating condenser to calibrate the 40-20-15-10 meter dial reading, the heath can be used on 6 and 2.

With the *vfo* in the original 40-20-15-10 meter position the dial may now be calibrated for 6 and 2 meters by marking on the dial.

To avoid confusion remark the *vfo*. The 11 meter position is now the 40-20-15-10 meter position, and the original 40-20-15-10 meter position is now the 6 and 2 meter position.

Step By Step Screwdriver Adjustment

Assuming the *vfo* is in operating condition and was calibrated according to the original instructions these adjustments can be made without removing the *vfo* from the cabinet.

1. Turn the *vfo* on and allow it to warm up.
2. Set it on the low end of the 40-20-15-10 meter position, around 28,000, and listen for it on the 10 meter band. The other bands can be used but this has a wider spread on the dial.
3. Insert a screwdriver in the left front hole on top of the *vfo* until it is in place on the calibrating condenser.
4. Turn this condenser with the screwdriver slowly, a little at a time, and follow the *vfo* signal up the band in the receiver as far as it will go. (The condenser is now at minimum capacity.)
5. Switch the *vfo* to the 11 meter position.
6. Insert the screwdriver in the center front hole on the bottom of the *vfo* until it is in place on the calibrating condenser. (The *vfo* will have to be layed on its side.)
7. Turn this condenser with the screwdriver slowly and follow the *vfo* signal back down the band to the same spot on the receiver where it was at the start. (Around 28,000). If the receiver readings at the beginning and at the end of the adjustments of the *vfo* were the same, it should be as accurate as it was at the start. (However, the recalibration can be done as the Heath Kit manual explained, using the 11 meter position and calibrating condenser.
8. To stop confusion remark the *vfo*. The 11 meter position is now the 40-20-15-10 meter position, and the original 40-20-15-10 meter position is now the 6 and 2 meter position. This can be done with decals, paper and scotch tape or paint.

9. To calibrate the 6 meter position the dial itself will have to be marked. Use a pencil to start with. Turn on a 6 meter transmitter or its oscillator (with a known crystal frequency) and listen to it in the 6 meter receiver. Turn off the oscillator and turn on the *vfo* in the 6 meter position and turn the dial until its signal is heard in the same place on the receiver. Mark this place on the *vfo* dial, the same frequency as the crystal controlled transmitter on 6 meters. There are two places on the dial that can be marked and they are 180 degrees from each other. Mark them both as one may give more room than the other. Repeat this with other known crystal frequencies.

10. To calibrate for 2 meters mark the dial in the same way, this time using a 2 meter oscillator and receiver.

Note: This will work into an oscillator on 8 mc but may not into one doubling. ■



Relays

643 Aurora Avenue,
Santa Barbara, California

This idea was the result of a search for a resistor. The solution to the problem provided a single-switch station control system, answered the question of what to do with "war surplus" 24—28 volt *dc* relays, and made use of power that would have otherwise been wasted.

While building a 25-watt class AB1 modulator, it was discovered that we did not have a 250 ohm resistor of suitable wattage for use in the cathode circuit of the 807's. Thrashing around in the junk box, we came up with several 24-volt *dc* relays, and noticed that the coil resistance was in the neighborhood of 250 ohms. One of the relays was a double-pole, double-throw antenna switching relay with ceramic insulation. This, we decided, would be our cathode resistor.

Leads from the 807 cathodes (connected together at the tube bases) and the chassis ground were brought out to the octal connector on the rear of the modulator. From this connector, they would go to the relay, located away from the modulator. A 50 mf 50 volt capacitor was placed from the cathodes to ground, directly at one 807 tube base.

The relay was mounted in a small box and the box fitted with three coaxial panel-type connectors—one for antenna, one for receiver, and one for transmitter. Since we were going to use coax to feed our antenna, that left a set of contacts unused on this particular relay. A two connection terminal strip was also mounted on the box and, inside, connected to the normally-closed side of the otherwise unused contacts. These would now switch the receiver B+. The circuit for our system is shown in *fig. 1*.

Then came the big moment. We fired up the modulator, threw the B+ switch (it breaks the center tap of the high-voltage winding on the modulator power transformer) and the relay banged shut as cathode current from the 807s flowed through the coil. The antenna was switched from receive to transmit, and the receiver disabled. Turned off the modulator B+ and the relay opened. Pretty slick, huh?

The only problem encountered was that the relay did not let go until about three seconds after the modulator B+ had been turned off. Grounding the 807 cathodes as the B+ was

switched off cleared this up. This was accomplished by replacing the SPST modulator B+ switch with a DPDT switch, and connecting one side to the cathodes in such a manner that when the B+ was switched off the cathodes would be grounded.

Flushed with success, we tried this with our ARC-4 two meter transmitter, to make use of the built-in crystal-switching relays. The relays, through the use of a suitable selector switch, were used in place of the 832A final amplifier cathode resistor. The 832A never seemed to know the difference, and we had a dandy means of switching crystals.

The current through the relay used with the modulator was checked and found to be around 80 *ma* with no signal applied to the input of the modulator. This is sufficient to keep the relay closed and the additional current with modulation seems to have no effect on it after it is closed. The voltage runs around 24-

[Continued on page 96]


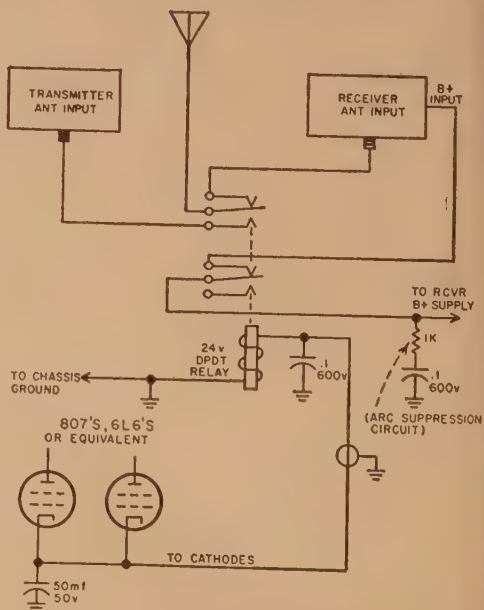


Fig.1 .—Simplified circuit of the cathode operated relay.

Ham Anagram

CQ, CQ, CQ. Attention all you puzzle-working hams! Got a leisure moment to spend between QSO's? Here is an anagram puzzle built around Q-Signals, ham lingo and electronic words and abbreviations, that you will have fun working. You had better watch out though, there are quite a few tricky clues designed to mislead you! For correct answers see page 96.

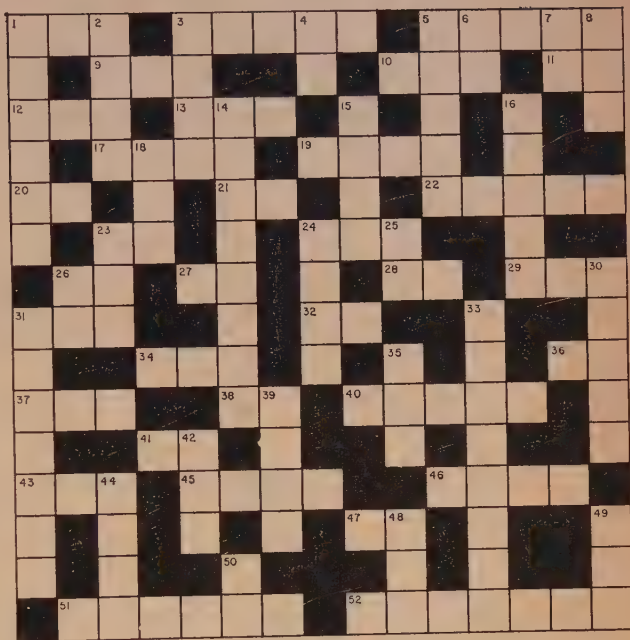

ACROSS

1. Complete amateur station.
3. A combination of antennas or antenna elements.
5. A jumper cord used to make connections to a telephone line.
9. When your rig is on the you better watch your language!
10. Unit of transmission line impedance.
11. A unit of current flow.
12. Your rig should not cause this.
13. Choke coil used at radio frequencies (abbr.).
17. Zero.
19. An effect noticeable at high frequencies.
20. Resistance-capacitance (abbr.).
21. 73's to you, ...
22. Highest U. S. amateur license class.
23. The frequency band between 1 and 7.5 meters (abbr.).
24. How many can you send, OM?
26. Master Oscillator (abbr.).
27. Not a gas tube (abbr.).
28. Calling all stations.

29. Something hams chew over the air.
31. A semi-automatic key.
32. Volume unit (abbr.).
34. Static interference.
36. Screen resistor (letters-symbol).
37. Oscillator (abbr.).
38. Glass tube (abbr.).
40. Undesirable pitch heard along with CW.
41. Radiotelegraphy.
43. A device pounded by many hams.
45. What's?
46. What you learn to send with a key.
47. A class of amplification.
51. The FCC gave you yours.
52. Complete path for current flow.

DOWN

1. A beam.
2. How much an amplifier can amplify a given signal.
3. An organization of hams.
4. Audio frequency (abbr.).
5. Short for radiotelephone.
6. The type of modulation spelt out by dit-dah, dah-dah.
7. Short wavelengths are expressed in this unit (abbr.).

8. What you are.
14. A free grid.
15. A ring shaped zone surrounding a transmitter, within which there is no reception.
16. Motor on a beam antenna.
18. The band between 400 and 3,000 mc. (abbr.).
23. A station's record book.
24. A meter often used to check wavelength.
25. A unit of frequency equal to one-million cycles (abbr.).
26. Amplification factor (letters-symbol).
30. A vacuum tube with a leak is said to be
31. A type of grid keying.
33. Ghost of a fundamental frequency.
35. The band of frequencies between 50 and 300 mc. (abbr.).
39. A type of oscillator (abbr.).
42. Call letters of the National Bureau of Standards, Washington, D.C.
44. A type of antenna named after its Japanese inventor.
48. Does your rig cause this in nearby radio receivers?
49. A number of stations connected by radio.
50. Neon (abbr.).

Tricks With The Collins 75A-2

Robert R. Renfro Jr. KP4AMU ex-W7ROM

Box 10365, Caparra Heights
San Juan, Puerto Rico

In many cases communication receivers are mis-used or not used to their full capabilities. Sometimes features built into the receivers are not utilized at all due to a misunderstanding on the part of the operator as to *how* to use them. Probably while attempting to use them at one time or another, they seemed to degrade the receiver performance. From then on they remain dormant. This is true of crystal filters, Q-multipliers etc.

It is the purpose of this paper to present information to aid the user of the Collins 75A-2 receiver. Of course, these instructions can be modified or expanded as desired for other equipment.

A serious drawback of the receiver is apparent splatter from an SSB signal when trying to copy a nearby (frequency wise) AM signal. This splatter is generated in the receiver due to a characteristic of the *agc* system. When the receiver is switched to the AM position, *agc* is automatically switched on. To avoid splatter, it is necessary to disable the *agc*. To do this, turn the AM-CW-FM switch to CW. Slowly turn the switch toward AM until the *bfo* stops working. Leave the switch in this position, halfway between CW and AM. You can now receive AM with no *agc* action. Of course, the *rf* gain must now be operated manually to prevent front end overload.

In cases of extreme pulse type noise such as power line leakage, this same position of the switch can be used for additional limiting afforded by the *cw* limiter. Merely advance the *cw* limiter control for the desired amount of limiting. The AM limiter is still operative.

Now let's set the receiver up for SSB reception. The instructions given here are somewhat different than the instructions given in the handbook and other similar sources. However, due to the characteristics of this receiver, these instructions should be followed.

First, it is necessary to align the *bfo* internally so the front panel *bfo* calibration can be relied on. To do this, set the receiver up for AM with the selectivity on "4". Tune in a calibration signal, preferably a 100 *kc* crystal calibrator. Tune for the sharp peak in the S-meter. Switch re-

ceiver to *cw* and reduce the *rf* gain to a suitable level. Turn the *bfo* pitch control to the center line. Open the lid on the receiver and locate the *bfo* coil. It is the can that the pitch control shaft runs to. Adjust the top slug for zero beat. Turn selectivity to "O". With the Zero set, move the fiducial (kilocycle hairline) to cover one of the kilocycle marks. Move *bfo* pitch control to "-1". Move the tuning knob higher in frequency until zero beat is obtained. See if the kilocycle dial scale has moved **exactly one kc**. If zero beat can not be obtained by tuning higher in frequency, loosen the *bfo* pitch knob and rotate it 180° on the shaft.

The *bfo* panel markings can now be relied on. When tuned to "-1", it means the *bfo* is operating one *kc* below the *if* of 455 *kc*, or 454 *kc*.

The position of the *bfo* pitch control to receive upper sideband will be in the vicinity of "-1". However to obtain the exact position proceed as follows.

Set selectivity to "1" or "2" depending on how much interference is present on the band. Tune in the calibration signal and peak it on the S-meter. Be sure the phasing control is on the center line. With the antenna trimmer, adjust for an S-meter reading of S-9. If this can not be obtained, try it on another band. Tune the receiver higher in frequency until the S-meter drops to S-6 or about 18 *db*. Switch the receiver to CW and adjust the *bfo* pitch for zero beat. It should be in the vicinity of "-1". This is the correct position of the pitch control for receiving upper sideband. Do all the tuning with the tuning control. The only time the pitch control should be moved is if the selectivity is changed. As the selectivity is increased, the *bfo* pitch moves closer to the center line. For lower sideband, tune the receiver lower in frequency in the above instructions.

For accurate frequency reading the SSB signal, it is necessary to offset the fiducial the same amount the *bfo* pitch is set away from the center line. This is a simple matter. After the receiver controls are set for SSB, tune in the calibration signal and adjust the tuning control until it is zero beat. Move the zero set until fiducial indicates the calibration signal frequen-

The calibration frequency must be known to within a few hundred cps to make this adjustment worthwhile. Now, when an SSB signal is tuned in and sounds natural, the dial will indicate the SSB signal frequency. For upper sideband, the fiducial will be displaced about one kc to the right.



Now we will try our hand at exalted carrier reception. First, let's see what we can gain by using this method of reception. You have probably been in a QSO with a station running about -9 on the meter. Very solid copy up until the time someone throws on a 20 db over S-9 signal. The voice you were listening to is no longer readable as it is crushed under this heavy signal. Switching to exalted carrier reception changes the situation. Instead of hearing one strong signal covering up a weak one, you can now hear

two distinct voices, both of them readable. You just have to separate them with your mind; concentrate on the one you want to hear. Also, you have probably tried to pull in that DX station that was way down in the receiver noise level. By using exalted carrier reception, his voice now comes through quite readable.

You are probably wondering why I keep referring to voices. Well, the reason is because when we adjust the receiver for exalted carrier reception, that's all there is left of the incoming signal, just the voice. We have in a sense turned the AM signal into an SSB signal and then supplied a large QRM free carrier to demodulate it. In fact, it is difficult to distinguish AM from SSB when the receiver is set up properly.

Here's how to adjust the receiver. Tune in

[Continued on page 104]

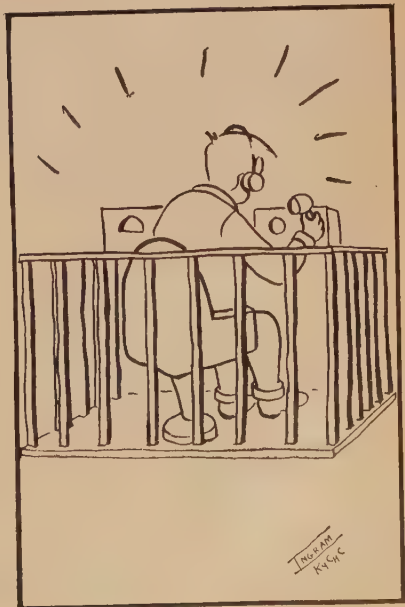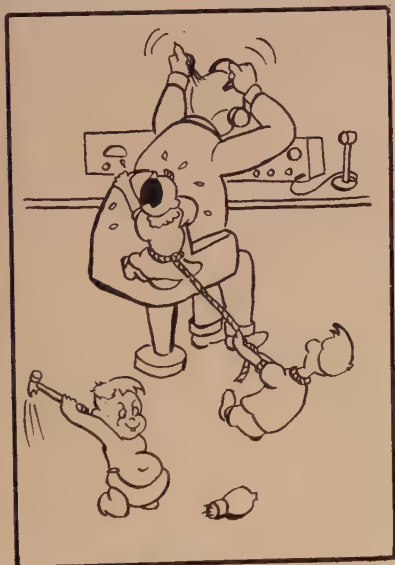

DX DX DX DX DX DX DX DX

The following certificates were issued between November 15th and December 15th, 1959:

WAZ

1222	W7ABO	Francis A. Burnell
1223	W6GWW	Harry G. Loretz
1224	WØDMA	Alva A. Smith
1225	SP6FZ	Jan Ziembicki
1226	W2ESO	Eugene Black
1227	SM5YG	Tage V. Magnusson
1228	W5VIR	Sheldon C. Klock, Jr.
1229	W7MCT	C. E. Russell
1230	G6RC	R. P. Cole
1231	W8EYE	R. L. Davis
1232	SM5LN	Martin Höglund
1233	W3AYD	Michael Solomon
1234	VE7QL	Douglas G. Hall
1235	K6OWQ	Mary P. Schultz
1236	W3TMZ	Jack D. Colson
1237	W8TTN	Philip F. Frichbaum
1238	SM6VY	Karl A. Wallmark
1239	W2PCJ	Larry Amodeo
1240	W9GHK	W. B. "Bill" Bahr
1241	W2UTH	Henry A. Blodgett
1242	SM5BRO	Sigfrid Gahnberg
1243	VE7CQ	Doug Brabner
1244	K6SHJ	Frans J. Janson
1245	DL3WV	Hans Waitz
1246	W2ICO	James MacGeorge
1247	WØAIH/VE3	Rev. Paul E. Bittner
1248	VK3RP	Page E. Barrow
1249	CN8BP	M. Galland Remy
1250	OH2NB	Armas Valste
1251	W9WIO	James Zvolanek
1252	SM5AJR	Gunnar Johansson
1253	WØCTW	R. H. Weihe
1254	VK3HL	Allen T. Butchings

88	DJ1VS
89	W8UMR
90	K9CLO
91	W3AYD
92	W1HWH

Dr. Edelmann
John M. Sulak
William H. Branche
Michael Solomon
Irving C. DeHart

All-Phone WAZ

47 DL7AB

Dr. Gerhard Baez

WPX Honor Roll

W2HMJ	553	KAPFC	330
W6KG	473	W6YY	330
W8KPL	453	WØSNL	327
W5KC	447	K9EAB	319
OK1MB	428	G3EYN	318
K6CQM	409	DJ1VS	316
W5AFX	407	VK6WT	316
W2EQS	401	W2GT	316
W1NLM	400	F9MS	315
W9UXO	390	K6SXA	315
W4OPM	387	PAØVO	315
W1EQ	377	SM5W1	312
W2PTD	374	SM5AHK	311
W9YSX	368	W2HO	311
W3BQA	367	W5BRR	311
W9DYG	367	W8RQ	311
W4AZK	365	PAØLY	310
VE3DIF	365	W9BPW	310
DL7CS	356	W3AYD	309
W5OLG	356	DJ3BB	308
W6WO	356	SM5BCE	308
W8LY	354	K2UKQ	307
W5AWT	353	W9YNB	307
WØPGI	353	DL1QT	306
W5DA	351	K5LIA	306
W2MUM	350	OK3DG	306
W8JIN	350	UA9DN	306
VK3KB	349	K4HXF	305
W11JB	349	SM5AMJ	305
W9IU	344		

CW WPX

83	W4IMI	K. A. Cole
84	W9YNB	Norman O. Merz
85	K2UKQ	Kay Gaynor
86	W8IBX	Kurt Meyers
87	W5BRR	George T. DeLaMatyr

VE3BWY	305	W4IMI	301
W5AZB	305	W8IBX	301
W1BFT	304	W8TTN	301
W6RLP	304	W0GUV	301
OK1AEH	304	W0QYE	301
SM5CCE	304	K4JVE	300
W1FZ	304	K4KOY	300
W8UMR	303	KL7MF	300
W9VIn	303	PY4AO	300
K9CLO	302	W2FXA	300
W3DBX	302	W3BCY	300
W5LGG	302	W3LMA	300
W0DMA	302	W4GXB	300
JA2JW	301	EA4CR	299
K9AGB	301	W1HWH	299
LU5AQ	301	W0GUV	299
PY4OD	301		
SM5AJU	301	W3UXX	286
W2DGW	301	OK1BY	207
W4HYW	301	W4OMW	207

Phone WPX

W8WT	460	DL3TJ	305
CT1PK	409	F8PI	302
G3DO	400	PY1NC	302
PY2CK	354	W9UZZ	302
W5ERY	315	VE1ADE	250
ZP5CF	306		

SSB WPX

TI2HP	231	W0CVU	155
K9EAB	204	W2OTZ	153
K2MGE	203	W2TP	153
W1GE	183	W5RHW	152
W6BAF	170	W8YBZ	152
W3MAC	165	W0FUH	151
VE3MR	164	W5DA	150
K2HEA	160	W6TNS	150
TG9AD	160	K2JFV	148
MP4BBW	158	W2VZV	147

As you all probably know by now, Don, W4KVX, our former DX editor and editor of the best DX publication in the world, experienced an unfortunate happening.

On the evening of November 28th (a Saturday night) the building in which Don publishes and prints the magazine DX, and also where he has his TV service business burned to the ground. Almost everything was lost including two TV service trucks, two color TV sets and all of the printing equipment for DX as well as all of Don's transmitting gear and test equipment for the service business. Out of the holocaust he managed to save 1 press camera, the slides of the KS4BB expedition, 1 typewriter (out of 5) and the shirt on his back and in Don's words, even it was scorched.

Fortunately out of the catastrophe, Don was able to save or rather salvage all of the addressograph plates for the mailing list for DX. These were made of metal except for the frames and the Ohio Valley Amateur Radio Association is restoring them and will send out a letter in approximately one week with all details of what happened.

Don was not insured so the loss is complete and total. The building was a three-story wooden structure built in 1910 as a barn on the farm near Burlington, Ky. It was 45 by 60 feet. Due to the fact that the nearest fire department

was several miles away and was a volunteer department, Don was unable to get fire insurance. The fire started in the loft of the building and had a good start before it was detected. Don was on the ground floor off the shack, which was fairly well sound proofed and was not aware that anything was wrong until it was too late.

More equipment and other things may have been saved but Don was busy getting his house trailer moved while waiting for the Fire Dept. to arrive. The house trailer was on blocks alongside the barn and would have been consumed by the fire had it not been moved in time. He was fortunate enough to be able to save it so he does have a place to live. Water was available from the main house on the farm but by the time the fire department arrived the heat was too intense to get close enough to do anything. If I know Don, "DX" will probably be rolling off the press before you read this. I hope so. I've "lifted" many items from his publication in the past and I'd sure hate to stop now.

Mail

The following is a copy of a letter received by W7GBW from VU2SX.

"Dear George, OM:

First of all, many thanks for the QSO of yesterday, for which a QSL card is enclosed. Conditions were rather good, and then it was a real pleasure to get across to you all in W-land. Regarding your query, here is the dope, as far as I know. AC4AX, Shankar, is not active at the moment, but he is getting ready with a new Xmitter and a new Rhombic, which he will fire in the near future; he usually works CW at about 14050, and during weekends at about 0230 to 0430 GMT, which is mornings here. AC5PN, Chhawna, is also about during the same time and frequency. AC5SQ, Saja, formally AC3 and AC4SQ, will be on the air soon from Bhutan. Again, he works mostly weekends. All these people are Government Officers attached to the Indian diplomatic group in these countries, and have little time, except on weekends, to come on the air. We have received many inquiries about an AC3, AC4, AC5AA, and also about an 9N9AA. All these seem to come from one source which, of course, is a pirate. If you hear any such sigs, please get on to him and ask him for QTH and name, and pass the info to me. We are after him, and wish to put him out of business. 9N1AA is King Mahendra of Nepal, and reports say he is getting ready to start, but so far I haven't heard him."

Looks like there's still hope for AC3, 4 and 5. (Txn WVDXC)

9N1 Nepal—The long anticipated activity from Nepal has finally started. 9N1GW has been putting a terrific signal into the states on 20 meter SSB. He is Glenn Ward. QSL to P. O. Box 9136, Washington, D.C. There will be about five 9N1's on very shortly.

DL4 Germany—W7QCK/4, the most recent

holder of DL4FE, received a package of QSL's that belong to the former holder of the call. Anyone knowing who this might be could drop a line to W7QCK/4 at L. G. Hegsted, 1252 Brookwood Drive, Winston-Salem, North Carolina.

EAØ Spanish Guinea—Masoko, EAØAF, has been off the air due to a heavy work schedule but will be very active now on Sundays and Mondays. (Tnx "DX")

KH6 Hawaii—Jerry of KA8KW fame is now KH6DMP. A color photo QSL is promised to all who work Jerry on the low end of 20. His now QTH is: Col. Jerry Branch, 623 Sperry Loop, APO 915, San Francisco, California.

KP6 Palmyra Island—KH6JEM is planning a DXpedition to Palmyra sometime in February. You will remember Harry for his SSB efforts as KH6JEM/KJ6.

ST2 Sudan—ST2AR would very much like a QSO with Nevada to complete his WAS. He will be on 14 and 21 mc SSB very soon. (Tnx WGDXC)

UAØ Tannu Tuva—UAØKYA is now on from this spot. CW and fone are used with fone on 14145 kc. Tannu Tuva was a separate country at one time. It is still Zone 23 for the benefit of WAZ hunters.

VK4 Willis Island—If you are fortunate to locate in your past logs—about May, 1955—an entry for Mick, VK4IC on 14 mc phone, you've got a brand new DXCC country, because Mick was operating from Willis Island at the time. (Tnx "DX")

VK4DS is also due on shortly using SSB. (Tnx WVDXC)

XW8 Laos—Panh, W8AL, says XW8AC is the only other currently active Laos station and he's presently working 10 meter phone. XW8AI is now en route to Guadeloupe and will become an FG7 about January 1st, he reports. (Tnx "DX")

ZM6 Western Samoa—A newcomer to ZM6 land is Noel, ZM6AB. He is active around 0500 GMT on 20 meter CW with a home-brew rig running 150 watts to a 4-125 final. His QTH is c/o Faleolo Airport, Private Bag, Western Samoa. (Tnx W6PHF/FO8AW)

One of the better-known Belgian DXer's, Bob, ON4QX. Bob is also a renown DXpeditioner, having been to such places as 3A2 and LX.



160 Meter DX

W6KIP/ZL3RB schedules on 160 were resumed on November 16th as reported by VE2AZI/G3GGN and W6KIP was heard by ZL3RB the first test. These famous schedules made propagation history in 1959 when W6KIP's signals were heard in ZL land every week proving that the N/S path was open during high sunspot activity while the E/W path was closed. Alex/W6KIP is a little discouraged, however, with his QTH's high noise level which makes it impossible to hear the real weak ones.

VE3BWY/ex G6WW and VE3AYE—make a good team and intend to give 160 good coverage this year. BWY is PASTOR H. A. Maxwell Whyte, using Valiant/200 Watts. He is F. O. CEM/DX-BERTA-DXCC (twice) WAS (twice) WBC. Bob, AYE, says "It is a real pleasure to be active again on 160—there is something about the old 'Top-Band' which one doesn't find on the other bands" to which we say, aye!!!!

OD5LX—Willie, W8GDQ, reports that TEL is "Ready, Willing and Able" with 450 watts and will be on the tests this year—Watch for him!!!! Lebanon will be a rare and nice one to add to your collection. (5A2CV also hopes to be on 160!!)

SWL/"Doug" Powell of GIBRALTAR—starts this season with two very fine SWL logs for November 1 and 15th reporting W1BB



This neat shack belongs to Ed, W4KWC. Ed, as you know, is the new QSL manager for FO8AC.

signals heard 349/120/000 during three test periods each date. His reports are exceptionally factual and complete—last years were made use of in CQ's propagation study analysis. This year's reports promise to be equally fine. He reports a few Gs and DL1FF active thus far. Thanks "Doug". (Tnx W1BB)

Certificates

The Radio Club of Haiti announced its new "HH-20" Award on August 15, 1959. A certificate will be mailed to any amateur who makes contacts with twenty Haitian stations on CW or Phone or any combination of both on any amateur bands. The certificate will be endorsed to show all A-1 or all A-3 contacts.

Applications for the certificate must be submitted to the President, Radio Club of Haiti,

P. O. Box 943, Port-au-Prince, Haiti, accompanied by a list of the twenty stations checked and certified by the secretary of the amateur's local radio club. QSL cards need not be submitted. Following verification of contacts by the Radio Club of Haiti, the certificate will be mailed. One dollar or its equivalent in an amateur's national money is asked to cover the charges of mailing.

President of the Radio Club d'Haiti, Lou Decatrel, HH2LD, says that a minimum readability of 338 for a CW contact and R-3 S-3 for phone is required. Operating ethics, fair play and good sportsmanship should be the goal of all amateurs working for the HH-20 awards.



Terry, VQ5FS, and his XYL. Terry has one of the better SSB signals from Africa. (Txn WVDXC)

The California Award

The Northern California DX Club, Inc. issues this award, which consists of a beautiful certificate, to all licensed radio amateurs located outside the fifty states of the U. S. A. who have QSL's for QSO's with 220 different California stations as follows:

1. Confirmed contacts with any 200 different amateur radio stations located in California and in addition confirmed contacts with 20 different members of NCDXC.

2. All contacts must date since October, 1946, the date the NCDXC was founded as the first DX Club in the world. Any band and type emission may be used.

3. QSL's may be checked and certified to by officials of recognized amateur radio societies and clubs of the world. A list of the 220 stations will be submitted with all applications.

4. The award is free. Please include return postage if cards are sent NCDXC for checking.

5. Send all mail to: The Northern California DX Club, Inc., P. O. Box 75, Oakland, California, U. S. A.

Members of the NCDXC: W6AED, AHZ, ALQ, AM, ATO, BAX, BIP, BUY, BVM, BYB, BYH, CEI, CLS, CTL, DAC, DIX, DUB, EFR, EFV, EJA, GIZ, GPB, GQK, HNX, HOC, IPH, ITH, JHV, JK, KEK, KEV, KG,



The rig, QSL, and location of 11ADW/HV. (Txn NCDXC)

KYT, KXG, LDD, LMZ, LTX, LW, MEK, MHB, MFZ, MLY, NEQ, NHA, NRZ, NZ, NZS, ONZ, OWM, PB, PHF, PQJ, PYH, QDE, RBQ, RCC, RRG, RZS, SC, SXI, TI, TOT, TT, TXA, TXL, UF, UOV, UJ, UPV, UYX, VE, VJW, WB, YUS, ZUI, ZZ, ZZC, K6AQP, AUG, AYA, CWS, EDE, LZI, SSJ.

Contest

Cup winners in the recent Cr7 contest were DJ1BZ Europe, ZS4MG Africa, North America K8AEK, South America PY4KL and Oceania KH6 BXU. The ten highest scorers were CT1PK, K8AEK, K6SXA, DJ1BZ, I1ZCN, ZS4MG, CR6CS, K6DDO, CR6CI and CR6CJ; CR7's LU, BN, IT and FB were the home winners.

Conditions were fairly poor during the CW portion of the DX contest. Some of the better DX on during the contest included FE8AH, JZØHA, CR9AH, FB8XX, OHØ NC, UM8KAB, 7G1A, ST2AR, VS9OM, VK2FR and many more. Well over 100 countries were on. Bob, W3GHD, reports working 39 zones, missing only zone 23. A few fellows reported working JT1AB, so it looks as though all zones were represented.

Well, that's about it. CU agn next month.

73 es DX, Urb, W2DEC

QTH's

CE3LV—Jack Farrance, Casilla 13120, Santiago, Chile.

DU1AJ—Aleli Jose, 1018 Padre, Leoncio Street, Manila, Philippine Island.

HB9QP/CR8 via W4IYC only.

I1ADW/HV via W6AWT.

MP4QAD—Pradhan, Box 71, Doha, Qatar, Near East, Asia.

MP4TAF—BFPO64 Sharjan, Trucial Oman.

OQ5JW—P. O. Box 27, Lupata, Belgian Congo.

VQ8BBB via VQ8AP.

ex VQ8AQ now G3NUF.

VU2ANI/5 via W8PQQ.

VU2NR via WØSZ.

W7WQK/VO2—923 Sqd., A.P.O. 434, New York, New York.

XW8AC—Box 87, Vientiane, Laos.

XZ2BB—Saw Box 449, Rangoon, Burma.

ZD9AK—Charles/op Weather Station, Gough Island, c/o P. M. Capetown, S. Africa.

ZD2JM via K9EAB.

Thanks to W10DW, K2QWN, W4KFC, HB9QP, NCDXC, SCDXC, WGDXC, WVDXC and the OVARA for the above.



ham clinic

Transistor Technology

There are very few electronic circuits in which transistors cannot be used. Of course, you won't find any *vhf* or *uhf* *rf* power amplifier transistors capable of more than a few milliwatts output, but the day will come when semiconductor devices such as the tunnel diode will enable us to do more than we are able to do with power consuming vacuum tubes now—and with less components in the circuitry.

Transistors are used because they occupy little space and require little power. It is true that they are temperature sensitive and require a little more attention, voltage and current-wise, than the average radio tube, but if used properly they are economical and worth considering when designing ham equipment.

To the average ham however, the transistor is a difficult device and he is not inclined to go out of his way to learn more about it. (At least, this is what has been gathered from letters received.)

Unlike the vacuum tube, the transistor can stand a lot of mechanical abuse, but try operating the latter with a few more volts than its operating parameters call for and you'll run into trouble—spelled with a capital "T". On the other hand, you can "pour the juice" to the average vacuum tube and it will still perform well.

So why all this fuss about the transistor? Well, for one thing, unlike the radio tube its characteristics seldom, if ever, change with age. Now you consider the ordinary vacuum tube with its hot cathode, expanding metallic elements, etc., and you'll see that it can live only so long. Not so the transistor. If "fed" and cared for properly, the average transistor will operate on and on without the slightest sign of "giving up the ghost." (I'm sure you have heard about plans for silencing our solar powered satellite transistorized transmitters which could go on transmitting long after all who read this have been "silent keys" for a couple of hundred years!)

Today, transistors *are* practical; especially in many circuits used by the ham-experimenter. But one thing you cannot do (without a lot of hard work) is to substitute a transistor for a tube *without* major circuit changes!

With *Mesa* and *Drift* transistors, 100 *mc* is now considered a *low* frequency! Some tetrode transistors can be used in very simple circuitry to produce a very usable 10 meter receiver—AM or FM. And now with the low noise figures

CHARLES J. SCHAUERS, F7FE/W6QLV

CQ Magazine, 306 West 43rd St., New York 36, N. Y.

being obtained with many transistors, one can design and build a very effective *vhf* converter with few parts in a very small amount of space . . . which *can match* a good tube converter without half "trying."

The best way to become accustomed to using transistors is to obtain a few and make up a few simple circuits. *Raytheon*, *GE*, *CBS*, *Sylvania*, *TI*, *GT* and others are giving such complete information on their semiconductor products that the average ham should have little trouble learning how to use transistors and FAST!

My friend Don Stoner seems to be able to latch on to the latest technical info relative to available transistors, and when you read his column you will find that he manages to find the time to do some very serious experimenting that you can well profit by.

As time goes on you will certainly see that most transistor manufacturers are not standing still but endeavoring to improve transistor performance and reliability. Too, certain manufacturers of ham equipment such as *Hallcrafters* have turned to transistors in some applications with great success.

Yes, transistor technology is improving and ham radio will certainly benefit from it.

Observation

The purpose of any club is to create the *common* ground on which a worthwhile objective is pursued . . . by a *group* united by a *common* interest. (This is *my* definition and not Webster's.)

But how many times have you attended a radio club meeting and came away with a "sour taste in your mouth"! How many times have you wished you could throw a stick of dynamite at some character who gummed up the legislative machinery every time his ego sagged a little and he thought he needed a little special private attention!

Well, you're not alone!

The guy who tries to monopolize the floor and really says nothing drives more young ham aspirants away from club meetings than you can "shake a stick at." He is usually the guy who fails to see another's viewpoint and is the first to duck out of the meeting when committee appointment time rolls around. To those interested in making a go of club activity he is a "sorry mess" and reminds them of the agitators who get paid for such conduct.

What to do? Do as a friend of mine did while president of a thriving radio club—give

he guy the opportunity to produce or embarrass him right out of the club! How? By showing how ineffective he is. Drastic? Perhaps, but maybe necessary.

There will always be people around who just love to take the opposite point of view because it seems to bolster their ego and feed their inferiority complex; which they incidentally try to hide with loud talk or an awful lot of bragging.

Observed: radio clubs can be a lot of fun and much can be accomplished as long as everyone tries to do his best to make it worthwhile to belong to them. But if the character who wants to be "different" is allowed to spoil group effort, point your finger at your club chairman; it is up to him to put the guy right in (privately) or out (publicly). Honest opinion and recommendation should be encouraged—with the good of the entire group in mind.

The Ham Scope Book

I wish to thank all of you who sent in names for my new scope book written exclusively for the ham radio operator. I did carefully consider all suggestions but did not find one (so far) that came near what I considered an appropriate title. Until publication time then, I'll still hold the \$25.00 to pass on to anyone thinking up a better title than THE HAM SCOPE BOOK, which I shall use unless a better one is received. How about helping me out?

Questions

Feedback—"I recently constructed a transmitter from a kit and am experiencing *af* feedback on 10 meters. I can only advance my gain just past '1'. What can you suggest?"

Try the simple measures first. Mike connection good? Using shielded mike cable? First *af* amplifier tube shielded? Modulation transformer secondary leads? Good ground on transmitter proper?

Now then: Insert an *rf* choke ($2\frac{1}{2}$ mh) in series with mike input *right* at connector, bypass output side to ground with a .001 mf ceramic. If you still have feedback try a small (1 mh) *rf* choke right at the microphone (inside the case). If no luck, then make sure that your mike gain control leads are shielded (except the one going directly to ground). Check length of your mike cable, make sure it is not a $\frac{1}{4}$ wavelength long at 10 meters (coiling—reverse coiling one or two loops may help). How about your 110 volt line cord; how long? As a last measure (if no results) try a 68,000 ohm $\frac{1}{4}$ watt resistor in series with the first amplifier tube grid *right* at the grid. You can also try some resistance in series with modulator grids (around 20,000 ohms) and/or plates (around 100 ohms). If no better, try another shield around modulator transformer (aluminum). Above all, make sure you do have a very good low resistance ground. I can think of a few more things you could do, but I'm sure with this info you can clear up your

trouble. Remember however, that so-called "*af* feedback" is sometimes *rf* feedback and most of the measures described above are anti-*rf*.

Scope Amplifier—"Why a push-pull amplifier (vertical) in preference to a well designed single-ended stage in an oscilloscope?"

Higher output voltage for driving the CRT; less hum; reduction of second harmonic distortion and better for frequency compensation (extension of high and low ranges).

6 Meter Beam—"I need a 6 meter beam and I have about \$20.00 to spend. Can you steer me to one worth the money I spend for it?"

There are a number available. How about Hy-gain's 6M5E? Sells for \$18.95; is wide-spaced; weighs 9 pounds and requires only a 9 foot boom. Most any TV rotator will turn it. Nine db forward gain is claimed for it.

Telrex's 6M-3D at \$16.25 is also a real good buy. It requires a 6 foot boom, weighs only 7 pounds and has a claimed gain of 8.8 db.

Another is Gotham's 4 element gamma matched beam at \$16.95.

There is a wide choice and it will be up to you to look at them and choose the one which you feel will do the job for you. When equal gain is claimed the choice resolves itself when the mechanical simplicity is considered.

Note—Everyone knows "Bircher" should be Birtcher. Although this company concentrates on furnishing its fine tube heat shields to industry, hams are in the market for them too. Until their able sales manager told me where to get them, I was lost—in spite of handbook advertisement.

SX25 Improvement—"Where can I get information relative to improving the SX25's 10 meter performance?"

See CQ for February 1949.

PC Burnout—"What causes the parasitic choke in series with the plate of a final 4D32 to burn up? Transmitter is a 32V."

Improper final tuning on 10 meters and/or a high VSWR. Be sure you have sufficient grid drive and properly terminated antenna.

Dial Lights—"Is it true that GE makes a long-life low voltage pilot bulb?"

Yes, write them.

400 Cycle Transformer—"Any way to economically convert a surplus 400 cycle power transformer to 60 cycle service?"

Not that I know of.

Lightweight Receiver—"Can you suggest a receiver weighing less than 30 pounds with built-in power supply which will give me general coverage (BC, SW and Ham bands)? It must have more than 5 tubes."

Hallcrafters S-107 and Gonset's G-43.

Neon I—"I installed a neon fixture in my shack for better light but it sure produces the

receiver noise? What now brown cow?"

Moooooooooo! Try an *Aerovox* type 1N106 interference filter. Costs \$1.03 from *Allied Radio* . . . their stock #70B307, weight 6 oz. Install it right in the fixture—poof goes the noise! Moooooooooo! Incidentally, this can sometimes be used right at a radiating TV set with good results too.

Tube Removal—"Do you advocate removing the af tubes in the TX-1 when operating side-band?"

It all depends upon how long you operate SSB. When on SSB you don't need them; they are very easy to pull out and you do cut down on the heat when you do so. I always unplug the SB 10 when operating CW or AM.

50 Watt Rig—"What do you think of the 50 watt rig described in the ARRL handbook, page 177?"

I like it as a good approach to getting on the air quickly, but I don't like the idea of the 6146 being oscillator and amplifier. Drive it with a 6AG7 or 6CL6, etc., and you'll have a better rig.

Dipoler Angle—Any poles less than 30 feet will require an angle of less than 30°. For those of you who have poles higher than 60 feet, the 30° will work.

NC 300 Vernier—"Anyway to install a vernier on the NC 300 as is found on the NC303?"

Sure. To the lower left of the main tuning dial there is a plug type button which covers the bandswitch shaft removal hole. Remove the button and ream or drill the hole to 1/2" diameter.

A *National* S. B. bushing is cut down to about 3/8" and installed in place with the nut that comes with it.

Cut a neoprene washer to 15/16" in diameter with a 1/4 inch hole drilled in the center. Bevel the outside edge of the washer. Cement the washer to a *National* HR knob which has had the small plastic dial locking tit filed off. Duco cement does a fine job.

Then cut a 1/4" shaft 1 1/4" long and drill a small hole through its body close to one end for a cotter pin which will prevent the shaft from being pulled out inadvertently. Mount the knob on the shaft and pass the latter through the center hole of the bushing. Use a little oil for lubrication on the shaft.

You can now use the main dial for quick frequency excursions or with an insignificant amount of pressure on the HR knob, you can enjoy slow vernier tuning, say for SSB signals.

Still More on the SB10—"I followed your modification data okeh on the SB10 and it works fine according to on-the-air reports but I still seem to have a little difficult maintaing carrier null. Anything new?"

Yes. Insert a 10 watt 1500 ohm resistor in series with the B plus feeding the balanced

modulators. This will help or completely eliminate your drift.

Explosion—"While mobiling through California I came upon a construction area near which a sign was posted reading: 'Do not operate mobile radio transmitting equipment in this area! Explosion danger!' How about this?"

Electric blasting caps can bet set off by rf . . . especially in the higher frequency (10 meters up) bands. Another thing, do not operate your rig in or near a gasoline station or near a gasoline truck.

Transistor Modulation—"How can a transistor rf amplifier be modulated practically?"

By series transformer coupling in either the base, emitter or collector.

Book Reviews

"Microminiaturization of Electronic Assemblies" is a book published by the Hayden Book Co. Inc. and edited by Eleanor F. Horsey. It is organized into six sections which are titled, Techniques, Semiconductors, Components, Circuits, Missile Systems and Microelectronics in Industry. Actually, the book consists of a compilation of papers which have been presented before professional societies by experts in their particular fields.

For those seriously interested in what can be done to compress operational circuitry into real small space, this book is ideal. It is not recommended for the average ham who is usually content with something he can hold in both hands.

To me, chapter 2 is worth the price of the book alone. It covers "Two-Dimensional Transistor Packaging." This is interesting. Chapter 3 isn't anything to sneeze at either because it covers antenna miniaturization.

\$11.00 will get you the book containing 278 pages.

Now another book, more to the liking of the amateur radio operator—"Basic Electronic Test Procedures" by our old friend, Rufus P. Turner. I still wonder how he does it! Goodness, can he write! This new one has 18 chapters covering everything from the use of meters to industrial electronic measurements. No hard to understand diagrams in this one! No sir, he obtained the services of an artist who can draw! All I can say in one breath on this one, it is G-r-e-a-t! His easy flowing style makes it all easy to understand. The book is \$6.50 and worth every cent. The ham who wants to learn how to test electronically will find this is just what he has been looking for. It is published by Rinehart & Co. Inc.

To order either book mentioned here send, your check or money order to the *Radio Bookshop*, 1379 East 15th St., Brooklyn 30, N. Y.

Thirty

Thank you for reading the column.

73 and 75, Chuck


Novice

The WWV Story, Part 2

Last month we discussed radio stations WWV and WWVH and how they provided accurate frequencies, both audio and *rf*, for timing and calibrating equipment. Let's see how these signal sources can be used in the novice shack.

The simplest and most direct way of using these calibration signals is for check points to check the accuracy of your receiver dial. If WWV is received close to the 10 *mc* mark at the high end of the dial, but is off at the 5 *mc* point, your receiver is not tracking properly. There are enough WWV transmissions to check each band on an amateur communications receiver and they may be used for actual alignment of the "front end". Even though you may not be able to hear WWV on 20 or 25 *mc* you can beat a *vfo* or grid dipper against the 5 *mc* signal and then pick up the harmonics on your receiver. By the same token, you can beat the dipper with WWV on 10 *mc* using the 5th harmonic (the dipper frequency would be 2 *mc*) and obtain 2 *mc* check points over the entire range of the receiver.

Figure 1 illustrates a method of comparing the frequency of tunable signal sources such as signal generators, dippers, and *vfo*'s with the WWV standard. The same method is used when comparing crystals which are submultiples of WWV, such as 100 and 1000 *kc* calibration sources. The signal to be calibrated is loosely coupled by radiation or capacity coupling to the communications receiver, which is tuned to one of the WWV channels (see Jan. Novice Col.). The frequency of the source is then varied until a beat note between one of its harmonics and the WWV carrier is heard in the speaker. When the local signal is adjusted to produce exact zero beat, its frequencies is equal to that of WWV or is an exact submultiple of it. If you are not sure what submultiple you are on, tune the various harmonics on the receiver and find the lowest frequency where the signal source is heard. That's your fundamental frequency.

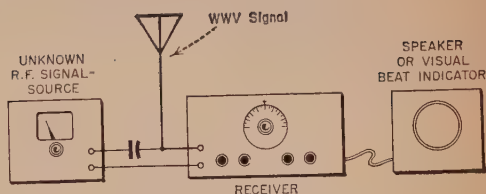

CALIBRATION OF L.F. SIGNAL SOURCE
Fig. 1.


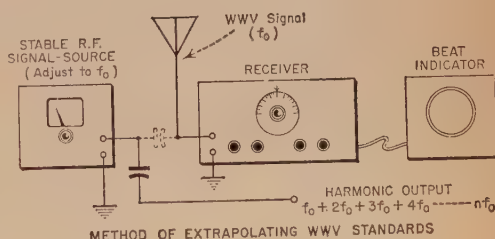


Fig. 2.

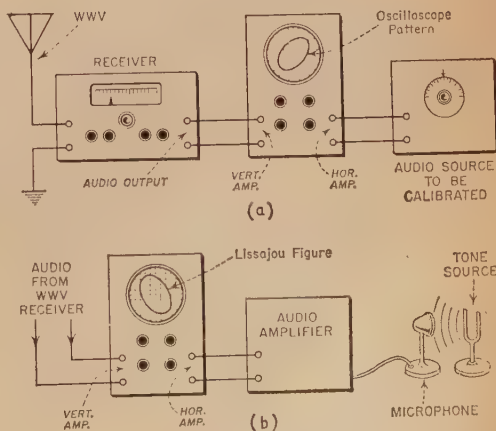

METHODS OF AUDIO COMPARISON

Fig. 3.

The system just described will check frequencies lower or equal to the WWV transmission. How would you like to calibrate your two meter receiver against WWV? You can do it with the test setup shown in fig. 2. In this case the stable signal source would be a high level (several volts) 1 mc crystal oscillator or signal generator. This unit is beat with WWV on any of its receivable frequencies, and then coupled tightly to the vhf equipment. You will then be able to receive 1 mc marker points across the entire band!

Audio equipment, as well as musical instruments may be referred to the 440 and 600 cycles tones broadcast by WWV using the layout shown in fig. 3. The output of the WWV receiver is coupled to the vertical amplifier on an oscilloscope, while the device to be calibrated is coupled to the horizontal input. When the frequency of the local source is adjusted to equal the audio transmitted by WWV, a stationary circle or ellipse will appear on the cathode ray tube. Other multiples or submultiples may be identified by using Lissajou figures (see ARRL hbk.).

To calibrate the musical pitch produced by non-electronic sources, the equipment shown in drawing (b) of fig. 3 is required. Since the source does not produce an electrical audio output, a microphone and amplifier must be used to convert the audio into electrical signals. As before, a single pattern will indicate the two signals are the same frequency. However, since the source may not produce a sine wave, the oscilloscope pattern may not be a perfect circle, but may be considerably distorted. Using this system, musical instruments may be tuned exactly. If you have a "trained ear" you can replace the oscilloscope with your head! Listen to the instrument and the WWV tone at the same time. You will hear a zero beat occur when the two devices are on the same frequency. Again, thanks to the Aerovox "Research Worker" for supplying information for this article.

Red Face Dept.

Some time ago I mentioned that Novices were allowed to operate in Canada. Several readers, among them Jim Thorpe, VE7AIK, have corrected me. He quotes from the "Radio Amateur Licensing Handbook", by Jim Kitcein, Regional Supervising Radio Inspector for the Dept. of Transport, Vancouver, Canada. According to Jim "It is a requirement that the American visitor must hold a qualification equal to or higher than the minimum Canadian certification, and such being the case, the holders of American Novice and Technician qualifications are *not eligible* for permits to operate mobile stations while visiting Canada". Thanks for the correction Jim and Jim. My humble apologies if this "good" has inconvenienced anyone.

Trick of the Month

W. Murray Banks, VE1GA, Kingston, Nova

Scotia, adds a trick of his own to my procedure for tuning a transmitter described in an earlier Novice Column. He suggests "before applying plate voltage to the *pa*, it is expected that you have your frequency spotted on the receiver—rotate the tune capacitor for maximum "S" meter reading on the receiver. If no meter is available, the ear will get you close enough. You can then apply plate voltage to the P.A. without making a mad dash for the tune capacitor as the *pa* tank will be in resonance, or nearly so." Try VE1GA's trick fellows, it really works. No excuse for those pinned plate current meters!

Who's DX?

How would you like to work DL4 land? PFC Mark E. Lawyer writes to say that the Armored Radio Sports Club listens very carefully on 40 and 15 meters for novices. Mark indicates that he would like to hear from novices and possibly arrange some skeds. If interested, drop Mark a line: PFC Mark E. Lawyer, RA 13630115, Co. C 2nd Med Tk. Bn 13th Cav., APO 39, New York, N. Y.

From the other end of the world we hear from a KR6 novice. Tom forgot to include his last name or QTH, but did say his call was KR6ZT, and KR6Z stations are all novices. He has heard many K's and WV's but so far has been unable to contact any stateside novices, with his rocks on 21.108, .155, and .242, with .108 favored. Tom runs a homebrew 25 watts to a 5881 final, an SX-28, and a rooftop dipole. Tom would like skeds by airmail. I believe a letter addressed to KR6ZT, care of Okinawa Amateur Radio Club, P. O. Box 739, APO 331, San Francisco, Calif., will reach him okeh.

Mark Lawyer, mentioned earlier, reports hearing the following stations in DL4 land: KN3GCS, ILF, IWK, KN4BRX, WP4ARR, KN5RNO, VQR, KN8MXI, PTM, KN9PNV, KNØSFF, on 15 meters and WV6FCO, KN8OCL, and KN9RIY, on the 40 meter novice band. Thanks for the report, Mark.

The band was good during October for Tima Popovic, YU1-RS-357, Banat Novo Selo, Yugoslavia, and he reports hearing the following stations: Oct. 24, 1725—2035 GMT: KN1JIR, JUG, JXI, JYI, KBV, KCA, KDO, KML, KNQ, KVC, LBM, LLR, LVA, LWH, LXM, MJT, MKF, WV2CCU, DSE, EAQ, EHM, FBV, FBV, FHU, FMS, FYE, GFZ, GQW, GXM, HEI, HFT, HGL, HUI, HVQ, IAF, IJA, IKR, ITE, KN3HJK, HLB, ILF, IPB, JGL/3, JGU, JHG, JMP, JTP, KAU, KAW, SPB/3, WP4ARZ, KN4DGH, FTV, FWD, FWJ, HNR, IZO, JPV, JUK, JYP, KAU/4, KEU, KWQ, LHM, LRL, LXP, ORD, PFB, KN5WHW, WSJ, YAE, KN7JTJ, KN8NHC, OCK, ODK, OLU, QBW, QDT, QEX, QFA, RHK, KN9QJT, RMJ, ROD, RXR, RXV, SOZ, SRK, TUS, TZS, UCE, UFQ, KNØVMZ, VSK/1 Oct. 25, 1618—1920 GMT: KN1JAI, JGM, JJJ, KSG, LWX, LXB, WV2DRK, DTF, DXA, ELP, FJW, FPV, FTS, FWG, GRE, HJR, HRP, HVR, IGW, PQW,

KN3GYD, HLX, HPU, HTH, IWK, JGL, JGY, JIV, JLI, JTV, JZV, KN4EOS, FTC, FYN, HAO, HYN, ICH, ISV, KBZ, MOW, MPJ, OLK, ORJ, ORO, KN8NTE, OLB, OSS, PCH, POU, PWJ, KN9QJT, QMT, SMA/4, TPQ. Thanks once again, Tima, for your extensive list of calls heard.

Help Wanted

W6OZ, 255 Mantua Road, Pacific, Palisades, Calif., writes to say he generates code practice on 7199.5 at random times between 9 and 15 wpm for the primary benefit of novices. Dick also broadcasts ARRL bulletins on that frequency at slow speed, and usually has the rig going most of each weekend. Comments and signal strength reports will be appreciated.

The Panama City Amateur Radio Club of Panama City, Florida holds code classes and give code tests every Monday evening at 7:30 PM except on meeting nites, at which time it follows the 7:30 meeting. The club house is at 7th and Magnolia Ave. For more information call or write Don MacDonald, K4FQQ, 1912 Arthur Ave., Panama City, Fla.

The following persons have taken the time to write and ask for a helping hand on their examinations. Can you spare the time to help them out?

W1—Ralph McClintock (15), 44 Parkway Crescent, Milton 82, Mass. Phone CU 6-2575.

W5—Leighton Kelly, (13), 1207 Barshall Lane, Austin 3, Texas.

W9—Jim Breszke, 417 East Main, Sun Prairie, Wisconsin.



Bob Secor (left), WV6JCJ, 6242 Rockwell St., Oakland 18, Calif., introduces us to the other ham members of his family. In the middle is brother Terry (K6VSN), and on the right is Dad, K6VSO. The boys use a DX-100 and SX-101.

Letters

Jim Chandler, KN9TZN, 157 N. 6th St., Elkhart, Indiana, kicks things off this month with his letter. He has worked 37 states (conf) plus OK1, G5, WP4, VE6 and 7 with his DX-40 and SX-100 since Aug. 20th. Jim wishes to thank W9AKJ, his XYL, and W9MLE for their assistance with the novice license.

Jim, K5BNK, 701 W. Locust, Durant, Okla., writes to tell us about his ham family. Besides himself these are Jos, K5SLP, Fran, KN5TWB, and Tom, K5BAU. They all use a tri-bander and stick pretty close to the novice CW band. Jim will sked anyone needing Okla. for WAS.

Bud Lafferty, ex-KG1CK, got KNØVPP, Roger, on the air with his old Greenland equipment and reports that in three weeks he has worked 35 states, including Alaska. By the way, Bud is now in Adana, Turkey, and should be reporting on novices heard, soon.

Bob Hillman, VE7BBM, 2125 Bridgeman Ave., North Vancouver, B.C. Canada, writes to advise us he is on the lookout for novices and has 27 states confirmed with his DX-20 and Harvey Wells R9A receiver. Bob is 16 and in the 11th grade. He will sked for any reason. Bob's pet peeve is the novice who thinks his shack is surrounded by icebergs and such (well isn't it—Bob?).

Phil Coley, KN4MPE, 2006 Twain Rd., Greensboro, N. C. is racking up the dex with VE's, WP's, TI2, YV5, KZ5, G3, DL1, DJ3, I1, OE1, OZ's, LU6 es SM7 under his dx belt, plus the rare one UP2KCD that got away. Phil would like skeds with Idaho, Vt., Del., Ariz., and KH6.

Dave Clark, KN8PJP, 502 Carroll St., Waverly, Ohio, would like to work Vt., N.H., Del., Alaska, Hawaii, and the 7's for his WAS. He runs a Knight Kit and SX-28 to a 40 meter dipole and will sked for any reason.

Harold Richard, KN7HOF, Box 416, Springerville, brings us up to date on Arizona happenings. He has been on for 5 months now, and has a WAS of 48/48 but needs Nev. and Vermont. Harold uses a Viking Adventurer, HQ129-X and 2 element beam.


A similar writer, Sanford Hutson, K5QHS, Stuttgart, Ark., advises us that he finally made WAS and is well on the way to DXCC with 50 countries, and is still using the old gear with a TA-33 tri-bander. New DX includes KS4, UA1, UA4, and OQØ, with VP5 and SU1MS cards in the mail (we hope).

Herb Willcox, KN1LXA, 1200 Mass. Avenue, Cambridge, Mass. has a neat trick. He suggests that when trying to copy a cw station through phone QRM, turn off the bfo and let the two stations beat with each other. Says it reduces the racket greatly.

Merrill F. Green, KN3JDF, 7718 Wilson Ave., Parkville 14, Md., is an ole timer (38-HI) and is neck-and-neck with WAS but needs KH6 land and Vt. to get the wallpaper. He uses a Viking Ranger, SX-28A and dipoles on the

[Continued on page 106]

New Amateur Equipment



GP 27-11

Master Mobile CB Ground Plane Antenna

For you lads on the Citizens Band (11 meters), Master Mobile has a nifty vertical ground plane called the model GP 27-11. This unit is constructed of heavy wall special alloy aluminum tubing for the whip and support pipe. It has a swivel-type antenna base mount to permit installation on either a flat or a peaked roof. The radials are constructed of heavy tinned copper braid. As to the specs, Master Mobile claims a VSWR of 1:5:1 at resonance. The GP 27-11 is furnished complete with all hardware, insulators, guy hooks, screws and 50 feet of RG 58/U cable terminated with a Motorola-Type auto radio connector. For a great preponderance of detailed information, we invite you to gnarl E on page 126. Get gnarling, please.

Hammarlund HQ-180

Hammarlund announces their latest amateur communications receiver, the HQ-180. Designed with the SSB operator in mind, the HQ-180 offers many features particularly desirable for this mode of operation. The new receiver is an 18-tube super-heterodyne type which has triple conversion from 7.85 to 30.0 mc. Beside an effective noise limiter, the HQ-180 offers the operator a choice, or combination of Slot Filter, selectable sideband, tuned if, bandspread and a separate linear detector for tuning the desired SSB signal. A high-frequency crystal filter is employed at 3035 kc to improve selectivity and shape factor of the first if. The slot filter is adjustable plus/minus 5 kc over the passband for up to 60 db attenuation. Price for the cabinet model, \$429.00. If it's more data you seek, merely obliterate D on page 126 and we'll see that you're in the know.



Heath FM Test Oscillator

The Model FMO-1 is Heath's latest development in the test equipment department. It provides all the test signals and sweep frequencies required for accurate alignment and troubleshooting of *rf*, *if* and detector sections for *fm* tuners and receivers. Convenient switch selection of fixed frequencies of 90, 100 and 107 mc are provided for tracking *rf* "Front Ends" and checking dial alignment. A 400 cycle tone is available to modulate the *rf* signal when desired. The 10.7 mc sweep oscillator in the FMO-1 features variable sweep width from 200 kc to well over 1 mc for *if* alignment. For more detailed dope, we suggest you gash B on page 126 and all the data is yours.

Vibro-Keyer

The Vibroplex Company has a real cool gadget for those amateurs that need the mechanical end of an electronic keyer. The Vibro-Keyer is constructed in line with the high-quality workmanship for which Vibroplex has long been famous. The unit has large, non-corroding contacts, heavy beige colored base, colorful red finger and thumb pieces, and smooth, easy operating trunion lever. It is, naturally, adjustable to suit any amateur's taste. The Price? Only \$15.95. For more information, encircle C on page 126.



New GLOBE CB-100

Want to operate Citizens Band? Globe Electronics' new Model CB-100 Citizens Broadcaster is an ideal way to do the job painlessly and effectively. The CB-100 is a crystal controlled, 3 channel selectable transmitter and receiver weighing only 13 lbs. Two models are available. Both operate on 115 vac; one also operates on 6 vdc; the other on 12 vdc. See! It's ideal for mobile, too. Want more data? Merely synthesize A on page 126 and we'll get the info out to you Poste Haste.



RTTY

Byron H. Kretzman, KØWMR

108 W. Teresa Drive
West St. Paul, Minn.

This month's tidy tidbit of teleprinter technology reaches you through the courtesy of W6AEE, publisher of the RTTY bulletin of the RTTY Society of Southern California, Inc. It comes from the September issue of RTTY and from that most prolific of RTTYers who build, Phil Catona, W2JAV, designer of the W2JAV converter which was described in the April 1958 issue of *CQ*.

If you have a polar relay in the output of your terminal unit, or converter, you undoubtedly have had some difficulty with the noise generated by the arcing contacts in your local loop, particularly when you are digging way down for that weak ZL or VK. Well, you *could* use a vacuum tube keyer, but why not do it the easy way, the W2JAV way? Figure 1 shows the schematic of Phil's simple transistorized electronic keyer. With the polar relay plugged into J-1, only a small base current is keyed to make the RCA 2N270 collector current operate the Model 26. With 35-volts applied, the 1000 ohm pot is adjusted for the loop current that gives the best range. This should be in the order of 20 to 25 *ma* (Phil has gotten an 80-point range from his). The result: no contact noise to be picked up by your super-sniffer receiver. Neat, huh?

WØBP Memorial Station

Ever since the untimely passing of Boyd



1959 Chicago RTTY Meeting.
The Candid Camera at the Evening Banquet.

Phelps, WØBP, (*CQ*, Aug. '59, pg 54; *QST*, Sept. '59, pg 89) all of us have acutely felt the void on all RTTY frequencies, from 2 to 80 meters, left by this most active and liked RTTYer of all time. It therefore was unanimous among the Minneapolis-St. Paul club (RATS) that not just a memorial to BeeP should be erected, but an *active* memorial in the form of a club radio station would be established. This station, of course, would fling the call "WØBP" not just across the nation, but to the far corners of the earth, reminding all that copy of the man who gave RTTY life and purpose.

A special committee was appointed, consisting of Harold T'Kach WØLFI, Bruce Meyer WØHZR, Harry Nielson WØKKP, Bob Fincke KØAKG, Bob Wesslund WØAUS and Ed Johnson, BeeP's son-in-law. As Harold was in the Air Force Reserve it was natural that the investigation for a site began here. A happy set of circumstances; an unused old military radio station site complete with building and towers, and a most co-operative Base Commander, make the picture real bright.

So here we are: The WØBP Memorial Station will be a combined RATS-AF MARS

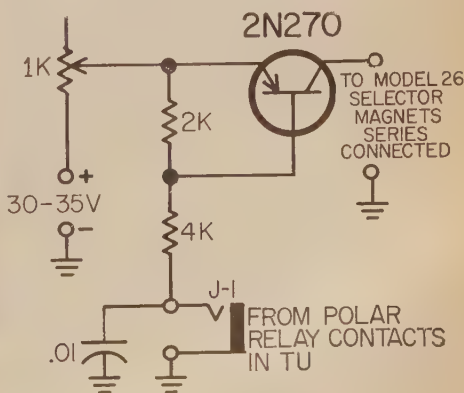


Fig. 1—W2JAV Transistorized Electronic Keyer for Model 26 Selector Magnets.

operation, located on Snelling Air Force Station just outside of Wold-Chamberlain (Minneapolis) International Airport. Five steel guyed towers will support all kinds of flat-top antennas and another tower, similar to a windmill tower, will support a multiband rotatable beam. There will be no lack of equipment. Besides equipment available through MARS, Mrs. Phelps has very kindly offered any or all of BeeP's collection of machines, receivers, and transmitters. The Base Commander, Col. Wood, is especially to be commended for his whole-hearted cooperation in providing such excellent facilities for the amateur radio activity.

Letters of Interest

W6VVF de XE1BI—"Thanks very much for your letter asking by your QSL confirming QSO between XEØBP and your station, W6VVF. That morning—I was present when BeeP was pounding the machine; as BeeP all the time was operating RTTY very few places were left without an RTTY QSO: He made almost all calling zones: eight, Canada, Chile (for the first CE - XE in RTTY) and Mexico (for the first XE1 - XEØ) also he became the very first American tourist to operate RTTY in Mexico (first XEØ in RTTY).

That morning, I had prepared a tour around the city; first going to a place named Paso de Cortes (the pass that was used by the Spanish conquerors of Mexico). Adolph, WØITQ, and BeeP really enjoyed that trip and all the time this last fellow made jokes.

By the night, I took the log of BeeP and made the cards so BeeP could take the log with him back to the States. It was a Mexican log all written in Spanish so as to make more 'realistic' the operation of XEØBP. I have sent the cards, almost all, but I have a few: BeeP, checking the QSL's saw the addresses were not right in some of them (I had them from the RTTY and Call Books) so I have been doing is to write postal cards to each one asking for confirmation of addresses.

I was very fortunate to have the chance to have living in my house to that great two fellows, Adolph and BeeP. While they lived I enjoyed very much each new QSO of them; each time BeeP made a new State or country, he drank (sometimes with me or my wife) a cup of a typical drink named 'tequila'; he said that it tasted good so he wanted to make WAS!

I have checked against the cards I have yet with me, and as long as I can see, you are the latest QSO in life, of BeeP. That night, I remember, conditions were very poor and don't know if BeeP could make one more.

With best 73's,

Eliezer Erosa Irabien, XE1BI"

Thank you, Nick, for passing along Erosa's letter.

Bill Brennan G3CQE—"I am writing to thank you for your fine gesture in donating the RTTY Handbooks to BARTG over here. They have been received by Doc G2UK and he asked me to thank you. Perhaps you can realize the great value these are to us—in your editorial you mention you fellas were in the same position there as we found ourselves here. All RTTY info is in extremely short supply. I have my own copy of the RTTY Handbook but since Jim VE7KX sent it over to me it has done several thousands of miles backwards and forwards along the country. It is now much thumbed but I wouldn't part with it for a three el beam! Funny, I could swear I know the book backwards but each time I let it outa my sight darn if I don't need to refer to it! Anyway Byron take it from me your copies are gonna be very busy for a long time to come. We did get some further copies (other than mine) but Doc had to loan em out with almost threats of violence if they weren't returned pronto for the next fellow!

I understand from a letter from Jim today that you would like some mags over here. Just let me know which ones and they are yours. He also says that you would like to be kept up to date with RTTY happenings over here. This I am willing to do if you would like me to. I don't mind a spot of typing now and then. I don't know how much you know of the past history of RTTY over here. BARTG was formed by Doc G2UK and myself (just the two) about May this year. Course it was all started by Jim VE7KX. I wonder if you know why? Personally I owe a great debt to both Jim and Merrill W6AEE for copies of the RTTY bulletin and now from Merrill a Model 26 is on the way. What a grand lot of boys. I know you have done a lot for RTTY through CQ Byron. Sorry to say that I just don't see CQ here. I have seen a few copies of it but it is rather expensive for us blokes—so is QST, mind! Our rate of dollar exchange is not favourable to us buying things from the USA as you probably know. What I have seen of CQ I do like very much. Particularly the constructional articles. When a few of my domestic commitments are clear I shall take CQ.

Now about RTTY over here. We have about 26 printers all of the Type 3 Creed range. I have sent the details over to both Jim and Merrill. There are keyboard differences but if you need the details write me again and I'll send you some more info. At the moment only Doc and myself are actually active on RTTY here. Doc is only on 3.5 mc though he could get hf if he chose to. I am active on 10-metres through 80. So far I have only worked Jim VE7KX on 21090. Have had a tryout with Eric VK3KF but as you know he is minus his beam and I was only able to print a few RYs from him. We keep trying. I have exchanged letters with ZL1WB and we are look-

ing for each other. Have not yet worked a W in either 15 or 20! There has been very low activity from you boys there recently. I heard W3CRO testing RTTY on 14340 a couple of weeks ago but he didn't have his receiver turned up I guess. I printed him fine, tho! On the 10th of October I heard several W's on 1440—tried calling 'em but nothing doing—though I had just been given 589 by two W's in 7030 (CW). Anyway, I heard K1MJZ calling RTTY and called him after each CQ praying that no one else would try to go back to him. They didn't and we made it! Still don't know if he believes it or not. Haven't heard from him yet. This last weekend I again listened and heard W1FGL working W4ZGR, both 57/89. Printed several yards of perfect (and I mean perfect) copy from them but they went QRT and didn't seem to hear me calling. Have written to W4ZGR. I had heard him the previous weekend too, this at around 0100-0300 GMT. WØFQY is a friend of mine and we hooked up on 15 meters the other day and he got some printing from me but he is only fixed up to transmit RTTY on the *lf* bands, hi. Have now had three RTTY QSO's with Jim up there though. Doc and I work each other very well on 3.5 *mc*. We only live 30 miles from each other and keep in constant touch. We are expecting to have several more of the G RTTY boys on the air in the next few weeks so there will be more to tell soon. So far Doc and I are pretty lonely! Have got ZC4SR interested in RTTY and he is going to try to borrow a printer if he can get the dope on FSK and a TU and that dope is now on its way out to him. Perhaps that will put a nice easy Asia on the RTTY map!! Sadly miss Old BeeP and proudly keep his printing of my AFSK RTTY (from mag tape in February this year) on the wall of the shack. Hope you will arrange the transmission of that bully-tin on 15 too. I am really interested only in DX RTTY so here is hoping for more activity from you boys on *hf*. Would be delighted to keep skeds with anyone. Rig here is 140 watts and the antenna is a V-beam. Countries score has stuck at 233 for three months now—since I got going strong on RTTY building! See you on the air during the RTTY SS. Let me know pse if I can give you any more info. Thanks from all of us again Byron."

FB Bill! Thank you for all the dope. Hope to work you on 14,340 some time.

Bud Schultz W6CG—"Sure has been a long time since I traded any repatee with you. My hours on RTTY seem to be limited to the mornings and week ends. By the time I arrive home at night the RTTY gang has folded up. Don't let this little letter surprise you, OM. I will explain: Am in receipt of a long long letter from Bill G3CQE and from it I will make a quote which is self-explanatory. 'Jim asked me to let Byron know how things were

going over here. I wrote to him this morning but this QSO with you folks made that letter out of date. Wonder if you will pass the info about this QSO on to him?' "

The QSO he refers to is our first, completed on October 20th. I heard rumors that ET2US was on RTTY around 21,015 so I was giving the band a look-see when I ran across some fine FSK signing G3CQE. At the time Bill was in QSO with VE7KX so I stood around and bided my time. When my turn came I turned on the FSK with my fingers crossed but Bill was able to make nice solid copy.

Since the 20th we have had a total of four good solid RTTY contacts with him from here.

Actually, we are not claiming anything but are just plain happy to finally have completed WAC on RTTY. I sent my WAC-RTTY cards to Budlong for consideration by the IARU; however, I understand they don't recognize RTTY for this award so I don't have any hopes.

On Saturday after the nice QXSO with G3CQE I managed to have nice solid F-1 contacts with KH6BSH, ZL1WB, and VK3KF so I firmly believe the 15-meter band is open for the season. hi. Eric suggests we rename the RTTY SS or dedicate some activity to the memory of the 'ole BeePer to keep his name alive. Think it is a swell idea, and told him I would pass the word around."

Thanks for the news, Bud. See you on 14,340 some time.

52.6 MC Comments

Last month we talked about the availability of commercial surplus FM mobile radio equipment. Our promotion, of course, was for a real good AFSK autostart RTTY network on 52.6 *mc*. Well, we now have one going in the Twin Cities, and perhaps you might be interested in some of our specific experiences.

First of all, I would like to say a very kind word for the gamma matched ground plane antenna of K4PRL, described on page 55 of the July '59 issue of *CQ*. I used a whip for the top part, as did Willie, and I measured a *vswr* of less than 1.25 to 1 without any trouble. The aluminum ground plane wires I pulled tight, at a 45-degree angle, with nylon lacing twine. These also serve as guys, as it gets pretty breezy in these parts.

We, too, have a Channel 2 TV station here, which causes a few problems. The gamma matched ground plane mentioned above helps, of course. A simple series tuned trap across the coax input I've found successful, and others have used the parallel tuned trap of W8INQ (pg 71, May '58 *CQ*). A real rough case requires the filter of WØHKF as described in the July 1956 issue of *CQ*.

See you all in two months.

73, Byron, W2JTP, KØWMR

SURPLUS

by **KENNETH B. GRAYSON, W2HDF**

Care of CQ 300 West 43rd Street, N. Y. C. 36, N. Y.

The column last month, covered the general area of what's available as well as desirable in surplus. We originally planned, and actually did, convert the RAO receiver, for this month, if you want to call it conversion. Like many receivers, the RAO is ready to go just as you buy it, since it operates on 115 volts 60 cycles. The RAO covers 540 to 30 *mc* and has a 455 *kc* *if*, being a superheterodyne. The original receiver, from which the RAO was copied was the NC-100 made by National. Like all of their equipment, this was a fine set. Only one problem, so we've been told, and that was oscillator radiation. This was overcome by adding an extra *rf* stage and good shielding. Oscillator radiation was quite a problem during war-time, since the U-boats used direction finders to home in on the unsuspecting ship using a poor receiver.

OK then, what's to convert? Actually, nothing, in this case. But there is a lot of things NOT to convert and this set is a good example. First, as with any surplus equipment, try to clean up the dirt which has probably accumulated. Start on the inside and blow or wipe dust and corrosion off, scraping if necessary. Q-tips (from the medicine chest) and pipe cleaners come in handy for close corners and between condenser plates. Wipe any wires down and if necessary remove wax from condensers with a screwdriver or knife and clean up with alcohol (rubbing alcohol is fine). This also applies to any excess rosin from solder. Now pull the tubes out, one at a time and dust them off, especially around the grid caps on top, if any. Switch contacts should not be spread apart for cleaning, but instead use a good contact cleaner, such as General Cement DE-OX-ID, available at your local dealer. For cleaning black crackle, we found out a long time ago, that a little Carbona Soapless Lather,

and some carbon-tet, mixed half and half and brushed on with a paint brush works wonders. Work a small area at a time, and wipe dry after a couple of minutes with a soft rag or towel.

But now, what not to do to this type of set. Frankly, we'd never think of this approach if we hadn't gotten a couple of requests for help from people who made THE mistake. Like many sets of its day, the RAO makes use of double ended tubes such as the 6L7, 6K7 and 6J7. In these tubes the grid is brought out through the top, and the grid to plate capacity is very low. The sensitivity of these sets, when properly aligned (See Alignment Techniques, CQ, May 59) is good, although it drops off somewhat at the high end of the range. In order to improve the gain, the temptation is to rewire the socket for single ended tubes, and then substitute a high transconductance pentode in place of the original tube. (Sometimes the change is to the seven or nine pin miniature.) As a result, the set usually oscillates or overloads easily, and we get a nasty letter practically pleading for help with tears between each line.

Oscillations can occur in a circuit only when two conditions are met. They are, sufficient feedback from plate to grid so the tube can supply its own signal, and that the signal feedback is in phase with the signal which is at the grid. This can happen easily at certain frequencies in any amplifier. By rewiring the grid near the plate we could easily couple enough of a signal for this to occur. The solution is simple. Leave the original design alone.

Suppose we don't have oscillations. Why should the set overload (distort) on even weak signals. The solution to this is actually twofold. First, the higher transconductance tubes usually cut off with less voltage on the grid,

even a weak signal has been amplified quite a bit after it has passed through the *if* stages. The limiting, very similar to the FM limiter, is the *if*. The second reason is the *avc* system. When a weak signal generates a couple of volts *avc*. Sometimes even noise will develop enough *avc* to cut off a tube. It also happens that remote cut off tubes are replaced by high conductance sharp cut-off types, which give similar problems.

This info also applies to some models of the BC-312, 342 and 348, as well as many of the earlier ham receivers.

Keeping in mind the *if* of the receiver you have, quite a bit of improvement can be obtained by a Q-multiplier. We tried the Central Multiplier in the RAO and it worked quite well, just following instructions.

Stopped over to see K2LGS the other night and he showed me the BC-603 he converted. One of the neatest and cleanest conversions I have ever seen. He used a commercially available power supply which replaces the dynamotor, but we pointed out the safety factor about transformerless supplies. Gus agreed to use a small isolation type 50 watt transformer which made us breathe a little easier, since it was as nice as Gus is what makes up the CQ surplus hounds, and we hate to lose them.

Oops Department

Our draftsman labeled the oscillator tube incorrectly in the BC-733 conversioning October 1959. The correct tube is a 6AU6 or 6AU6 (depending on the filament voltage you want). The drawing is OK, but the label is wrong.

Mail

Many requests are received each month regarding conversions and where to find them. Invariably we answer each and every reply. The exceptions are the few letters that arrive without return addresses. We may not be as prompt as we would like to be, but the letters do get answered, usually by post card. Many requests come in regarding conversions that are not always available. In cases like these we pass the word via the handbook requests and apparently have been very successful to date. This month I Flitcraft, 41½ East Washington St., Chagrin Falls, Ohio is looking for the handbook for the BC-156/ARR-16B. John Farnham of 4736 Violet Avenue, Sarasota, Florida and L. E. Etheridge, Box 254, Reprise, California are both looking for the BC-433 direction finder handbooks. Dick Fowler, W8FEM, P.O. Box 311, Mt. Vernon, Ohio needs the BC-778/SCR-718 manual and conversion. John Cooper in Petal, Mississippi needs the handbook for the BC-797. E. B. McDell, Carmel, New York needs the BC-1066A instruction book. Harvey Rock, 1865 77 St., Brooklyn 14, N.Y. needs information on the BC-728.

Jonas R. Savage, Rt. 2, Box 900, Vacaville,

California needs the ALA-10/ID-274 book. Mike Arnold, W3YDF, Rich Hill Road, RD-1, Cheswick, Pa. needs the BC-684 manual. In Roseboro, N. C., Bill Phillips, Box 42, needs the SCR-300 handi-talkie instruction book. H. W. Lingenfelter, 21352 Kenwood Avenue, Rocky River, Ohio needs the BC-669 book. From over in Sweden, N. O. Theve, SM5PY, Lidgaten 18, Solna, Sweden, needs any conversion information from anyone on the ART-13. C. T. Chadwick, 2450 Teller Street, Denver, Colorado has a couple of GP-7 aircraft transmitters and needs conversion information and handbooks.

Earl M. Coit, 1110 Norwood Street, Kent, Ohio wants the T-9/APQ-2 manual. From France, B. Cical, 8 rue A. Fournier, Chaville (S. et O.) France wants data on the BC-470D. Merle S. McBlain, 7622 Highway 128, Healdsburg, California is looking for the TS-34A and BC-779B manual. Another GP-7 manual is needed by Howard Magill, P.O. Box 506, Sutherlin, Oregon. William Border, 5883 Rhode Island Avenue, Cincinnati 37, Ohio wants handbooks covering the APR-4, TS-92, APX-6 and the BC-925. Thomas Mlynarski, 7610 Pierson Avenue, Detroit 28, Michigan wants the TS-35 instruction book. W. M. Gibson, 843 8th Street S.E., Paris, Texas wants a conversion on the BC-669A. J. D. Gavenda, Physics Building, Room 406, University of Texas, Austin 12, Texas wants the instruction book for the BC-1161. Gerald Martin, 59 Warren Street, Whippany, N.J. needs the TBS Navy Transmitter and Receiver manual, while Bill Rowley, Box 334 RT 4, Huntington, W. Va. wants the RDZ manual. Henderson Rogers, W5MFU wants alignment help for the BC-779 and a manual as well. His address is 6206 Grand Ave., Houston 21, Texas. William Parker, 118 E. Highland, Villa Park, Illinois is in need of an APA-38 handbook.

George T. Anderson, 17 Diane Drive, Vernon, Connecticut can supply many handbooks at a very nominal cost to cover handling and postage. Contact him for that elusive manual. 73, Ken,

W2HDM.

Cryptogram

..... de W9ICF

Mack, like many phone men, seems to have mixed up some of his Morse characters and here is the message we received:
TFVZSO YR IAFNQSQ DON RBV
VADTT ASDQ
D NM VFLODT TBUN DON ITSDQ
BUZ BX ZAS EDON (DON DTT
BCSQ FZ ZBB)
EUZ FZ FV JUVZ VBYS TFN IDTT-
FOL IK!
IBQQSIZFBO: AFV SMDIZ HBQNV
HSQS, "VUEVIQFES ZB IK."

..... de W9ICF

SIDE BAND

By: Bob Adams, W3SW

Silver Springs, Md.
P. O. Box 625

WORKED 100 COUNTRY CLUB

Two-Way SSB

(In order of award)

W6UOU	K2JFV	W7IAA	K7GIE	W1WDD
W2JXH	W1ADM	VQ4ERR	W1LHZ	K6LGF
F7AF	T12RC	W8MPW	W2MA	W3VSU
K6GMA	W2CFT	W3MAC	W6BAY	W1OOS
W3SW	K0ABH	W1GR	W5RHW	W9QNO
W41YC	ZL3IA	W8JXM	K4HFX	ON4DM
T12HP	W6BAF	W1EQ	K2EWB	W2MAF
W8QNF	W2TP	W5FDZ	K2HUK	YV5ABD
W61TH	W6RKP	W8JXY	VE3ES	4X4DK
VE3MR	PY2JU	W2OTZ	MP4BBW	VK3AHO
W8GCN	W6UPP	W5BGP	W1DCE	DL1VR
W8EAP	W6PXH	W6WNE	W2ATJ	K8EWK
W8YBZ	W0CVU	W6TNS	KZ5WZ	K0CTL
W0QVZ	W41NL	W4HIM	HB9IE	W4OPM
W0FUH	W8YIN	HB9TL	W6ZEN	W8DJP
W8PQQ	TG9AD	K2HEA	W5KFT	W8MXS
ZL3PJ	W3NKM	W7VEU	K0KWY/4	W9CYL
K2MPE	W6QFE	W4CDY	YV5FK	W1TYQ
W2OQO	W8MG	W6THT	T12EV	W2HMJ
W2VZV	PY4TK	W9HP	W8DMO	
W61AL	K9EAB	W5DA	K2FW	

The Worked 100 Club's membership passed the century mark this month with W8MXS receiving the number 100 certificate. The six new qualifiers are W40PM, W8DJP, W8MXS, W9CYL, W1TYQ and W2HMJ. Congratulations! Incidentally, W8DJP's membership makes four stations in one small town area to work

more than 100 countries. The others are WYBZ, W8GCN and W8PQQ.

Barry, K2IEG tells me that UA0KYA will soon be on SSB in Zone 23. This should make WAZ-SSB possible. Get the certificates ready, Urban.

Zone 17 is also on sideband with UJ8E making his appearance on 14,319. UF6DC can be found around 1900 GMT on 14,322. Other new sideband stations now active are ZK2A, MP4TAE, MP4QAO, HA8WS, PZ1AX, V0ØHA, LA3SG/P, VQ6LQ, GC3LXK, LU5Z, 9M2DB, 9K2AZ, UI8AB and VU2MD. The very choice list has been worked by Bill, V07ZM who is the leading Canadian sidebander. Incidentally Bill has a DXCC total of 284 which isn't bad hunting. Jeri and Pat of 15GN have their own SSB rig on the air now after returning W6UOU's "Argonaut." This rig will be next heard from FB8, Madagascar. Ted Henrich has sent another SSB exciter to VR1B in the Gilberts. EA8BO will soon be active on SSB from the Canaries. AP2V promises to become more active, which is good news since AP2B and AP2CR have long since gone QRT Pakistan. We thank W7VEU and the Willamette Valley DX Club for some of this information.



John, SV0WB, (left) at DL4AS, Mark.



Ralph, 9N1CJ.

Probably the most publicized amateur radio activity to cause many long and frantic pileups is the SSB station in Nepal, 9N1GW. Signals from this exotic country have been expected daily for more than six months. Many reported contacts with 9N1AC and 9N1AD and even with 9N1AA, which is the call assigned to the King of Nepal. All contacts with these stations definitely were not authentic. The smugglers sure had a holiday for a long time. The first amateur to operate from Nepal was Ken Ward, using the call 9N1GW. The following information is furnished by Ralph Dennis, W1CJ who will soon be in Nepal with Glen, and expects to sign 9N1CJ. Ralph, whose picture is shown operating W1CJ/3 is an old timer in Ham radio. The station pictured is the club station for the ACE Radio Club which has been especially constructed to contact the QSOs in Nepal. When W1CJ leaves Washington for his long journey to 9N1-land early in January, the Club call will become K3KJF. All QSLs for the Nepal stations will be handled by the Club. Send self addressed, stamped envelopes to ACE Radio Club, Box 9136, Washington 23, D.C. Tapes with all pertinent information are forwarded to K3KJF weekly.

Because of the intense interest in contacting 9N1GW, it is requested that those stations who have already QSO'd him please refrain from attempting to make additional contacts. When Ralph gets on the air as 9N1CJ chances of QSOs will increase. These stations and possibly more will be operating in Nepal for two years or longer. The following is Ralph's report to me of the purpose of the activity and his own personal plans:

"The Telecommunication Project for the Country of Nepal, which is a small country bordering between India and Tibet will take about 2 or 2½ years to complete. It consists of installation of single sideband radio telephone stations throughout the Country, linked to the home station at Kathmandu, which is the capital of Nepal. This will in turn be linked to the outside world through a similar circuit to New Delhi and Calcutta, India.

Power for all the equipment will not depend on local sources, but will have its own diesel generation units.

Transportation by road to the remote sites is an impossibility, and all material for a complete station will have to be carried by bearers over mountain trails. Distances in many cases are in excess of 200 miles. They are going to have to carry me too for I am not about to walk. This will also call for much camping out each night while on the trail as villages with hotels are non-existent. The problems which we expect to encounter in transporting 750 pound generator plants on human bearers' backs for 200 miles seems like an impossibility but will have to be solved by perseverance and ingenuity. Pack transmitters will be utilized

on the trail for communication to base stations.

I expect my call will be 9N1CJ when I start operating there with a Pacemaker and Thunder Bolt combination and a GPR 90- GSB-1 receiver.

There is expected to be six families over there, three engineers on radio and three on telephone installations. My wife Marjorie will accompany me.

Amateur activity there is and will continue to be purely a recreational sideline as this is not an expedition. Amateurs throughout the world must realize time on the air over there is limited, sometimes through power failures and when business duties take precedence.

We have received some very discourteous and insulting letters from amateurs complaining about operation of 9N1GW. Glen cannot possibly answer all those who call him. It will take time as there are many on CW, AM Phone and those outside of the American Band who would like to make a contact. Operation on all amateur bands is anticipated. The load on Glen should be considerably lightened with two of us active soon. Your patience is requested as those of you who have never operated overseas as choice DX cannot imagine what it is like to be in such a spot."


Ralph who is with Advanced Communications Engineering, the organization responsible for the installations is originally from Ashland, Wisconsin. He has enjoyed a very interesting career in all phases of radio, both with the US government and military and also in private industry. Most of his life has been spent in installations of transmitters. He has been contacting 9N1GW from W1CJ/3 nearly every morning and is very familiar with the problems now existing in obtaining QSOs with Nepal. Good luck Ralph!

John, SVØWB told me that he will close down in January and reluctantly leave a wonderful QTH on Rhodes. SVØWV will continue side band activity from this spot. We show a picture taken by Mark, DL4AS during a visit to his shack. This is the only photo ever taken of John since becoming SVØWB.

I again repeat the necessity of enclosing return postage and fees for certifying or registering your cards and also fifty cents for cost of mailing the certificates. Most of the ones in the past have been sent in a heavy mailing tube by airmail at my personal expense. To ZL and VK etc this can be very costly. Don't forget to make a list of the QSLs furnished in order of the prefixes to be retained in my files. When applying for higher awards, you will not have to send the original cards.

We have received requests to expand the listings each month of Worked SSB Countries to show the latest confirmed totals similar to DXCC. If there is enough interest I may try to do this every four months with a complete total listing at the end of each year.

73, Bob, W3SW.

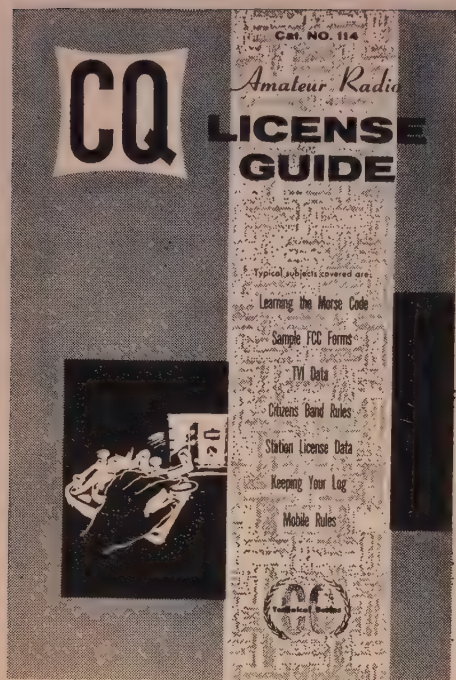

AVAILABLE ← NOW!

212 pages of everything the Amateur must have to get his license and progress toward the general class ticket. Plus many additional pages of vital information for the ham operator.

ONLY \$2⁵⁰

COMING SOON! →

COWAN PUBLISHING CORP.
BOOK DIVISION
300 WEST 43rd STREET
NEW YORK 36, N. Y.

SIRS:

I enclose \$_____. Please send me
_____ copies of the CQ LICENSE GUIDE.

I enclose \$_____. Please send me
_____ copies of the SURPLUS SCHEMATICS
HANDBOOK when printed.

NAME _____


ADDRESS _____

CITY _____ STATE _____

SIGNATURE _____

New York City residents add 3% sales tax.

C 2

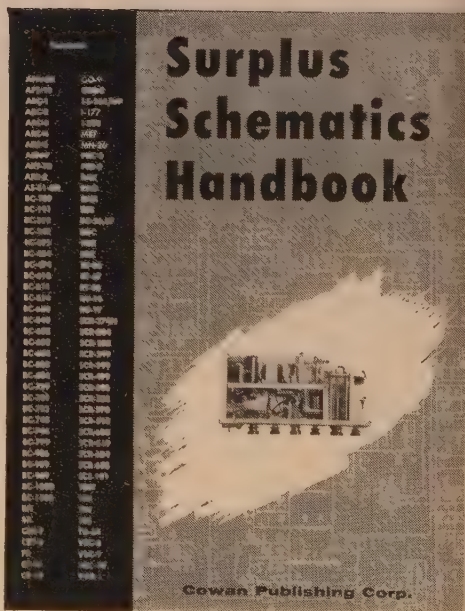

This is a book literally loaded with schematics for all the currently popular pieces of surplus gear. Most amateurs are well aware of the problems encountered in purchasing seemingly inexpensive surplus units, only to find that no schematic diagram is available. Trying to figure out the circuitry cold turkey can be many times more difficult than the most involved puzzle, and purchasing a single instruction book can run as high as \$3.50. Why knock yourself out when you can have a book with complete coverage on hand in your library? All this for only \$2.50.

Amateur Radio Legal Notes

Maurice J. Hindin, W6EUV

6505 Wilshire Boulevard
Los Angeles 48, Calif.

A lawsuit which had an important effect in establishing the law of radio, as it applied to amateur radio, was the case of *Grimes vs. Whitehurst*, 21 Fed (2) 787. The case arose in this way. The City of Wilmore, Kentucky, passed an ordinance requiring all persons, firms or corporations operating a radio broadcast station, either commercial or amateur, to pay a license tax. The ordinance further provided for penalties for failure to pay such a tax. The tax was not levied on the property of the operator or the stations, as such, but was levied on the activity of radio operation. The Plaintiff Grimes was an amateur radio operator. The Defendant Whitehurst was the Chief of Police, of the City of Wilmore. The lawsuit was filed by the amateur against the Chief of Police to restrain him from enforcing this law. The amateur contended that this law was void as an unreasonable restraint on interstate commerce. The City, on the other hand, contended that it was a valid taxing ordinance and that they could legally tax any activity conducted within their town. The case was tried before the United States District Court.

The court held that the law was void and gave judgment in favor of the Plaintiff amateur radio operator. The Court, in its decision, stated that all radio communications are interstate in nature even though the transmitter is located within a particular state and even though the particular transmissions emanating from the station may not cross state lines. The court held that all radio transmissions of necessity affect interstate radio communications, and that, therefore, radio communications are a part of interstate commerce. The court further held in that case that the Congress of the United States has fully occupied the field of radio communication legislation, and that any local ordinance attempting to regulate the same is void.

It should be pointed out that the tax imposed by the City of Wilmore was not a property tax but was a tax on the activity of radio

transmission. Other cases have held that radio equipment, including receiving sets and transmitting sets, is subject to general property taxes just as any other property is subject to those taxes; but this case is highly important in establishing the rule that a city (or for that matter even a state) may not impose a direct tax on radio transmissions.

Another case much later in time followed the law as was established in the *Grimes vs. Whitehurst* case. This other case was the case of *Tampa Times vs. Burnett*, 45 Fed. Supp. 166. In this case, the Plaintiff Tampa Times owned broadcast station WDAE and operated the station in Tampa, Florida. The State of Florida enacted a license tax law, under which it sought to collect taxes from radio broadcast stations. This was an action for an injunction to enjoin the collection of the tax and to enjoin enforcement of the state law. The United States District Court, for the Southern District of Florida, in this case, followed the same reasoning that was announced in the case of *Grimes vs. Whitehurst*. The court in this case again enunciated the principle that Congress has exclusive jurisdiction over the regulation of radio broadcasting, and a state does not have the right to levy a license tax on the business of radio broadcasting which is being operated under a Federal license and under Federal laws. The court in this case again announced the rule that the Federal Government has exclusive jurisdiction in the field of radio communication, and any tax imposed on such activity constitute an unreasonable burden on interstate commerce. The court enjoined the State of Florida from enforcing this law.

As will be pointed out in other articles in this series, even these important cases did not deter cities and states from attempting, in one way or another, to regulate radio transmissions. Various other regulatory laws have been enacted from time to time by states and cities. How these regulations and laws have fared in the courts, will be discussed in other articles from time to time.

73, Maurice, W6EUV

PROPAGATION

George Jacobs, W3AA

607 Beacon Road, Silver Springs,

Last Minute Forecast

Ionospheric storminess is generally quite prevalent during February. Storms of at least moderate intensity, with the likelihood of adverse affects upon shortwave propagation conditions, are forecast for February 2-4, 12-14 and 23-25.

General Conditions

During February the sun's ecliptic takes it into more northern skies, and closer to the earth than during the mid-winter months. As a result, somewhat less ultraviolet radiation sweeps across the ionosphere during the full daylight hours, causing somewhat lower values of daytime MUF's than occurred during the mid-winter months. On the other hand, because of the increased hours of daylight during February, the ionosphere is illuminated by the sun for a longer period of time, and early evening MUF's will be somewhat higher than during the past few months.

During February static levels remain generally low, but begin to rise from mid-winter levels. Ionospheric absorption also begins to increase during February.

Seasonal changes in propagation conditions during February are expected to affect the *hf* Amateur Bands in the following ways:

6 Meters: Daytime MUF's are decreasing. Very few, if any east-openings are forecast. North-south conditions are somewhat better, and the band is expected to open on several days to South America, and perhaps South Africa. South American openings have a tendency to occur a few hours after sunrise until noon-time, and again during the late evening hours.

10 Meters: Fair world-wide propagation conditions are expected during February from shortly after sunrise through the early evening hours.

15 Meters: Good conditions are forecast for this band for most of the period between sunrise and the early evening hours. Because of the seasonal increase in ionospheric absorption, signals may be weak, or fade entirely on many circuits, during the forenoon period.

20 Meters: With increased hours of daylight the band is expected to remain open somewhat longer into the evening hours than during the mid-winter months. Optimum conditions are expected during the late afternoon and early evening hours, and again shortly after sunrise, when openings should be possible to most areas of the world.

40 Meters: Fairly good propagation conditions during the evening hours are expected to continue on this band. Static levels are expected to remain relatively low during the early part of the month, but should increase in intensity towards the end of the month. Early morning openings to Australasia, peaking just before sunrise, are expected to improve considerably during the month.

80 Meters: No better than fair propagation conditions are expected during the month. The increase in static levels and absorption will be quite noticeable on this band. DX openings with generally weak signals, should be possible in some areas of the world during the hours of darkness.

160 Meters: During February higher static levels are expected to result in poorer skywave propagation conditions on this band. Openings to about 1500 miles should be possible on several nights, and when static levels are lower than usual, the skip may extend out considerably further. Long distance propagation conditions usually peak on this band between an hour or so before sunrise and about a half hour after the sun has risen on the most eastern end of the circuit.

Charts

The *Propagation Charts* are on a well earned vacation this month. They'll return in next month's issue.

Contest Critique

Propagation information is now available from several ionospheric measuring stations giving a world-wide picture of propagation conditions existing during the recent *CQ DX Contest*. There appears to be unanimous agreement that good conditions were observed during the *Phone* period, from 0200 GMT October 24th through 0200 GMT October 26th. All stations for which information is available rated conditions between 6 and 8 on the international scale (between fair to good to very good). The *CQ* forecast for the *Phone* period called for "generally good" conditions. The good propagation conditions observed during the *Phone*

[Continued on page 106]

The comments in this column on the Heath B-1 seem to have generated a storm of interest among hams and C/Bs. A demonstration before a local ham club may result in a club project to construct these flexible units on a mass production basis. As everyone suspected, this unit is going to be just as popular with hams as with C/Bs. The suggestion that six meters was a distinct possibility brought an immediate reply from WA2GJT. Jim had already made the successful conversion and recommends it for a *high-fun* power rig. Anyone care to try for 2?

Reg Info

Following up the comments on regulations, the mail bag turned up a very interesting document that was ordered recently from the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C. As many of you know, the Rules and Regulations of the FCC are contained in various parts. Part 12 and Part 19 cover the Amateur Radio Service and the Citizens Radio Service, respectively. Heretofore, these parts have been available separately. Now, under a system adopted last year, the FCC plans to group these parts into volumes and they will be available only in volume units. Volume VI, dated August 1959, covers both of the above services as well as the Disaster Communications Service. Since C/B rules require that applicants have in their possession, at time of application, a copy of Part 19, future applicants must obtain this publication. Again, it is available only from the above source. Price: \$1.25.

The format of the new rules is the best we've seen. It is looseleaf and fits a standard 3-ring binder. Further, your \$1.25 entitles you to all amendments; apparently for an indefinite time. These will be issued in page substitution form, so you won't have to bother crossing out lines and pasting in paragraphs.

Remember, this publication is a must for C/Bs, and hams will find it a new and easy way to keep up with amateur rules and also find out more about C/B operation.

Let's take a peak inside.

Subpart D

No changes under Station Operating Requirements, but perhaps we should take a fresh look at the first section, 19.61, *Permissible Communications*. Simply stated: *you may* communicate with other stations in the Citizens Radio Service; *you may not* communicate with stations operating in other services licensed by this country, and positively no contacts with foreign stations. Amateur stations in some foreign countries are permitted to use the 27 mc band, and with ionospheric conditions at

another peak many are being heard here. Resist the temptation—it will likely cost you your license if you succumb.

Paragraph (C) specifies the limiting of communications to the minimum practicable transmission time. This of course means—no rag chewing and points up further the purpose of Citizens Radio . . . to provide for private short-distance radio communications. . . .

The paragraphs referred to above are really quite lenient, providing you're not attempting to thwart the regulations completely. We have reason to believe that some changes are proposed in this Subpart with the view to a more strict enforcement of their intent. There is little perhaps that can be done about this instance, but it is worthwhile to note that the FCC intends to adhere to its original plans for the establishment of the service.

Antenna Restriction Eased

No—you can't put that antenna above the 20 foot mark, but section 19.25 (c) no longer places a limitation on the distance that the transmitter may be placed from the center of the antenna. It was 25 feet. Actually, this change occurred a year ago, but the amendment was received only a few months ago and there have been too many other things to talk about since. With the new system, we believe that all future changes in the regs can appear in this column at about the time they become effective.

New Coaxial Antenna

For a month now we've been testing a new half-wave coaxial antenna made by HI-PAR Products Co., Fitchburg, Mass. The model CO-27 has proved to be a reliable performer, and what is just as important, it's designed to strain the pocketbook very little more than the raw materials would stand you. It is all aluminum and high grade seamless tubing. The center hub is a really rugged aluminum casting with a built-in, completely weatherproofed coax connector. Extremely light, this antenna is a cinch to mount. Regular 1¼ inch TV masting supports it and it may be mounted with chimney or sidewall brackets. Believe it or not; it weighs 2 lbs., 14 oz. RG59/U cable should be used, but little loss will be encountered with RG58/U. Assembly time: under ten minutes.

New Call Book

International Crystal Mfg. Co., advises that they'll have a new call book out this month listing calls issued up to January 1! They certainly deserve the thanks of all C/Bs for this valuable publication.

[Continued on page 106]

VHF

50mc. 144mc. 220mc. 420mc. and above

Sam Harris, W1FZJ

P. O. Box 334 Medfield, Mass.

Probably the only good thing a good VHFer can do this time of the year is to sit back and take stock of his accomplishments for the year. It always seems to me that I end up with a darn small amount to show for all the effort expended. To make matters worse there always seems to be twice as much to do as there was last stock taking time. Furthermore, the outdoor projects always come during the winter months, while we get our summer tan doing bench work on the indoor jobs. As a matter of fact the Rhododendron Swamp VHF Society members all agree that no antenna will perform satisfactorily unless it is erected during a snow storm.

Speaking of the R.S.V.H.F.S. and taking stock, I wonder how many of you belong to VHF clubs. It is a real pleasure to receive news about VHF clubs and their activities. Particularly their method of keeping the membership interested. Many of these groups have been in existence since before the last war. Some, like the Midwest VHF Society and the Mobileers, have rosters over the one hundred mark. Others have less than a dozen members. The important thing in any organization, regardless of size, is to have a purpose. The question is: Are you?

The R.S.V.H.F.S. (Rhododendron Swamp VHF Society) for instance has as its avowed purpose, the advancement of the state of the art as pertains to VHF/UHF communication. We are just a small club (12 members) and sometimes it seems like advancing the state of the art is an unattainable goal. Doesn't stop us from trying however. Prime target (outside of winning 80 meter DX contests) has always

been *THE MOON*. We haven't had much luck yet, but we sure have put a lot of effort into it. We aren't making a secret of it. We welcome suggestions and help from all comers and are happy to give out all the information we have. We point out once again that we are not trying on two meters at this time. That doesn't mean we never will but results so far on six and two meters have not been successful. We have heard our own signals on occasion but not with sufficient reliability to permit communication. Prime problems arise from faraday polarization shift and too low E.R.P. The easiest way to beat both of these problems is to go higher in frequency. 220 mc isn't high enough. 420 mc has still got that stupid power limitation. That brings us to 1296. With old fashioned receivers this would have been a poor choice. With paramps it looks like the best possible choice. Sky temperatures are at a minimum. Faraday rotation is negligible. Antenna gain, and hence E.R.P. is possible with reasonable sized arrays. (For instance, an 18 foot parabolic dish can give 30 to 35 db gain.) If you go to the trouble of calculating your chances with a 100° receiver front end, an 18 foot, 35 db antenna, a 100 cps bandwidth and 300 watts output from the transmitter, you find that you will end up with a positive signal to noise ratio.

So there you have our latest project. We expect to be operating in February. You gonna help us???

Spiralrays and Towers

Get lots of inquiries about our Telrex 11 element, six meter spiralray. Well we are writing a report on it and I can tell you right now

at Helen really likes it. The only thing holding up the works is the so far impossible task of getting a picture of it. The best efforts so far might get me 1 libel suit from Mike. The darn thing looks good to the eye but the camera always makes it look like it just blew over in a high wind. We are still trying though, so don't give up.

Meanwhile, the tower business has been booming. The R.S.V.H.F.S. just completed a new 170 foot effort. Tower is one of Rohn's, number 40G. It costs a little more but boy that 8" on a side baby gives you a real solid feel when you are way up there looking down. The big problem is: What do we put on top? Helen wants 64 elements for six. P. Day wants an 80 meter square corner. What do you think?

Dayton

Sound the trumpets! Shout from the house-tops! First news of Spring 1960 "HAMVENTION" has come through.

Larry Brandenburg, W8TEK, is the new VHF sessions moderator, and after seeing Larry in action just "helping out" for the past few Hamventions, I shudder to think about the way he and the other poor Dayton VHFers are going to be running around for the next few months. Larry has the knack of "getting things done."

He has just one comment so far—"you said it couldn't be done again Sam, but we're going to do it and better—wait and see!"

Now is the time fellas! When you read this sit down and write Larry immediately for either reservations or information. Preferably reservations, as I expect to see every VHFer this side of the Missouri at Dayton in the Spring. Hope that many, many more of you make it too, 'cause you just "man't miss" on this one.

Susquehanna, Pennsylvania George Vacca, Sr., (K3HRF) sez: "Six meter work is going very strong here in Northeastern section of Pennsylvania. Three new stations will be on the air for a total of nine stations in Susquehanna County. Our local AREC control is K2ERQ in Binghamton, New York, with station K3HRF acting as Susquehanna County Net Control. Anywhere from forty-five to sixty stations are checking in every Friday night at 2100 at 50.4 to area Net Control H.Q."

"Two meter work is going very good and should find fifteen to twenty-five stations on two meters in this area in the next four to six weeks."

"No F-2 openings to speak of from this area but ground wave conditions of 100-275 miles are fairly good with a lot of the upstate New York stations (K2IXN, K2ZBU, K2QWD) doing very well in Eastern Pennsylvania."

"K2RRM/2 is doing by far the best local six meter work from the new portable location. Doc is covering four hundred to six hundred miles with no trouble; his location is over 2050 ft. above sea level and K2RRM/2

will be on two meters and 1 1/4 meters by contest time." *Very good to get this news from your area George, and continued good luck to all of you.*

Canoga Park, California Denny Williams, (K6UMM) comes through from Canoga Park with:

"Just a line to let you now what's happening on six meters in the Los Angeles area. To put it bluntly—nothing. The band has been just about dead."

"On November 17th at 0854 PST., I worked W4FT and at 0930 PST., worked K2TYW, both coming in about 4-6 copy. Nothing from the East coming in from that day until now."

"The 28th of November at 2040 PST, I talked with W5HOI, Mina, and her O.M., W5HOD, Gene, in Amarillo. Only other station which came through was Phil, W5SFW."

"I've added an HRO-50T receiver and a Tapetone converter to the shack. Both work real fine."

"Was heard in Argentina on November 5th around 1037 PST but heard nothing here." *Looks like it's about the same all over Denny, band is just about the same condition in this area.*

Lancaster, Pennsylvania Good ole George, (W3FEY) comes through with some 220 mc news:

"I am preparing a list of all stations on 220 mc and up that I can get information on. How about asking the boys active on the bands above 220 to send me dope on their stations, and usual operating hours? *All right fellows, consider yourselves asked, and send the information to George at 858 Eden Rd., Lancaster, Pa., at once.* Anybody that wants a copy of the resulting list should include a stamped self addressed envelope. Have patience, this project will probably take several months."

"I have 1296 mc gear built by W1WID ready to go on 24 hour notice. (Antenna is down at the moment.) *Well this is no weather to be gettin' it way Up thar!* I have worked W3ARW on 1296 and would like schedules with other stations within reasonable range. (150-200 miles)."

"Have been hearing Northern New Jersey stations regularly on 220 but haven't had any luck raising them in the past few weeks. I am on every night at 2130 EST for a schedule with K2CBA and I check NNE about 2145 each night. Frequencies, W3FEY-220.17, K2CBA-220.01. I also check 432 mc at 2200 EST whenever possible. My frequency is 432.17."

"W1IJD (KF1FN) will be on 50 mc from Fletcher's Ice Island during the month of February, probably with a KL7 call. (Ice islands move don't they?) *Your guess is as good as mine George, and I imagine you're right. Thanks for the quantity and quality of your news. All most interesting to the VHF fraternity.*



W1TQZ inspecting the declination bearing. W1FRR, W1OOP, W1HIV and Larry Peavy give advice.

Frank Le Baron (W1TQZ) installs the declination bearing on the 1296 mc polar mount at the R.S.V.H.F.S. A complete run down on this antenna mount is in preparation. Design and construction was done by Frank.



Tucson, Arizona Finally came across a letter from "out that a way," and who should it be from but Jerry Walker (W7FGG).

"We are very glad to see your suggestion for SSB on VHF. We feel it is a very good idea and have just finished converting to high level mixers and SSB operation."

"We are now on SSB on 50, 144, and 220. (Whew!) The Pacemaker is the SSB generator on 14 mc or 28 mc with no noticeable difference."

"On 50 mc, a 6146 mixer drives a pair of 4.25A's. A 6U8 OSC and AMP runs on 30 mc. On 144 mc, two 6146's serve as a mixer to drive 4-125A's which loaf to drive a 5762 GG AMP. On 220, a 5894 operates as a mixer to drive a pair of 4X150A's, later to be followed by a pair of 4CX300 GG. Naturally cw is available as well as SSB, and by injecting carrier AM is available (*under duress?*) for non BFO stations."

"With the exception of the 220 rig which was built with a high level mixing deal in mind all the other rigs originally went straight through and were converted. We get SSB into the screen with a non ind resistance serving as a load since very little SSB is needed, and most generators today would deliver far too much. This does away with any tuning necessary in the screen."

"Incidentally, we have a 64 element 8 of 8 ele tiltable antenna, but for some reason we don't get anything back on Moon Bounce on 144. The converter is 416B and power is full kw. The antenna shows by comparison about 22 db gain. Still no return. Would like to try skeds and are available nights and week ends. Have low frequency gear available for liaison and information exchange. All low bands are available SSB, CW, or AM. Open for skeds on 50, 144 and 220." *Very, very interesting Jerry! Shows how much time and effort you have put into your VHF. Keep up the good work and be sure to keep us informed.*

Dayton, Ohio From the home of the now famous "HAMVENTION," and from the boy that made the VHF part of it famous, Ev Taylor (W8NAF) comes forth with: "New officers for the 'Dayton Amateur Radio Association' voted in on December 4th, 1959, were—Pres.

W8ZCV (50 mc-144 mc-220-420-TV)
V.P. W8ARC (50-144)
Secr. K8BPC (50-144)
Treas. W8INQ (50-144)
Direc. W8GFN (50-144)

"Attendance at the meeting was 180, a total of 139 votes were cast." *Hey, gang! Can your club make such a claim?*

"Have been working on a new converter and it seems to be quite the thing. Watch for it!" *We will Ev, if it comes from Hamvention town, and VHF NAF, it's got to be good.*

73, Sam, W1FZS


Installing the Polar Mount for the 1296 mc dish at the R.S.V.H.F.S. Larry Peavy inspecting the polar bearing. Frank (W1TQZ), Fred (W1FRR), Henry (W1OOP), and Paul (W1PYM) in attendance.



The declination axis swinging into place. W1TQZ up. W1FRR, W1OOP, W1HIV, W1PYM and Larry holding the rope. 18 foot Kennedy dish ready to mount at lower right.



The Dish ready to be hoisted into place. Paul (W1PYM), Frank (W1TQZ), Henry (W1OOP) and Fred (W1FRR), looking pretty for the photographer.

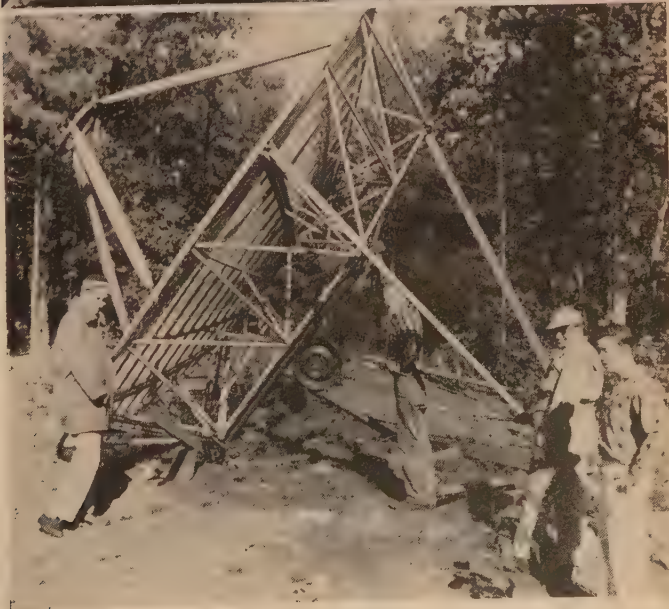



by Louisa B. Sando, W5RZJ
212 Sombrie Drive, Santa Fe, N.M.


Calling All YLs

To the 2nd Annual California YL Convention, to be held at Sacramento, March 4-6, 1960. These also are the dates of the Camellia Festival. The convention will be held at the new El Mirador near downtown Sacramento. Plans include an open house party at the hotel Fri. night, the Camellia Show on Sat. A.M., YL luncheon at noon, and a dinner for YL's and OM's Sat. evening. Hostesses for the Convention will be members of the Camellia Capital Chirps with K6ENK, Wanda, chairman.

W6WRT—Silent Key

It is with a heavy heart we record here that Ruby Word, W6WRT, joined the Silent Keys on Oct. 12, 1959. Ruby became W9TAB in 1941, a year after OM Harl went on the air as W9HDK. A move to Calif. brought them the calls W6WRT-W6UTZ, and during WW II Ruby worked for Fletcher Aviation. They returned to Missouri in '46 and operated as WØTAB-WØHDK, but in '51 once again became W6WRT-W6UTZ. Ruby joined YLRL in '41, was a charter member and past secretary of L.A. YLRC and had served as custodian of the club's Lads 'n Lassies certificate. She held YLCC (400), WAC/YL, WAS/YL, DX-YL, WAYL (So. Africa), and many YL club certificates. Ruby and Harl have one jr. op, 14-yr. old Robert.

To this YL, as to all who knew her, W6WRT was a sincere, loyal friend—one who will ever be remembered.

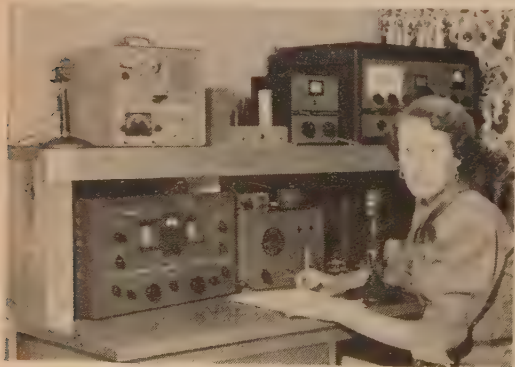

W6WRT, Ruby Word

"Howdy Week" Contest

"Howdy Week," initiated in Sept. '59 by YLRL V.P., Gladys, W6DXI (now president) had as its main purpose the opportunity for YLs to get better acquainted. Those who participated felt there just weren't enough YLs on, but maybe more will get into the swings of it next year. Winner in the contest was W6QGX, Harryette, with 176 points. Next high scores: K5BNQ, 136; K4RNS, 131; K9QGR, 106.

WAS/YL, DX-YL Rules

W6DXI wishes to clarify the status of Hawaii in regard to the above awards. Since Hawaii officially became a State Aug. 21, 1959, WAS/YL will require 50 confirmations for the certificate as of that date. As of that date, also, Hawaii can no longer be counted as a DX contact for the DX-YL award.

Awards to K6IKF

For six nights out of seven, K6IKF, Gil George, runs phone patches between 10 and 12:30 p.m. PST. Regular skeds include Adak, Okinawa, Eniwetok, Parry Is., Midway and the South Pole. She also picks up patches from Greenland, Alaska, Guam, Hawaii, and ice cutters in the Arctic Ocean. In the last two years these patches have totaled about 3000. For her devotion to her task, Gil received four different citations this past summer. The last was brought to her by an operator from KX6BP, and is a framed photo of an atomic bomb explosion in the water. Hand painted in the lower corners are pictures of Gil and her OM, K6CHA, and it bears this inscription: *Gilberte George, K6IKF, has devoted extraordinary time and effort to provide us with excellent communications to our families and friends via Amateur Radio; has been diligent and faithful in meeting our schedules and has at all times shown patience and understanding. We award to Gil the ATOMIC GOLD MEDAL OF HONOR. With best wishes and sincere appreciation for the men of Holmes and Narver at the Eniwetok Proving Ground, Marshall Islands, July 1, 1959.*

All of K6IKF's work is done on 20m SSB, running about 500 watts to a 65 foot high beam. Licensed since 1955, Gil works during the day as secretary to the CD director of Pomona and she also is in RACES.

11th Annual YL-OM Contest

Phone: Starts Sat., Feb. 27, 1960, 1:00 p.m. EST. Ends Sun., Feb. 28, 1960, 12 midnight, EST.

CW: Starts Sat., March 12, 1960, 1:00 p.m. EST. Ends Sun., March 13, 1960, 12 midnight.

Eligibility: All licensed OM, YL and XYL operators throughout the world are invited to participate.

Operation: All bands may be used. Cross-band operation is not permitted.

Procedure: OMs call "CQ YL." YLs call "CQ OM."

Exchange: QSO number, RS or RST report, name of State, U.S. Possession, VE district, or country.

- Scoring:**
- Phone and CW contests will be scored as separate contests.
 - One point is earned for each station worked. YL to OM or OM to YL. A station may be contacted no more than once in each contest for credit.
 - Multiply the number of QSOs by the number of different States, U.S. Possessions, VE districts, and countries worked. (Maryland and the District of Columbia count as one State.)
 - Contestant running 150 watts input or less at all times may multiply the result of item (c) by 1.25 (low power multiplier).

Logs: Copies of all phone and cw logs, showing claimed score, must be postmarked not later than March 31, 1960, and be received not later than April 15, 1960, or they will be disqualified. Please file separate logs for each mode of operation. Send logs directly to YLRL vice-president Lillian E. Beebe, W5EGD/3, 923 Kent Ave., Baltimore 28, Maryland. Be sure to include Zone Number.

Awards: YL First place PHONE — cup
First place CW — cup

OM First place PHONE — cup
First place CW — cup

The winner of the Phone cup is also eligible for the CW cup. Certificates will be awarded to high place Phone and CW winners in each district, U.S. Possession and country.

WRONE—3rd YLRL Convention

These days you can't speak of one without the other! Many WRONE members and guests enjoyed luncheon at the Towne Lyne House, Lynnfield, Mass. on Nov. 7, planned by committee members K1IZT, W1TUD and W1HOY. The WRONE certificate was presented and it is now ready for all who earn it (see Aug. CQ for rules). The custodian: K1EAV, Belle Bunney, 47 Pine St., No. Billerica, Mass. WRONE's Executive Committee for 1960 was announced: Chairman W1HOY, Helen; members, K1ADY, Mary; W1COL, Marie; K1GPE, June, and W1UKR, Eunice.

The forthcoming 3rd International YLRL Convention (June 17-19, 1960, Cambridge, Mass.) was main topic of the meeting and all committees reported great progress. On display was the hairpin lace afghan (convention prize) and the first three squares, embroidered by YL clubs, returned for the prize bedspread (Floridora, LARK, HAWK). (Tickets for the spread and afghan are 25¢ each and may be obtained from any YL club or from Chata Swenson, W1RLQ, Box 193, Morningdale, Mass.) Convention plans include special entertainment for the OM's, with this committee in charge: W1FZJ, K1GUU, K1HTK, W1RCJ.

New YL Club

Another brand new YL club to report. It is nameless at this writing (mid-Nov.), but its location is St. Louis, Mo. Club officers: Pres., WØMRJ, May; V.P. and Program Chm, KØMAS, Libby; secy, KØOSC, Polly; treas., Lora Euler. Aims for the club are to increase members understanding of radio and to give help to other women interested in becoming Hams. The gals extend an invitation to anyone in the St. Louis area interested in the club to obtain additional information from the secretary, KØOSC, at 2025 Maury Ave., St. Louis.

TYLRUN Party

The WHO club of Ft. Worth entertained members of TYLRUN on Nov. 7 for the net's
[Continued on page 110]



Gil George, K6IKF.

CONTEST CALENDAR

by Frank Anzalone, W1WY

14 Sherwood Road, Stamford, Conn.

Last Minute Report

REF CW starts 1300 GMT, Saturday, Feb. 27.
Ends 2100 GMT, Sunday, Feb. 28.

January	30-31 — CQ WW SSB
February	5- 7 — ARRL DX Phone
"	12-14 — QCWA Party
"	19-21 — ARRL DX CW
"	27-28 — YL/OM Phone
March	4- 6 — ARRL DX Phone
"	11-13 — CQ 160 CW
"	12-13 — YL/OM CW
"	18-20 — ARRL DX CW

CQ WW SSB

Starts: 18.00 GMT Saturday, January 30th.

Ends: 18.00 GMT Sunday, January 31st.

Check Bob Adams, W3SW column for the past two months for all the details on this one. With the ever increasing SSB activity, this promises to be a real "humdinger."

ARRL DX Phone

Starts: 24.00 GMT Friday, February 5th.

Ends: 24.00 GMT Sunday, February 7th.

CW

Starts: 24.00 GMT Friday, February 19th.

Ends: 24.00 GMT Sunday, February 21st.

The second half of each contest starts and ends at the same time shown above on their respective dates. March 4-6 for Phone and March 18-20 for CW.

This is the 26th year for this DX competition which just about makes it the granddaddy of them all.

It's the world working the United States and Canada, and for the first time Alaska and Hawaii too, now that they are states, making a total of 21 call areas that can be worked by the overseas boys.

So KL7s and KH6s take note. You can now concentrate and work DX only. W/VE contacts do not count. This should make a certain group of KL7s happy.

But enough—if you must have more information, write to the ARRL Comm. Dept. They will also be happy to supply you with log forms, for free too.

QCWA Party

Starts: 16.00 PST Friday, February 12th.

Ends: 16.00 PST Sunday, February 14th.

Once again the Northwest Chapter of the Quarter Century Wireless Association is sponsoring a party for the Ole Timers.

This is not a contest but a wonderful opportunity for the boys, who have been pounding brass for the past 25 years or more, to re-new old acquaintances. Of course some of them have joined the "duck quackers" but in any event you will find them on the following frequencies.

BAND	CW	AM	SSB
75/80 M	3655 kc	3950 kc	3990 kc LSB
40 M	7125 kc	7210 kc	7205 kc LSB
20 M	14110 kc	14240 kc	14280 kc USB
15 M	21100 kc	21340 kc	21415 kc USB
10 M	28100 kc	28900 kc	28675 kc USB
6 M		50200 kc	

When contacting a fellow QCWAer, you can exchange contact number, signal report, QTH, your handle and National QCWA Nr. Of course your log should indicate the time, frequency and etc.

The Northwest Chapter does not solicit logs but they will be happy to receive your reports. No awards are planned but I bet if they receive enough logs, the "Top Banana" will get some kind of an award.

Send your logs to the Club Secretary, Dr. F. Clifford J. Spike, W7OS, 1015 Medical Arts Bldg., Tacoma 2, Wash.

YL/OM Phone

Starts: 1.00 PM EST Saturday, February 27th.

Ends: 12.00 M. EST Sunday, February 28th.

CW

Starts: 1.00 PM EST Saturday, March 12th.

Ends: 12.00 M. EST Sunday, March 13th.

This is the 11th annual running of this contest. Louisa Sando, W5RZJ tells you all about it in her column this month.

CQ 160 CW

Starts: 9.00 PM EST Friday, March 11th.

Ends: 9.00 AM EST Sunday, March 13th.

The idea for this contest was suggested by VE3BWY in W1BB's 160 Meter Bulletin. Stew Perry, W1BB and Charlie O'Brien, W2EQS worked out the rules. Our Hon. Editor, W2NSD gave us the green light.

[Continued on page 108]

3 of the Finest AMATEUR TRANSMITTERS BUILT

SAYS LEO I. MEYERSON, W0GFQ, PRESIDENT OF

"the house the hams built!"

Here are three handsomely designed, commercially constructed, high 'watt per dollar' transmitters from Globe Electronics, . . . for the novice and the advanced ham. These are just a few of the great Globe Products carried in stock by World Radio, the "World's Largest Distributor of Amateur Radio Equipment". You'll always find at World late serial number equipment from the nation's leading manufacturers of all ham gear. The next time you buy, I invite you to check first the World Radio deal . . . with high trade-in guaranteed on your present equipment.



GLOBE CHAMPION 350

A 10-160M single knob bandswitching Xmtr. for operating SB without sacrificing top AM performance. 350w CW, 275w AM, 450w SSB (PEP) with 10w external exciter. Filtered keying circuit virtually eliminates key clicks. Built-in, highly stable VFO with new dial drive, "smooth as glass" and non-slip. Adjustable bias control for SB operation. Extensively TVI-suppressed, filtered and by-passed. High level class B modulation without usual clipping distortion. Pi-Net output, 48-300 ohms. Push-to-talk, antenna changeover relay, etc.

\$49.50 down
\$22.28 per mo.
Or \$495.00 net

GLOBE SCOUT DELUXE

A versatile 90w CW, 75w fone transmitter of smart modern design, packed with top of smart modern features. Bandswitching 80-6 meters, straight through operation of final meters, high efficiency and output on ALL bands; panel adjustment of loading on ALL bands. Pi-net matches 50-300 ohms on 80-10, and 50-75 ohms link output on 6 meters. High level plate modulation using new husky 7027A modulator tube. Just plug in VFO or crystal. Dual Xmtr./VFO keying provisions for CW. More output on 6 meters than some exciter linear combinations. Extensively shielded and filtered with separate final RF shield and built in power supply and many other features.

\$15.00 down
\$8.70 per mo. \$149.95 net

GLOBE CHIEF DELUXE

Also features the compact-modern design, 90 watts CW for the advanced CW enthusiast or novice (at 75w input). Choice of cathode or bias keying; — no rewiring to use external 755A Vfo. UM-1 or SM-90 modulators . . . just plug in. Built-in power supply. Husky parallel 807 final for time-proven performance. New design Pi-Net for extra wide range matching and standard coax output terminal, relay voltage and other features. Easy multi-color kit diagrams for simple assembly.

Wired: \$79.95
\$8.00 down \$5.00 per mo.
Kit: \$59.95
\$6.00 down \$5.00 per mo.

PAY ONLY

10%

DOWN
ON ALL
EQUIPMENT

TOP RECONDITIONED EQPT.
FOR THE ECONOMY MINDED

EASY TIME
PAYMENTS

PROMPT
SHIPMENTS

23 HAMS HERE TO
SERVE YOU

FREE 1960
CATALOG
200 Pages of
Ham Bargains



LEO: RUSH ME ☐ FREE CATALOG ☐ LATEST RECOND. EQPT. LISTS,
AND COMPLETE INFO ON THE GLOBE ☐ Champ ☐ Chief ☐ Scout

WRL

WORLD RADIO LABORATORIES

3415 W. BROADWAY

PHONE 2-0277

COUNCIL BLUFFS, IOWA

C-2

NAME: _____

CALL _____

ADDRESS: _____

CITY & STATE: _____

For further information, check number 24 on page 126.

February, 1960 • CQ • 93

New... Improved!




ROTATING TOWER

HZRN SERIES

Look At These All New Features!

- New roller guides for smooth, silent, frictionless raising and lowering.
- New rotating ring with large, sealed, precision ball bearings. You can rotate the entire tower with the tip of your finger!
- Increased strength and greater weight for utmost safety.
- New triple-coated finish for maximum weather protection.
- Plus many more new, exciting features!

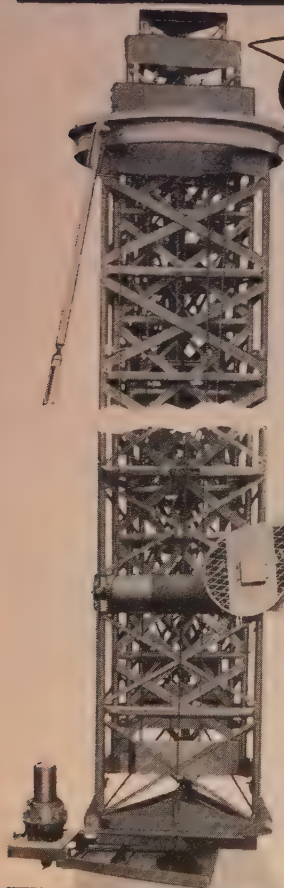

NEW!

TOWER RAISING and LOWERING and ROTATING UNIT

Enjoy the convenience and ease of remote control. Here's everything you need to completely motorize your tower!

Write today for catalog describing and illustrating the most complete line of towers for amateurs and industry...from low-cost economy models to the most deluxe.

TRI-EX TOWER CORP.

127 East Inyo Street, Tulare, Calif.

For further information, check number 25 on page 126.


94 • CQ • February, 1960

CLUB BULL. [from page 12]

BCARC was given a wonderful demonstration of the new wonders of RTTY by Dick, W3CRO, Engineer, and Phil, W2JAV, President of the So. Jersey Radio Ass'n.—(The Xmitter), Bucks County A.R.C. Last meeting concerned a talk on T.V. Servicing by Tom, G3HGE. Next meeting will be judging the exhibition of home-constructed gear for grand prize.—(Lea Valley Reflector), Enfield Group R.S.G.B., England. Lt. Colvin and XYL will talk about "Travel, DX, and Amateur Radio". Colored movies of their Caribbean trip to be shown.—(Standing Wave News), South County A.R.S.

Hope this helps you, chaps.

73, Marv. VE3DQX

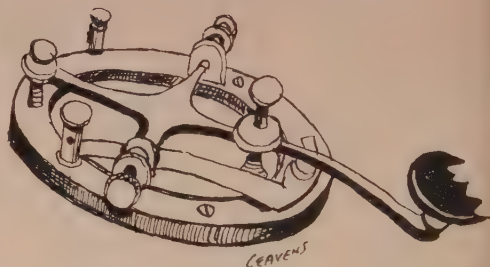

SCRATCHI [from page 10]

must agreeing I reely having loud dot on air, you not thinking?

Now, only trouble I having is that very difficult to have QSO. Oh, I trying, Hon. Ed. all rite. First I sending reel fast dash, then wateing one second, then sending dot, then wateing one second, and sending fast dash, then dot. In no time at all sending seek-you. Trouble is, nobuddies listening are thinking anybuddies sending that slow.

That's where needing your help. Wanting to organize all amchoors into SAPS. So, please, reel-quick-like, telling all reeders of your Hon. Mag. that here are how they can being SAPS.

First, increasing power so single dot being full kilowhat as read on plate meter. Next, get on air, and send one dot or dash per second. Be surely to wateing one full second, so input not going over one kilowhat. Hon. Ed., that's all there is to it!!

Now you seeing how SAPS solving all problems. If everybuddies wateing one second between dot or dash, there being lots more spectrum space. There even being time in the one second that you are wateing for some other amchoor to come on and transmit during that second, and be wateing during second you transmitting. So, saving spectrum space like fury.

Second, everybuddies can read see-w at that speed, on acct. one dot or dash every other second is six characters per minute which samelike one words per minute. This meening on amchoor bands that every QSO is copied 100 percent!!

you get **Henry's** **DOUBLE** Guarantee


of
SAISFACTION **WHEN YOU**
TRADE UP TO

Guaranteed by Both HENRY
and COLLINS

Collins KWM-2 TRANSCEIVER

OTHER COLLINS MODELS—

MODEL	NET PRICE
KWM-2 SSB Transceiver.....	\$1095.00
30S-1 Linear	1470.00
32S-1 Transmitter	590.00
516F-2 AC Power Supply	105.00
516E-1 12V DC Power Supply.....	262.00
75S-1 Receiver	495.00
312B-3 Speaker	27.50
312B-4 Speaker Console.....	185.00

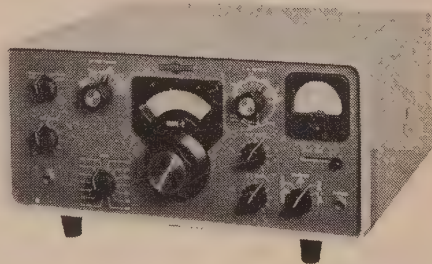

Cash Price \$1095.00
\$109.50 DOWN
20 Monthly Payments of \$54.75

HENRY gives you the finest terms and service.

Top Trade-Ins . . . We plan to top all offers! Your present equipment makes the down payment. Write for offer.

World's Best Terms . . . 90 days open account or 10% down—up to 20 months or longer. We finance. Payment within 90 days cancels all interest. Write for details.

Personal Service—Fast Delivery . . . Your inquiries and orders handled same day. Write, phone or wire.

Complete Stocks . . . Henry has everything in the amateur equipment field, new or used . . . transmitters, receivers, beam antennae, rotators, etc.

Write, Wire, Phone or Visit either store today.

Butler 1, Mo.

Orchard 9-3127



Henry Radio Stores

GRanite 7-6701

11240 West Olympic Blvd.

Los Angeles 84, Calif.



BOB HENRY
WØARA
Butler, Mo.

TED HENRY
W6UOU
Los Angeles



"World's Largest Distributors of Short Wave Receivers."

For further information, check number 26 on page 126.

GUARANTEED CRYSTALS!

CITIZENS BAND — 11 METERS — .005% TOL.

26.965 mc to 27.225 mc—3rd Overtone
Herm. Sealed or FT-243 \$3.75

13.4825 mc to 13.6125 mc—2nd Harmonic
Herm. Sealed or FT-243 \$3.75

6741.25 kc to 6806.25 kc—4th Harmonic
FT-243 Only \$2.99

Special! FT-243 Prec. Calib. to 1st Decimal

2 Meters | Exam: *8010.6 x 18=144.190
| Exam: *8010 x 18=144.180
Note—10 KC difference between the above

6 Meters | Exam: *8340.6 x 6=50043.6
| Exam: *8340 x 6=50040
Note—3.6 KC difference between the above

Calibrated FT-243 as exam. above ea. \$1.29

Thin-Line FT-243—6 Met-50 meg. to 52.44 meg. ea. \$1.79

52.45 meg. to 54 meg. ea. \$2.39

2 Meters, 144 meg. to 148 meg. ea. \$1.79

Harmonically Sealed Fund. 01 Tol. ea. \$2.50

**Stock
Freq.
Only**

NOVICE BAND FT-243 Fund. or DC-34 Freq. \$1.29

80 Met. 3781-3748—Steps of 1 KC. FT-243 or DC-34

40 Met. 7158-7199—Steps of 1 KC. FT-243 only

Dbl. to 40 Met. 3576-3599. Steps of 1 KC. FT-243 or DC-34

15 Met. 3276-3312—7034-7083 Steps of 1 KC. FT-243

4035	5205	5975	6400	6973	7444	7810	8004	8275	8608
4045	5215	5985	6410	6983	7454	7820	8014	8285	8618
4055	5225	5995	6420	6993	7464	7830	8024	8295	8628
4065	5235	6005	6430	7003	7474	7840	8034	8305	8638
4075	5245	6015	6440	7013	7484	7850	8044	8315	8648
4085	5255	6025	6450	7023	7494	7860	8054	8325	8658
4095	5265	6035	6460	7033	7504	7870	8064	8335	8668
4105	5275	6045	6470	7043	7514	7880	8074	8345	8678
4115	5285	6055	6480	7053	7524	7890	8084	8355	8688
4125	5295	6065	6490	7063	7534	7900	8094	8365	8698
4135	5305	6075	6500	7073	7544	7910	8104	8375	8708
4145	5315	6085	6510	7083	7554	7920	8114	8385	8718
4155	5325	6095	6520	7093	7564	7930	8124	8395	8728
4165	5335	6105	6530	7103	7574	7940	8134	8405	8738
4175	5345	6115	6540	7113	7584	7950	8144	8415	8748
4185	5355	6125	6550	7123	7594	7960	8154	8425	8758
4195	5365	6135	6560	7133	7604	7970	8164	8435	8768
4205	5375	6145	6570	7143	7614	7980	8174	8445	8778
4215	5385	6155	6580	7153	7624	7990	8184	8455	8788
4225	5395	6165	6590	7163	7634	8000	8194	8465	8798
4235	5405	6175	6600	7173	7644	8010	8204	8475	8808
4245	5415	6185	6610	7183	7654	8020	8214	8485	8818
4255	5425	6195	6620	7193	7664	8030	8224	8495	8828
4265	5435	6205	6630	7203	7674	8040	8234	8505	8838
4275	5445	6215	6640	7213	7684	8050	8244	8515	8848
4285	5455	6225	6650	7223	7694	8060	8254	8525	8858
4295	5465	6235	6660	7233	7704	8070	8264	8535	8868
4305	5475	6245	6670	7243	7714	8080	8274	8545	8878
4315	5485	6255	6680	7253	7724	8090	8284	8555	8888
4325	5495	6265	6690	7263	7734	8100	8294	8565	8898
4335	5505	6275	6700	7273	7744	8110	8304	8575	8908
4345	5515	6285	6710	7283	7754	8120	8314	8585	8918
4355	5525	6295	6720	7293	7764	8130	8324	8595	8928
4365	5535	6305	6730	7303	7774	8140	8334	8605	8938
4375	5545	6315	6740	7313	7784	8150	8344	8615	8948
4385	5555	6325	6750	7323	7794	8160	8354	8625	8958
4395	5565	6335	6760	7333	7804	8170	8364	8635	8968
4405	5575	6345	6770	7343	7814	8180	8374	8645	8978
4415	5585	6355	6780	7353	7824	8190	8384	8655	8988
4425	5595	6365	6790	7363	7834	8200	8394	8665	8998
4435	5605	6375	6800	7373	7844	8210	8404	8675	9008
4445	5615	6385	6810	7383	7854	8220	8414	8685	9018
4455	5625	6395	6820	7393	7864	8230	8424	8695	9028
4465	5635	6405	6830	7403	7874	8240	8434	8705	9038
4475	5645	6415	6840	7413	7884	8250	8444	8715	9048
4485	5655	6425	6850	7423	7894	8260	8454	8725	9058
4495	5665	6435	6860	7433	7904	8270	8464	8735	9068
4505	5675	6445	6870	7443	7914	8280	8474	8745	9078
4515	5685	6455	6880	7453	7924	8290	8484	8755	9088
4525	5695	6465	6890	7463	7934	8300	8494	8765	9098
4535	5705	6475	6900	7473	7944	8310	8504	8775	9108
4545	5715	6485	6910	7483	7954	8320	8514	8785	9118
4555	5725	6495	6920	7493	7964	8330	8524	8795	9128
4565	5735	6505	6930	7503	7974	8340	8534	8805	9138
4575	5745	6515	6940	7513	7984	8350	8544	8815	9148
4585	5755	6525	6950	7523	7994	8360	8554	8825	9158
4595	5765	6535	6960	7533	8004	8370	8564	8835	9168
4605	5775	6545	6970	7543	8014	8380	8574	8845	9178
4615	5785	6555	6980	7553	8024	8390	8584	8855	9188
4625	5795	6565	6990	7563	8034	8400	8594	8865	9198
4635	5805	6575	7000	7573	8044	8410	8604	8875	9208
4645	5815	6585	7010	7583	8054	8420	8614	8885	9218
4655	5825	6595	7020	7593	8064	8430	8624	8895	9228
4665	5835	6605	7030	7603	8074	8440	8634	8905	9238
4675	5845	6615	7040	7613	8084	8450	8644	8915	9248
4685	5855	6625	7050	7623	8094	8460	8654	8925	9258
4695	5865	6635	7060	7633	8104	8470	8664	8935	9268
4705	5875	6645	7070	7643	8114	8480	8674	8945	9278
4715	5885	6655	7080	7653	8124	8490	8684	8955	9288
4725	5895	6665	7090	7663	8134	8500	8694	8965	9298
4735	5905	6675	7100	7673	8144	8510	8704	8975	9308
4745	5915	6685	7110	7683	8154	8520	8714	8985	9318
4755	5925	6695	7120	7693	8164	8530	8724	8995	9328
4765	5935	6705	7130	7703	8174	8540	8734	9005	9338
4775	5945	6715	7140	7713	8184	8550	8744	9015	9348
4785	5955	6725	7150	7723	8194	8560	8754	9025	9358
4795	5965	6735	7160	7733	8204	8570	8764	9035	9368
4805	5975	6745	7170	7743	8214	8580	8774	9045	9378
4815	5985	6755	7180	7753	8224	8590	8784	9055	9388
4825	5995	6765	7190	7763	8234	8600	8794	9065	9398
4835	6005	6775	7200	7773	8244	8610	8804	9075	9408
4845	6015	6785	7210	7783	8254	8620	8814	9085	9418
4855	6025	6795	7220	7793	8264	8630	8824	9095	9428
4865	6035	6805	7230	7803	8274	8640	8834	9105	9438
4875	6045	6815	7240	7813	8284	8650	8844	9115	9448
4885	6055	6825	7250	7823	8294	8660	8854	9125	9458
4895	6065	6835	7260	7833	8304	8670	8864	9135	9468
4905	6075	6845	7270	7843	8314	8680	8874	9145	9478
4915	6085	6855	7280	7853	8324	8690	8884	9155	9488
4925	6095	6865	7290	7863	8334	8700	8894	9165	9498
4935	6105	6875	7300	7873	8344	8710	8904	9175	9508
4945	6115	6885	7310	7883	8354	8720	8914	9185	9518
4955	6125	6895	7320	7893	8364	8730	8924	9195	9528
4965	6135	6905	7330	7903	8374	8740	8934	9205	9538
4975	6145	6915	7340	7913	8384	8750	8944	9215	9548
4985	6155	6925	7350	7923	8394	8760	8954	9225	9558
4995	6165	6935	7360	7933	8404	8770	8964	9235	9568
5005	6175	6945	7370	7943	8414	8780	8974	9245	9578
5015	6185	6955	7380	7953	8424	8790	8984	9255	9588
5025	6195	6965	7390	7963	8434	8800	8994	9265	9598
5035	6205	6975	7400	7973	8444	8810	9004	9275	9608
5045	6215	6985	7410	7983	8454	8820	9014	9285	9618
5055	6225	6995	7420	7993	8464	8830	9024	9295	9628
5065	6235	7005	7430	8003	8474	8840	9034	9305	9638
5075	6245	7015	7440	8013	8484	8850	9044	9315	9648
5085	6255	7025	7450	8023	8494	8860	9054	9325	9658
5095	6265	7035	7460	8033	8504	8870	9064	9335	9668
5105	6275	7045	7470	8043	8514	8880	9074	9345	9678
5115	6285	7055	7480	8053	8524	8890	9084	9355	9688
5125	6295	7065	7490	8063	8534	8900	9094	9365	9698
5135	6305	7075	7500	8073	8544	8910	9104	9375	9708
5145	6315	7085	7510	8083	8554	8920	9114	9385	9718
5155	6325	7095	7520	8093	8564	8930	9124	9395	9728

**GOVT.
STOCK
FT-243
79¢
FUND. FREQ.**

FT-243—From 1005-2999. Steps of 5 KC ea. \$2.39

SPECIAL ITEMS

FT-241 55B Matched Pairs Pr. \$1.95

FT-241 55B Low Freq. X'tals—370 to 540 KC 59¢

AN/TRC-1 FT-241 holders. 729 to 999 KC 75¢

1001 to 1040 KC 75¢

100 KC Marker Std. ea. 4.95

FT-241 200 KC or 500 KC ea. 1.00

DC-34/35 1690 to 4440 KC. Steps of 10 KC 79¢

Marine & C.A.P.—All Freq. Available
2009—2182—2637 etc. Tol. .005% ea. \$2.99

SEND FOR CATALOG — SE HABLE ESPAÑOL

Include 5¢ per crystal for postage (U.S. Only) Calif. add 4% Tax. No. C.O.D.'S. Prices subject to

**AGAIN
AVAILABLE
AT**

HARVEY RADIO

TOROID LOW PASS FILTER

Low pass audio filter that contains 5 Toroidal coils in an L/C network — Pass band 300 to 2,500 cps $\pm$ 3 DB — Extremely sharp cut off at 3,200 cycles — Impedance 600 ohm in and out...

Weights 3.6 lbs.
Dimensions: $3\frac{3}{8}$ " x $3\frac{3}{8}$ " x 5"



- ▶ **Handle up to 25 to 30 watts of audio**
- ▶ **No maintenance**
- ▶ **Better than a Speech Clipper**

**AN UNBEATABLE
VALUE!
WORTH TWICE
THE PRICE**

You can put it to use in so many ways—

- ★ In single side band applications
- ★ In 500 ohm line from speech driver to modulator
- ★ In 500 ohm receiver output
- ★ As a telephone line filter for broadcast stations

**ONLY
\$9.95**

F.O.B. New York

Take advantage of this sensational below manufacturer's cost offer. It's the buy of a lifetime you can't afford to miss. Order by mail today.

Send check
or money order
Inclusive of
shipping charges
to


**HARVEY RADIO
CO., INC.**

103 West 43rd Street, New York 36, New York

For further information, check number 27 on page 126.

February, 1960 • CQ • 97

1551 pages

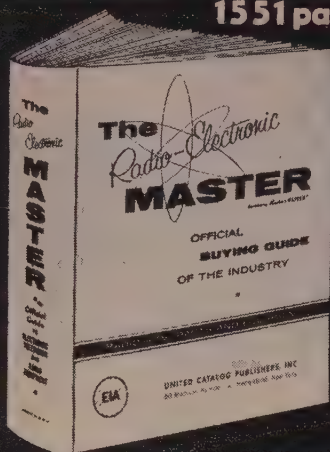

World's LARGEST Electronic Catalog

\$3.50

at parts distributors
\$4.50 in Canada

1960 RADIO-ELECTRONIC MASTER

now available at your distributor

**NEW...STREAMLINED...28 EASY-TO-USE PRODUCT SECTIONS
COVER ALL LATEST PRODUCTS**

- 1551 pages • 175,000 radio—TV—audio—electronic items
- descriptions, specs, illustrations, prices
- new citizen's band SSB and mobile ham gear • remote control radio equipment • components and equipment for microwave and telemetering • stereo equipment • miniature and sub-miniature components • new transistor types • plus every new electronic product for experimenting, design and maintenance.

SAVES TIME AND MONEY FOR AMATEURS

When you buy, repair or assemble, you're sure to get the right product to do the job because you're shopping in the electronic supermarket—The MASTER. Shows complete descriptions, specs, illustrations and prices of 175,000 products including many hard-to-locate items not usually found in smaller incomplete catalogs.

*No matter what ham gear or components you require...
You'll find it faster in the 1960 MASTER.*

FREE FROM YOUR DISTRIBUTOR—valuable Foreign Tube Interchangeability Guide, or write direct enclosing 25¢.



RADIO-ELECTRONIC MASTER
60-Q Madison Avenue
Hempstead, N.Y.

Enclosed is \$..... to cover:

- ☐ 1960 Radio-Electronic MASTER @ \$3.50
- ☐ 24-page Foreign Tube Interchangeability Guide @ 25¢ (free with order)

☐ Name of nearest MASTER distributor

Name.....
Company.....
Address.....
City.....Zone.....State.....

In Stock . . . for Immediate Delivery . . .

GLOBE'S

VHF HI-BANDER 6 & 2



Here's a complete, band-switching transmitter for 6 and 2 meters, 60w CW, 55w AM fone. 52-72 ohm coaxial output matches all beams and most doublets. Has variable antenna loading control. Uses regulated screen supply. Four stage RF section, all metered, allows straight through operation. Harmonic and TVI suppression. Reserve power for accessory operation from chassis rear socket (VFO, speech clipper, relay, etc.). Provisions for antenna changeover relay. Suitable for mobile use; provisions for plug-in power supply. New duo-band final tank circuit eliminates switching and increases efficiency.

Kit:


\$119.95

Wired:

\$149.95

GLOBE'S VFO 6-2

Especially designed for driving the Hi-Bander and similar 6 & 2 transmitters. King size 7" tuning scale. Perfect zero beat with exclusive bandsread control . . . Built-in, well-filtered power supply with voltage regulation. Completely temperature compensated. Calibrate switch for zero beating signal frequency without turning on transmitter. Approx. 50V RF output. Plugs directly into Crystal socket of Xmtr. 13:1 tuning ratio. Wired: \$59.95. In kit form: \$49.95.



SPEECH BOOSTER FCL-1

Peak limiting audio preamplifier for use with the Hi-Bander, that clips and filters speech frequencies at pre-set amplitudes. 300-25000 cycle response. Harmonic suppression helps reduce distortion. Plugs directly into Hi-Bander. Aux. ept. socket for operation of VFO. Wired: \$24.95. In kit form: \$15.95.



ALMO RADIO CO.

Stores

913 ARCH STREET
Philadelphia 7, Pa.
WAlnut 2-5918

WEST PHILADELPHIA
6205 MARKET STREET
Philadelphia 39, Pa.
GRanite 6-1706

NORTHEAST PHILADELPHIA
7540 FRANKFORD AVE.
Philadelphia 36, Pa.
DEVonshire 2-2234

BURHOLME
5801 Rising Sun Ave.
Philadelphia, Pa.
FI 2-3556

TRADE-IN ALLOWANCES

THE EXCITING NEW GLOBE SCOUT DELUXE



The Globe Scout Deluxe is a versatile 90w CW, 75w fone transmitter of smart modern design, packed with top performance features . . . Band-switching 80-6 meters, straight through operation of final on ALL bands; high efficiency and output on ALL bands, panel adjustment of loading on ALL bands. Pi-net matches 50-300 ohms on 80-10, and 50-75 ohms link output on 6 meters. High level plate modulation using new husky 7027A modulator tube. Just plug in VFO or crystal. Dual Xmtr./VFO keying provisions for CW. More output on 6 meters than some exciter linear combinations. Extensively shielded and filtered with separate final RF shield. Built-in power supply and many other features.

Wired Only:

\$149.95

THE EXCITING NEW

GLOBE CHIEF DELUXE



Kit:


\$59.95

Wired:

\$79.95

The Globe Chief Deluxe is a top quality, self-contained transmitter for 90w CW use, band-switching 10-80M (75w meter indication for Novice use). Convert to phone by simple plug-in of UM-1 or SM-90. Provisions for antenna changeover relay. Choice of grid block keying or cathode keying with VFO. Built-in power supply. New wide range pi-net. Standard coax antenna fitting. Simplified 3-color diagrams for ease in kit construction.

For further information, check number 28 on page 126.



CITIZEN BAND CLASS "D" CRYSTALS

All 22 Frequencies in Stock

3rd overtone, .005% tolerance to meet all FCC requirements. Hermetically sealed HCB/U holders, 1/2" pin spacing, .050 pins, .05" pins available, add 15¢ per crystal. Add 5¢ per crystal for postage and handling.

**\$2.95
EACH**

The following Class "D" Citizen Band frequencies in stock (frequencies listed in megacycles): 26.965, 26.975, 26.985, 27.005, 27.015, 27.025, 27.035, 27.055, 27.065, 27.075, 27.085, 27.105, 27.115, 27.125, 27.135, 27.155, 27.165, 27.175, 27.185, 27.205, 27.215, 27.225.

Matched crystal sets for Globe, Gonset, Citi-Fone and Halli-crafters Units . . . \$5.90 per set. Specify equipment make.

RADIO CONTROL CRYSTALS IN HC6/U HOLDERS

Specify frequency, 1/2" pin spacing . . . pin diameter .05 (.093 pin diameter, add 15¢) . . . \$2.95 ea.

FUNDAMENTAL FREQ. SEALED CRYSTALS

In HC6/U holders
From 1400 KC to 4000 KC .005% Tolerance . . . \$4.95 ea.
From 4000 KC to 15,000 KC any frequency . . . \$3.50 ea.
.005% Tolerance

SEALED OVERTONE CRYSTALS

Supplied in metal HC6/U holders
Pin spacing, .480, diameter .050
15 to 30 MC .005 Tolerance . . . \$3.85 ea.
30 to 45 MC .005 Tolerance . . . \$4.10 ea.
45 to 60 MC .005 Tolerance . . . \$4.50 ea.

QUARTZ CRYSTALS FOR EVERY SERVICE

All crystals made from Grade "A" imported quartz—ground and etched to exact frequencies. Unconditionally guaranteed! Supplied in:

FT-243 holders Pin spacing 1/2" Pin diameter .093	MC-7 holders Pin spacing 3/4" Pin diameter .125
DC-34 holders Pin spacing 3/4" Pin diameter .156	FT-171 holders Pin spacing 3/4" Banana pins

MADE TO ORDER CRYSTALS

1001 KC to 2600 KC:

.01% tolerance	\$2.00 ea.
.005% tolerance	\$2.75 ea.
2601 KC to 9000 KC:	
.005% tolerance	\$2.50 ea.
.005% tolerance	\$3.00 ea.

Specify holder wanted

Amateur, Novice, Technician Band Crystals

.01% Tolerance . . . \$1.50 ea.—80 meters (3701-3749 KC), 40 meters (7152-7198 KC), 15 meters (7034-7082 KC), 6 meters (8833-8850 KC) within 1 KC
FT-241 Lattice Crystals in all frequencies from 370 KC to 540 KC (all except 455 KC and 500 KC) . . . 50¢ ea.
Pin spacing 1/2" Pin diameter .093
Matched pairs ± 15 cycles \$2.50 per pair
200 KC Crystals, \$2.00 ea.; 455 KC Crystals, \$1.50 ea.; 500 KC Crystals, \$1.50 ea.; 100 KC Frequency Standard Crystals in HC6/U holders \$4.50 ea.; Socket for FT-243 crystal 15¢ ea.; Dual socket for FT-243 crystals, 15¢ ea.; Sockets for MC-7 and FT-171 crystals 25¢ ea.; Ceramic socket for HC6/U crystals 20¢ ea.

(Add 5¢ per crystal for postage and handling)

Write for free catalog complete with oscillator circuits

ASK YOUR PARTS DEALER FOR TEXAS CRYSTALS
See big red display . . . if he doesn't stock them, send us his name and order direct from nearest factory.

OUR NEW FLORIDA PLANT NOW OPERATING— Send orders to our nearest location!

TEXAS CRYSTALS

Texas Crystals, Dept. C-20 8538 W. Grand Ave. River Grove, Ill. Phone: GL 3-3555	OR	Texas Crystals, Dept. C-20 1000 Crystal Drive Ft. Myers, Florida Phone: WE 6-2100
---	----	--

ATTACH THIS COUPON TO YOUR ORDER FOR SHIPMENT VIA 1ST CLASS MAIL AT NO EXTRA COST

TERMS: All items subject to prior sale and change of price without notice. All crystal orders must be accompanied by check, cash or M.O. with PAYMENT IN FULL. No COD's. Add 5¢ per crystal for postage and handling charge, Dept. C-20.

February is Cold

and we need the warmth of knowing you care. Here we've gone to a lot of trouble to work up a selection of books that you really ought to have and you go and put off sending for them month after month. Send cash, check or money order real quick and get your ham library in shape. Money back if you're not satisfied.

1. Electronics & Radio Engineering, Terman . . . \$14.50
One of the most complete text books ever printed, 1078 pages. Theory, but easy on the math.
2. E.E. Handbook by Mellwin . . . \$10.00
Formulas, tables, circuits, a real handbook, 1618 pages.
3. Antennas by Kraus (W8JK) . . . \$11.50
The most complete book on antennas in print, but largely design and theory complete with the math.
4. So You Want To Be A Ham, W2DJJ . . . \$2.50
What you need to know to get a license.
5. S.W. Radio & Ionosphere . . . \$2.75
Highly recommended by George Jacobs.
6. RTTY Handbook by W2JTP . . . \$3.00
A-Z of ham teletype, supply low, very popular.
7. VHF Handbook by W6BKA . . . \$2.95
Covers just about every aspect of VHF.
8. Beam Antenna Handbook by W6SAI . . . \$2.70
Practical, includes both theory and construction.
9. Novice Handbook by W6TNS . . . \$2.85
Receiver, transmitter and antenna theory and construction for the Novice and Technician. Terrific.
10. Better Shortwave Reception by W6SAI . . . \$2.85
Fine handbook for SWling, long needed.
11. Surplus Radio Conversion Manual I . . . \$2.50
B-231, B-312, 348, 412, 645, 946, 1068A, SCR-274, 522, TBY, PE-103, etc.
12. Surplus Radio Conversion Manual II . . . \$2.50
BC-451-459 Xmttr-Rcvrs; APS 13; ARC-5 VHF Xmttr-Rcvrs; BC-357; 946B; 375; TA-12B; ART-13; AVT-112A; GO-9; LM; etc.
13. Television Interference, WIDBM . . . \$1.75
Really up-to-date on every TVI problem and cure.
14. RCA Radiotron Designers Handbook . . . \$7.50
1500 pages of design notes on every possible type of circuit. Fabulous. Every design engineer needs it.
15. CQ's Mobile Handbook, W6SAI . . . \$2.95
Invaluable. Receiver & Xmttr construction, installation, noise reduction, antennas, regular adjustment, etc.
16. Command Sets by CQ . . . \$1.50
A whole book full of conversions of the SCR-274N surplus "Command Sets". BC-451-5-6-7-8-9 etc.
17. CQ's New Sideband Handbook, W6TNS . . . \$3.00
Dozens of build-it circuits, all new material, not just reprints. Wonderful book.
18. 15th Ed. Radio Handbook by W6SAI . . . \$7.50
This is the BEST amateur radio handbook ever published, over 800 pages.
19. CQ's Anthology . . . \$2.00
The best of CQ from 1945-52. Reprints of top articles from out-of-print back issues.
20. Curta Computer, world's smallest, (send for info) . . . \$125
21. Practical Electronics, W2DJJ . . . \$2.50
Lavishly illustrated introduction to just about every phase of electronics. Interesting to all, instructive to beginners. Great to have around the shack for visitors.
22. Basic Electronics . . . \$9.25
Covers subject completely. Written for use with RCA Institute training course.
23. Electronic Communication by Shrader . . . \$13.00
Huge book aimed at giving all information necessary for FCC commercial & amateur licenses.
24. Microminaturization . . . \$11.00
The first book on the subject. Don't see how a lab or manufacturer can be without this book. Everything is going to have to be built smaller, you know.
25. Surplus Handbook . . . \$3.00
A/N, APS, ARB, ARC-5, ARN, ARR, ASB, BC-222, 312, 314, 342, 344, 348, 603, 621, 624, 652, 654, 659, 669, 683, 728, 745, 764, 779, 794, 925, 1000, 1004, 1066, 1206, 1306, 1335, AR-231, CRT, DAK3, GF11, MARK II, MN26, RAK, RAL, RAX, TBY, TCBS, VT/JAN tube index. Schematics & photos.
26. How to Read Schematic Diagrams . . . \$3.50
Recommended by Ham Clinic May '59, page 95.
27. Basic Electronic Test Procedures . . . \$6.50
Test equipment: how it works, how to use it.
28. Ham Radio Handbook by W2DJJ . . . \$2.50
Picture introduction to ham radio and complete guide to commercially available ham equipment.
29. Transistor Circuit Handbook . . . \$4.95
Simple, easy to understand explanation of transistor circuits. Dozens of interesting applications. Recommended by Ham Clinic, p. 84, Aug. '59 CQ.
30. Radio Telephone License . . . \$5.00
Brand new Q&A study guide by W6BCX, top notch.
31. Quad Antennas by W6SAI . . . \$2.85
Hot new book on a hot topic by the expert.
32. Antennas for Citizens Radio . . . \$1.00
33. CQ's New License Guide, K2IEG . . . \$2.50
Novice, Technician, General, and Extra licenses plus lots of other valuable info.
34. CQ's Surplus Schematics Handbook, W2HDM . . . \$2.50
Schematic diagram and brief construction notes on just about every piece of surplus out. Just out.

N. Y. C.'ers add 3% Sales Tax.

Radio Bookshop

1379 East 15th St., Brooklyn 30, N. Y.

For further information, check number 29 on page 126.



ME? OFF FREQUENCY? NEVER! I TRANSCEIVE... WITH A P&H VFO-MATIC



No foolin'—This character is right. With the VFO-MATIC your 75A2, A3, A4 or Drake 1A receiver simply takes over frequency control of the transmitter. May be used on such exciters as the 10B, 20A, HT-32, Gonset, Phasemaster or other 9 MC types.

The VFO-MATIC is a xtal mixing unit having one adaptor which simply plugs into a receiver tube socket and a second adaptor which plugs into a tube socket of the exciter. Calibration and sideband switching are not affected in any way.

Like SSB—TRANSCIVING IS HERE TO STAY. If you are interested, drop a card or letter to Dept. 13C for information on using a VFO-MATIC on your particular receiver-exciter combination.

VFO-MATIC complete, ready to operate, with xtals, adaptors, cables for your particular lashup.

Price.....\$142.95

ATTENTION—75A-4, KWS-1 OWNERS! There's
a SPECIAL model VFO-MATIC FOR YOU,
All bands except ten.

OTHER FINE P&H GEAR

600A . . . 6 meter transmitting converter
L600M and L200M Hi-Power VHF Linears
AFC-1 AFC-2 Audio compressor-Amplifiers
LA-400-C Linear Amplifier. 160-6 RF Choke.

P & H ELECTRONICS INC.
424 Columbia Lafayette, Ind.

For further information, check number 30 on page 126.

NEW MULTI- ELMAC



PRICE
(Amateur Net)
\$205.00

Including all tubes
and 15 prong power
connector

Cabinet Size—13¼" Wide—6¼"
High—7½" Deep
(Exclusive of Knobs)
Weight—18 lbs. (Approx.)

AF-68 TRANSCITER

TYPE A-1 OR A-3 EMISSION

Six Amateur Bands

80 THRU 6 METERS

V.F.O. or CRYSTAL

A built-in temperature compensated V.F.O. is directly calibrated in megacycles for each band.

A Universal PI Matching network for a wide variety of impedance matching. Provisions for 40 watts of audio at 500 ohms to drive higher power modulators.

A five Circuit meter switch provides illuminated meter readings.

The AF-68 can be operated from 6, 12 V. D.C. or 110 V. A.C. High voltage requirements for maximum input of 60 watts are 500 volts @ 170 M.A. and 225 volts @ 60 M.A.

Finish—Charcoal cabinet with chrome trim. Two-tone grey front panel.

MULTI-PRODUCTS COMPANY
21470 COOLIDGE HWY., OAK PARK 37, MICHIGAN

For further information, check number 31 on page 126.

THE HAM SHOP

19" GLOBE

Here is a chance to preserve your breath for posterity! This beautiful World Globe, made by Hammond, is a must for every hamshack. Plain for \$19.95 or lighted for \$24.95. The first 10,000 people who jump at this bargain will get a year of CQ at no extra charge.



ATLAS

What! You don't know where Nicobar Island is? Incredible! And with the CQ deal on the Hammond Atlas so reasonable too. This is a reference book that will get good usage around your house if you have any kids. 7 lbs. of colored maps and a gazetteer for only \$12.50... and you get a year of CQ.



COMMAND SETS

This IS a collection of reprints containing all of the available information on the conversion of the popular "Command" transmitters and receivers into good ham transmitters and receivers. Invaluable for Novice, Technician, General, Advanced and Extra class operators. 136 fabulous, amazing terrific pages for only \$1.50 postpaid.




MOBILE HANDBOOK

Anyone who tries to go mobile without getting this book should register for a sanity hearing. Bill Orr, W6SAI has put everything you need to know in this book...it is NOT a collection of reprints like some other mobile handbooks we could mention. Build-its by the dozen...solutions to ignition problems, keeping the battery charged, noise...only \$2.95 postpaid.

CODE RECORD

Learning code is a snap with this record. Speeds from 3 to 16 WPM, depending upon turntable speed. This 12" LP record has on it all you need to learn the code for both the Novice and General License. \$3.50 each.

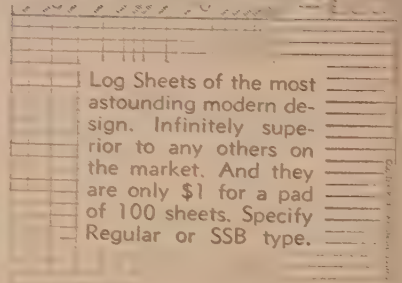


Log Sheets of the most astounding modern design. Infinitely superior to any others on the market. And they are only \$1 for a pad of 100 sheets. Specify Regular or SSB type.

ELEKTRA CODE COURSE




HAM'S INTERPRETER

Now you can talk in broken French, Spanish, Italian, German, Swedish and Finnish. This handy little book gives all the popular ham conversation in seven languages, including letters and numbers. Only \$1.50 postpaid.




TVI HANDBOOK

WIDM's newly written TVI book (2nd edition) covers all aspects of curing TVI from both the Ham's viewpoint and that of the TV viewer or the TV serviceman. It includes 2- and 6-meter TVI as well as Citizen's Band, Industrial, Medical and Utility TVI. Profusely illustrated with diagrams, photos, charts, tables and FCC regulations pertaining to radio and television interference. Price \$1.75 postpaid, USA, \$2.00 Foreign.



BINDER


There is no other good way to keep your back issues. Make 'em neat. We supply the binder, with the year embossed in gold, not merely a sticker which will come off later. Specify what year you want stamped on your binder. \$3.50 each.



BOUND VOLUME

By far the handiest way to keep your library. Why not go first-class? This impressive volume is only \$10.00. We only made a few of them this year, so don't expect to get one later.






CQ ANTHOLOGY

Most amateurs do not have a good file of back issues of CQ. So we've looked back through the years 1945-52 and assembled all in one place the articles that have made a lasting stir. The issues containing most of these articles have long ago been sold out. The price is a paltry \$2.00.

ALL ABOUT MISSILES & SATELLITES

Here's a book, written in down-to-earth language, which answers questions on missile maintenance, fire control, flight control tracking, testing, fuels, payload and many other achievements in rocketry and space for both scientific and military applications. Also, featuring the most up-to-date "Directory of 38 Most Popular Missiles and Their Photos," (supplied by Department of Defense) as well as a "Glossary of Missile Terms." \$1.50 per copy.

ALL ABOUT MISSILES and SATELLITES



SERVICE DEALER & ELECTRONIC SERVICING

Television SCHEMATICS and SERVICE GUIDE


Including: Alignment Data, Waveforms, Tube Location Guide, Operating Voltages, Essential Parts Numbers, etc.

TV SCHEMATIC PACKET

96 pages of 45 representative TV schematics, covering the most prominent TV manufacturers. Factory authorized, crystal clear and accurate. \$3.00

HI-FI BOOK

This nifty volume contains the latest dope on amplifiers, preamplifiers and equalizers plus a buyer's guide of component manufacturers! Over 150 — 5½" x 8½" pages of heavily illustrated descriptions covering Hi Fi Audio Components—the greatest publication value in its field today. Only \$2.50 per copy.



SIDEBAND HANDBOOK

Written by Don Stoner, W6TNS, was almost one full year in the preparation of this terrific volume. This is not a technical book. It explains sideband, showing you how to get along with it... how to keep your rig working right... how to know when it isn't... and lots of how to build-it stuff, gadgets, receiving adaptors, exciters, amplifiers. Price, only \$3.00.

Sideband

Theory
Operation
Construction



COWAN PUBLISHING CORP.

Book Division
300 West 43rd Street
New York 36, N. Y.

LIGHTED GLOBE	\$24.95	☐
UNLIGHTED GLOBE	19.95	☐
ATLAS	12.50	☐
COMMAND SETS	1.50	☐
MOBILE HANDBOOK	2.95	☐
CODE RECORD	3.50	☐
REGULAR LOG SHEETS (100).....	1.00	☐
SSB LOG SHEETS (100)	1.00	☐
HAM'S INTERPRETER	1.50	☐
TVI HANDBOOK	1.75	☐
BINDER—YEAR WANTED	3.50	☐
BOUND VOLUME	10.00	☐
CQ ANTHOLOGY	2.00	☐
MISSILES & SATELLITES	1.50	☐
TV SCHEMATICS	3.00	☐
HI-FI BOOK	2.50	☐
SIDEBAND HANDBOOK	3.00	☐

SIRS: My check (money order) for \$_____ is enclosed. Please send the following items to:

Name _____

Address _____

City _____ Zone _____ State _____

New York City Residents Add 3% Sales Tax

from the RIDER Bookshelf for
more successful ham operation

SHORTWAVE PROPAGATION by Stanley Leinwoll (Radio Frequency and Propagation Mgr.—Radio Free Europe). Of special interest to those concerned with radio communications, this text provides a modern, up-to-the-minute analysis of shortwave propagation. Ionosphere characteristics are discussed together with the nature of radio waves. The book then carries the reader into the sky wave, measuring the ionosphere, ionospheric variations, the sunspot cycle, and abnormal phenomenon. Sky wave propagations are covered and the preparation of MUF curves are discussed. Includes Rider Global Time Conversion Chart. #231, \$3.90.

RIDER GLOBAL TIME CONVERSION SIMPLIFIER by Lt. Col. John G. Daiger (Ret'd). What time is it in Oslo? In New Delhi? In San Francisco? In Rio de Janeiro? No matter where you are located you can tell at a glance what time it is anywhere in the world with the greatest of ease. It lists small towns and large cities around the world; large cities and small towns in the United States. It is color-keyed to tell you immediately the correct day. Corrects for areas that have Daylight Savings Time. Has conversion tables for those who use 24-hour calculated system. Ideal for communications personnel, airlines, banks, travel bureaus and travellers. Just a few minutes acquaints you with the easy-to-use, colorful chart and map and makes it usable to anyone. #238, \$1.



learn code
faster, easier
than ever
before

RIDER SOUND-N-SIGHT CODE COURSE

by Lewis Robins & Reed Harris

- applies Reinforced Learning—psychological principle proved successful by Armed Forces.
- uses LP records to teach you to hear signal pattern correctly and identify it—how to transmit.
- uses identification cards to teach you the correct letter associated with each signal pattern.
- uses instruction book to speed your progress.

... plus an imaginary instructor (in complete and novice courses) provides correct answers to speed code learning. Many people have learned to receive 5 words per minute within 9½ hours. Eliminates code plateau barrier!

3 INDIVIDUAL COURSES—THERE'S ONE FOR YOU
COMPLETE COURSE (0-20 words per minute) — Six 10" LP records (192 minutes of recording, 28 recordings), 47 ident. cards, book #REC-020, \$15.95.

NOVICE COURSE (0-8 words per minute) — Three 10" LP records (96 minutes of recording, 28 recordings), 47 identification cards, book. #REC-08, \$9.50.

ADVANCED COURSE (9-20 words per minute) — Three 10" LP records (96 minutes of recording, 28 recordings), book. #REC-920, \$8.95.

Records prepared in collaboration with the N. Y. Institute of Technology and mfd. by Decca Records.

GET YOUR COMMERCIAL TICKET EASIER WITH...

Kaufman's
RADIO OPERATOR'S LICENSE
Q AND A MANUAL

Now available 6th edition
up to the minute

The BEST book for FCC
License Preparation

Covers elements 1 thru 8.

The only book with complete
discussion of answers to every
technical question in the FCC Study Guide.
Makes it very easy to answer multiple choice
questions.

Used by leading schools and industry. Only \$6.60



6th EDITION

JOHN F. RIDER PUBLISHER, INC.

116 West 14th Street, New York 11, N. Y.

2 M. ANT. [from page 57]

clothes line (wire) is then fitted into the coax coupling through center of ⅝" tubing. (The wire fits snugly in center of coupling.)

5. The insulator made in step 2 is now passed over the wire and fitted in the top of the ⅝" tubing.

6. The 1¼" I.D. x 19¼" length of tubing is drilled and tapped ¼" from one end to receive four 10/32 screws.

7. Insert the four 10/32 screws. These should be at least ½" long.

8. This tube is then slipped over the smaller tube assembly and the screws tightened. It will be necessary to sight center the two tubes so inner tube is close to exact center as shown in the photographs.

9. Mount the assembly on transmitter and you are in business.

75A-2 [from page 63]

the calibration signal as before in the AM position with the selectivity on "2". Switch to CW and turn the pitch control toward the "—1" position, about one third of the way. You should now be hearing a single audio tone of about 400 cps. Tune the receiver higher in frequency (which will make the audio tone go lower) past zero beat until you hear the same 400 cps pitch on the other side of zero beat. The kilocycle dial scale should have moved a little less than one kc during this operation. With the phasing control reject this 400 cps tone now coming from the speaker. Now the tricky part. Adjust the bfo pitch for zero beat. This is difficult because you have just eliminated the signal you are supposed to zero beat! However, you can bring it in for this last operation by moving the phasing control slightly. Be sure to put the phasing control back where it was after you finish zero beating. Now the receiver is set up. The bfo pitch control should be near the "—1" position and the phasing should be a little to the right of the center mark.

Try tuning in an AM signal now. Tune to zero beat the carrier. As the carrier approaches zero beat it falls into the rejection notch of the crystal filter and is eliminated. AM signals now tune like SSB signals. To make sure you have the phasing control in the right position, momentarily switch to AM after you have an AM signal tuned to zero beat. It should sound very distorted. If not, adjust the phasing control slightly until severe distortion results. Then when you switch the receiver to cw, it will sound normal. Slight readjustment of the bfo pitch may be necessary.

For frequency reading, follow the same procedure as with SSB.

The "DUAL D" by LAKESHORE

* Receive on Fixed Frequency Crystal Controlled Receiving Channel

or

* Receive on any of 23 Channels with variable Frequency receiver.

* Transmit on either of 2 preselected Channels. Covers all Channels with proper Crystals.

* Push to talk operation with Control button on Microphone

* Squelch Control Mutes receiver for Stand-by operation

* Automatic noise Limiter


* Power input 5 watts AM Modulated

* 11 tubes for top Performance

* Meets all F. C. C. Requirements

* No license Exam required — Any Citizen 18 years or older may obtain license by submitting Form 505 to F. C. C.

* May be used for Personal or Business purposes.

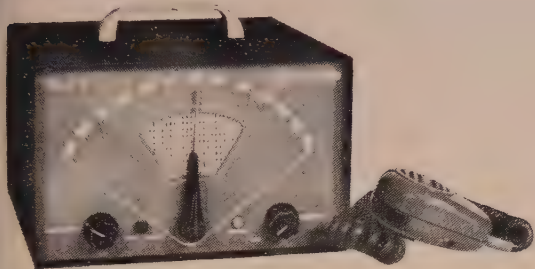

CLASS "D" CITIZENS BAND TWO-WAY RADIO

FOR PRICE AND MORE DETAILS WRITE TO
LAKESHORE INDUSTRIES




For further information, check number 33 on page 126.

Hams prefer

BOOM-MIKE HEADSETS

by TELEX®



Over and over again, Telex Boom-Mike Headsets are preferred by hams. Weighing only 3½ ounces, these headsets are strong and rugged. They are easy to slip on, simple to adjust and practically unnoticeable to wear. It always remains in the same position allowing you free movement and uniform transmission . . . ideal for mobile broadcasting.

Sound is transmitted directly into the ear through adjustable tone arms—no pressure

on ear from heavy cans. Background noises are blocked out. This permits ham operators to maintain continuous communications under even the most difficult conditions.

Choice of microphone to suit your particular transmitting conditions—Reluctance, Crystal Carbon or F.A.A. accepted Noise Cancelling Dynamic microphone.

Telex Boom-Mike Headsets have been proven in many fields, especially in ham operation. See your jobber NOW!



TELEX, INC.

ELECTRO-ACOUSTIC DIVISION
TELEX PARK, ST. PAUL 1, MINN.

For further information, check number 34 on page 126.

AN/ART-13 100-WATT TRANSMITTER

(Government original Cost \$1,000.00)

Designed to provide radio communication by voice, (MCW) or CW telegraphy. Class "B" audio modulator system capable of modulating the carrier at least 90% on voice or MCW. Incorporates automatic tuning mechanism which may be used to select any one of 11 frequencies, range 200 KC to 18,000 KC. Frequencies 200 KC to 1500 KC range is provided by addition of oscillator 0-16 ART-13-A. Shipping weight 90 pounds.

With Tubes and Meters—Condition Fair	\$29.50
Less Meters but with Tubes	\$20.00
Less Meters and Tubes (For spare parts only)	\$10.00
0-16 Low Frequency Oscillator	\$ 5.95

AN/ART-13-T47 with Tubes and Meters. \$39.50

Condition Good

T47 with Tubes and Meters. Condition \$49.50

Excellent

Write for Bargain Flyer

R W ELECTRONICS

2430 S. MICHIGAN AVENUE, DEPT CQ

Chicago 16, Illinois Phone: CAIumet 5-1281

BACK ISSUES FOR SALE

1950—Jan., July, Oct., Nov.
1951—All issues, except May, Nov., Dec.
1952—All issues, except Jan., Aug.
1953—All issues, except May, July, Dec.
1954—All issues, except Feb.
1955—All issues, except Nov.
1956—All issues, except April, July
1957—All issues, except Feb. and Nov.
1958—All issues, except July, Sept., Oct.
1959—All issues except Jan.

\$1.00 per copy

All Issues of the Current Year,
50¢ Per Copy
(NOV. ANNUAL ISSUE \$1.00)

CQ Magazine

300 West 43rd St., New York 36, N. Y.

LOOKING FOR SOMETHING?

Always look in CQ first for your Ham needs.

CQ—THE RADIO AMATEUR'S JOURNAL

NOVICE [from page 73]

novice bands. Merrill will sked anyone need Md. for WAS.

Once again that brings us down to the bottom of the pile. Be sure to keep those letters cards coming. If you would like help with your novice or general examination, don't hesitate to send your name in to the help wanted section. Last, but not least, how about some pictures of shack, particularly those listed in the

73.. de Don, W6T

CB [from page 85]

Pocket Size FSM

The Quaker Electronic Co., Plymouth, F let us try their new field strength meter. About the size of a king-size cigarette pack, it indicates, on a relative scale, power radiated by your antenna. No kit, it comes completely assembled. The unit is equipped with an SO-21 coax fitting so that it may be connected through a length of coax cable, to a reference antenna for comparative measurements. It can't be beat for indicating the merit of new antennas, as well as for keeping a check on the output efficiency of your transmitter. It is available in all-band models or for specific frequencies. Oh yes, it has its own antenna, also, which may be plugged directly into the coax fitting. A special model is available for citizen band users.

Transistor Rig For C/B

Though we've only seen a picture of it, we're just a little excited about a new rig from International Crystal. It looks like a printed circuit oscillator and amplifier. It would appear that all you need in addition would be a modulator. We'll try to get more info on this.

We've got so many things planned for next month, it's hard to see how it will fit in the column—another new rig and still another antenna are on the way.

Meanwhile, let's hear about any C/B problems you may have.

73, de Lee, W2QEX/2W287

PROP [from page 84]

period are reflected in the initial scores received. It looks very much as if the record breaking scores of the past few years will be in for some keen competition again.

During the CW period, from 0200 GMT November 28th through 0200 GMT November 30th, world-wide propagation conditions appeared to have been somewhat unsettled. Con

PAPPY" TAKES THE "PAIN" OUT OF PROJECTS

BOARD OF THE MONTH

It's easier to add than multiply—"Frequency Adder" consists of Balanced mixer using new 7360 and crystal oscillator. Circuitry on $4\frac{1}{2}$ " x 5" board, with sockets \$3.00 Each

Some of our new PETS:

Square Wave Generator—4" x $2\frac{1}{2}$ " board uses 2 2N170 transistors, space for 1.5 v battery \$1.50 Each

"S" Meter— $2\frac{1}{2}$ " square board, uses 12AU7, FB for that surplus receiver \$1.00 Each

"Power Supply"—4" x 7" Board provides circuitry for voltage doubler supply using diode rectifiers, provides 250 v. @ 60 Ma and 6.3 @ 2 amps.. \$1.50 Each

Kit consists of etched board, tube or transistor sockets, diagram, parts list and assembly instructions . . . Mailed postpaid anywhere in U.S.A.



IRVING ELECTRONICS CO.
P. O. Box 9222, San Antonio 4, Texas

Manufacturers inquiries invited on our printed circuit prototype and production service.



For further information, check number 36 on page 126.

Transpace—6 channel Citizens' Band radiophone



You get every top feature in a TRANSPACE — the set that gives you the full possibilities of Class "D."

Six-channel operation. Choose up to 6 channels, by means of an illuminated front panel selector. The dial is direct reading — no interpolation needed.

Three-way power supply — operates from 115 volts ac, 6 and 12 volts dc. Only one Transpace Model for car or home.

Maximum legal power — a full 3 watts RF output.

One-microvolt sensitivity for maximum reception . . . 37 db selectivity.

Full 100% modulation, plus automatic squelch and automatic noise limiter.

No retuning — the Transpace maintains full sensitivity and power output when you switch channels.

Rugged construction—withstands the roughest mobile use. Super-tough vinyl finish.

Immediate delivery from stock. Write for literature and name of local dealer.



INC., 12902 Foothill Boulevard • San Fernando, California

For further information, check number 37 on page 126.

While They Last!



INVERTERS

6V to 12V or 12V to 6V Synchronous. 15 Amps continuous or 50 Amps Int. Use any 12V equipment in 6V autos or 6V equipment in 12V autos.

ONLY

\$10.50
EACH



DYNA-MOTORS

12V Input, 500V output, 250 milliamperes or 27V input, 1000V output, 500 milliamperes Air-Cooled.

\$3.95

NOW ONLY EACH



4x150 A

GUARANTEED

6.3V Air-Cooled. May be used with full input to 500 Meg. Packed in plico film bag. 4X150 D also available at same low price! Sockets available with tube purchase, quantity limited, \$1.50 each.

\$7.50

ONLY EACH



LEAR MOTORS

10,500 RPM, 27V DC MOTOR. 3.7 Amps., Cont. Duty 1/16 HP, Air-Cooled.

\$1.75

ONLY EACH

Subject to prior sale.
Specify preference in shipping.
25% deposit with orders.

EMPIRE ELECTRONICS
2517 S. Michigan Ave.
Chicago 16, Illinois

For further information, check number 88 on page 126.

108 • CQ • February, 1960

ditions throughout most of the world seem to have been normal on November 29th, with ratings of 5 and 6 (fair to fair to good). On the 28th and 30th however, ratings ranged from 4 over the North Pacific, to 5 over the North Atlantic, to 6 in South America and South Africa. On a world-wide basis conditions were between poor to fair to fair to good. Conditions during the CW period were poorer than during the Phone period, and this seems to be reflected in the scores so far received. The CQ forecast called for "seasonally normal" conditions for the CW period.

Next Month

Next month's column will feature a discussion of the present course of the solar cycle, and the likely effects of the cycle upon propagation conditions during 1960.

73, George, W3ASK/HB

CONTEST CAL [from page 92]

The only open date left would have been too late in the season for 160 meter activity so it was decided to share the YL/OM week-end in March. Being this is only a one band affair no harm should result.

The contest is primarily planned for the United States and Canadian areas but foreign countries are invited to work VE and W stations if conditions permit.

Operation will be limited to CW only.

Rules

Points: 1 point for each QSO in the same call district; 2 points for QSOs with other call districts; 5 points for foreign QSOs. (exclusive of W/VE/VO.)

Multipplier: A multiplier of 1 for each state, Canadian province or foreign country worked.
Final Score: Total QSO points multiplied by the total multiplier points.

Sample QSO: Nr. 1 VE3BWY 579 Ont.

Your log should show the date, time, message sent and message received.

Awards: A certificate to the leading station in each state, Canadian province and foreign country.

Mail your logs to CQ Magazine, Att: 160 Contest, 300 West 43rd Street, New York 36 N.Y., no later than March 31st, 1960.

Ed Note

No word from the REF who usually holds one section of their contest late in February.

Regarding the CW section of our contest, conditions were pretty miserable on all bands. The overall scores are lower than last year's. However there was plenty of activity and some of the claimed scores being received are surprisingly high. In any event there is plenty of work for the Committee, so back to the salt mines.

73 for now, Frank, W1WY.

YOU ARE THERE!

with *Telrex* "TRI-BAND" SYSTEMS

There's long term dependability, scientific leadership, world-wide respected performance plus quality of material too, at a price even the modest budget can afford.

Enjoy superior performance . . .

You're always a "step ahead" with Telrex. Arrays from \$5.95 to \$12,000. Also available Rotators, "Baluns", Towers. Dollar-for-dollar better in every way. Send for technical bulletins, today!

ANTENNAS

SINCE
1921

Communication and TV Antennas

telrex LABORATORIES

ASBURY PARK 42, NEW JERSEY, U.S.A.

For further information, check number 39 on page 126.

CONVENTION NEWS

(See page 9)

Sub Liminal Ad

There are all sorts of interesting (subscribe to CQ) things going on these days that you should know about (subscribe to CQ), like the attempts being made to change the (subscribe to CQ) Communications Act of 1934 to permit (subscribe to CQ) foreign amateurs to be licensed while in the U.S. (Subscribe to CQ) And there is the coming International Amateur Radio Convention (subscribe to CQ) to be held in New York City next August (fill out the blank below) which should turn out to be the biggest ham convention (fill out blank) ever held anywhere. You might be interested (fill it out) in getting all the inside info on it too. Tell you what, just fill out the blank below (fill it out right now) and you'll get all the news as it happens.

CQ Magazine
300 West 43rd St.
New York 36, N.Y.

One year, \$5

Two years, \$9

Three years, \$13

C2

in U.S. Possessions, APO & FPO, Canada & Mexico

Enclosed is \$.....for a.....year ☐ new ☐ renewal subscription to CQ, to be sent to:

Name..... Call.....

Address

City..... Zone..... State.....

Pan-America and all other foreign: 1 yr. \$6; 2 yrs. \$11; 3 yrs. \$16.

acf

INDUSTRIES, INCORPORATED

Several qualified engineers will be selected to join in a program which is advancing the state-of-the-art of

IONOSPHERIC PHYSICS

and the study of

BACKSCATTER PHENOMENA

Background in these areas will be developed in our training program in Riverdale, Maryland, and these engineers will become part of a team extending experiments of the R & D Department to the field, in both Domestic and Overseas assignments, and will have ample opportunity to grow technically.

They will possess a combination of the following requirements:

- ✓ BSEE, or equivalent consisting of combined civilian or military technical school plus work experience.
- ✓ Presently employed as a Field Engineer or Project Engineer.
- ✓ A good command of some of the following:
 - RADAR, preferably High-Power
 - HF Long-Distance Communications Systems
 - Tropospheric or Ionospheric Scatter Systems
 - Meteor-Burst Communications Systems
 - Propagation Prediction—computation of Propagation for long-distance communications
 - Ionospheric Sounder Operations
 - RDF Systems
 - Doppler RADAR Systems
 - Amateur Radio Enthusiast

- ✓ FCC License, 1st or 2nd Class.

They must be willing to accept assignments in areas where dependents are not permitted for periods up to one year. Per diem is paid on all field assignments and an additional bonus is paid for overseas assignments.

Applications Are Also Being Accepted For

**SENIOR SCIENTISTS
ENGINEERS (All Levels)
LABORATORY TECHNICIANS**

for permanent assignment at our Riverdale, Maryland R & D Laboratories.

For Further Information Write:
MR. ROBERT J. REID
Technical Employment Manager

RESEARCH & DEVELOPMENT LABORATORIES

acf

INDUSTRIES, INCORPORATED

RIVERDALE, MARYLAND WARFIELD 7-4444

YL [from page 95]

5th annual Birthday Party. A hayride, good food, singing, prize drawing, and lots of gabbing filled the hours Fri. evening. At the Saturday luncheon 61 YL's were present. New TYL RUN officers elected for 1960 include: President and NCS, K5ALF, Mae; V.P. and ANCC, W5FFH, Katherine; secy-treas., K5MJW, Betty; P/C, K5JXD, Marge. The ALAMO YL's have invited members of TYLRUN to San Antonio for the 1960 Party.

YL Nets

To the YL Nets listed on p. 82 of CQ for Oct. '59, add:

14,260 Wed. 1400 EST K5BJU SSB Net
29,130 Tues. 1300 EST K6JPY Hairpin
3950 Tues. 2000 EST K4BAL, Florida
7215 Thurs. 0900 EST W3UUG, Friendly 40
7235 Fri. 0900 CST, ALAMO YLs
7260 Thurs. 0900 EST K4DNL, Ga. Peach
50,160 Thurs. 2000 EST K4PPX, Florida

Corrections:

3750 Tues. 0930 CST W9MYC, LARK CW
29,000 Mon. 2200 CST W9BCA, LARK

"CQ YL"

It may be too late to put it under this year's Christmas tree, but it's never too late to read and enjoy your copy of "CQ YL!" The one and only book devoted to every aspect of YL participation in Ham radio—18 chapters, over 500 photos. Order from W5RZJ (QTH at head of column), \$3, postpaid.

Happy Hamming, good DX, and all the best in 1960!

33, Louisa, W5RZJ

LITTLE NIC [from page 55]

through the receiver. You are now ready to put "LITTLE NIC" on the air. Before connecting it to the antenna, a good match is important for proper operation.

Tuning and Operation

Hook up to your favorite 6 meter antenna, preferably a 6 meter beam. The author used a beam as well as a 1/2 wave halo. The oscillator C1 is adjusted for maximum collector current on the power amplifier. The PA capacitor, C5, is always tuned to the minimum and the antenna trimmer is always tuned for the maximum. To use on CW just plug the key into J1 and open S3.

When the band is not open you should get about 30 miles on a 5 element beam, and 15 miles on a 1/2 wave halo (halo indoors). With a band opening it should get out with the rest of the transmitters. The auditor has never tried it during a band opening—they are few and far between in this part of the country. Good hunting; you will not burn up anyone's receiver, but you will have a lot of fun trying. Just think, no TVI.

en in the contracting business with his brother. Becoming ill he went to Arizona in search of health. When he found it he decided to remain in Arizona, and his brother followed him there and now lives next door. Harry is retired," he says, but while we were there his brother came in with an armful of blueprints and they briefly discussed some building project. Two years ago Harry took up amateur radio, for its therapeutic effect," as he put it.

In Tucson, there is a school for asthmatic children, who come from all over the country. Now these youngsters being otherwise normal, take your children and mine, just don't write their parents. And that is the reason "The Tucson Monitor Station" was born. Here was a chance to render a real service, and Harry saw and grasped it. He began patching these youngsters to their parents, and many a mother and dad has slept easier because of these contacts.

Arizona has several air bases and when some of the units go far afield for a few weeks or months, Harry keeps the fly-boys in touch with their wives and families at the home base. Sometimes, of course, they don't live in Tucson and then a long distance call is involved. W7CKV averages 250 phone patches per month, about one third of which require a long distance call on one or both ends. Phone Company please take note.

Harry monitors 29300 from 10 am until 11 pm MST, except when working on MARS frequencies.

Like all things, good and bad, our visit had to end, and we boarded a plane for home. So, here we are back in Illinois, resuming our QSO's with W7CKV.

Fellows, won't you please move off of 29300 a just a little ways and give Harry a chance to continue his fine unselfish service. The ten meter band is a big one, and Harry has chosen the less popular end of it to operate. Please give him a break, and besides, I might be trying to talk to Bob.

1625-807 [from page 111]

occupied by the #1 grid lead. The cathode lead is soldered into pin #4.

In order to compensate for the different base used by the 807 tube, adapters were assembled, using a 7 prong plug or an old 837 or 1625 tube base, sawed off, and connected to an 807 tube socket with heavy leads.

The filaments of the four tubes used were wired in pairs which can be changed, by means of DPDT toggle switches, to either a series or parallel filament circuit for each pair of tubes. It is therefore possible to use four 12 volt tubes, four 6 volt tubes, or a combination of two 6 volt and two 12 volt tubes. The switching



TRADING POST

SAVE ON GOOD USED GEAR

Collins 32V2/3	\$299.95	Heath DX 35	\$39.95
Pacemakers	\$299.95 & \$349.95	Viking 6N2	\$99.95 & \$109.95
Drake 1A like new	\$249.95	Viking mobile, VFO	\$79.95
DX-35 with VFO	\$59.95	Elmac A54 mobile	\$69.95
DX-35, push-to-talk and mike	\$56.95	Elmac PMR6A mobile receiver	\$69.95

Send for list H & H — Ham Headquarters

H & H ELECTRONIC SUPPLY, INC.
506-510 Kishwaukee St., Rockford, Illinois



YOU
SAW
IT IN
CQ!



GOOD BUYS — ALL NEW

OIL FILLED CONDENSERS . . . mounting hardware available at 25¢ a set
 4 mfd/1650 dewv, large ceramic terminals, GE . . . 3¢ \$2.29
 10 mfd/1500 dewv, ceramic terminals, C-D TPL 15100 4¢ \$3.19
 8 mfd/660 acwv, button terminals, Mallory CMA-482873 3¢ \$2.39
 4 mfd/1000 dewv, ceramic terminals, Sprague 2538-6 1¢ .95¢
 10 mfd/600 dewv, ceramic terminals, C-D T-6100-G/GE 2¢ \$1.19
 4 mfd/600 dewv, ceramic terminals, Sprague 35-5437 1¢ .59¢
IF TRANSFORMERS . . . all are products of leading manufacturers
 4.5-5 MC, dbl air tuned, ceramic coil and var. . . 8 oz. 3/95¢
 455 KC, National dual air trimmed . . . 10 oz. 79¢
 5 MC midget, single tuned, Muter, only 2" high . . . 4 oz. 2/89¢
TRANSFORMERS . . . power transformers have 115 volt, 60 cycle primaries
 140 watt modulations, 2-811s modulating 2-24Gs . . . 11# \$4.45
 Scope, 2500 v/3 mills and 2.5 v/1.75 amp, HS, oil filled 5# \$1.95
 Power, 600 vct/350 mills and 12.6 v/1 amp, HS . . . 18# \$4.29
 Only 500 ohm line to voice coil, 8 watt, Thord TS60848 2# \$1.39
 Filament, 6.3 vct/0.6 amp, HS . . . 1 1/2# 79¢
 Audio output, Pri 8K ohms et, sec 15/125/250 ohms, HS . . . \$1.95

Plate coupling, 5K to 15 ohms, 5 watts, HS . . . 1 1/4# 79¢
VACUUM TUBES . . . Bargains, some are even cheaper by the hundred
 2X2 . . . \$2.95/doz 3B24 . . . \$4.95/doz 6SL7GT . . . \$6.45/doz
 6SN7GT . . . \$5.45/doz 6V6GT . . . \$6.45/doz 6H6 . . . \$2.95/doz
 80Y . . . \$1.49/doz 7193 . . . \$1.49/doz 6N7GT . . . \$6.95/doz

CATHODE RAY TUBES . . . Quantity prices available on all of these
 3AP1 . . . \$1.45 3FP7 . . . \$1.00 pdd 5FP7 . . . \$1.29 pdd
 5JP1 . . . \$2.45 pdd 5JP2 . . . \$3.45 5FP11A . . . \$2.50 pdd
MISCELLANEOUS ITEMS . . . all represent outstanding quality values
 Meter, 0-50 microamp, Burlington Model 921, HS 1 1/4# \$4.95
 Dynamotor, 6 v input/600 v/150 mil output, Elcor . . . 10# \$6.95
 Attenuator, 600/600 ohm T-pad, Tech Lab, 30 steps 1# 2/4.95
 Variable audio reactor, Nom ind 1.35 or 4.4 henries 1# \$1.95
 DPDT bat handle toggle switch, 3 amps/115 volts, all plate 49¢
 Choke, 10 hy/150 mills, 139 ohm, HS, ceramic terminals 6 1/2# \$1.89
 Choke, 6 hy/80 mills, 150 ohm, Chicago #7462 . . . 2# 95¢

WRITE FOR FREE GOVERNMENT SURPLUS BARGAIN BULLETIN

Send adequate postage with orders We refund any overage

All prices are FOB Sacramento

JOE PALMER


PO BOX 6188 CCC, SACRAMENTO, CALIF.

IT'S SO EASY TO OWN A TB-500 TRIBANDER AND YOU JUST COULDN'T BE BETTER SATISFIED!

For Only **49.95** Cash Price

As Shown — Less Mast

10-15-20 METERS

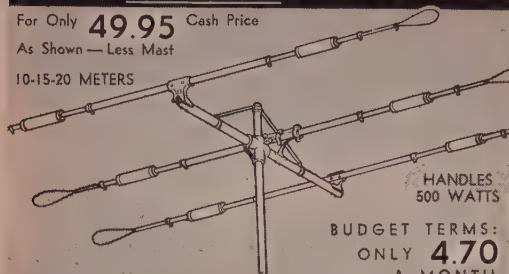

TURN WITH TV ROTOR

SINGLE 52 OHM COAX. FEED — WEATHER-SEALED TRAPS;
PRE-TUNED HEAVY-DUTY MODEL TB-600 AVAILABLE AT \$59.75

TRY THE TB-500 BEFORE YOU BUY IT—

If fully satisfied, pay \$4.70 within 10 days and \$4.70 per month for 11 months.
ORDER DIRECT FROM HORNET . . . AND SAVE

MAIL COUPON NOW—NO MONEY REQUIRED WITH ORDER

HORNET ANTENNA PRODUCTS CO.
P. O. BOX 808 • DUNCAN, OKLA.

MY CALL
LETTERS ARE

Please rush the TB-500 TRIBANDER for a 10-Day Free Trial. If fully satisfied, I agree to pay as checked below. If not satisfied, I agree to return the beam prepaid within 10 days without further obligation.

☐ I will pay cash within 10 days if fully satisfied.

☐ I will pay \$4.70 within 10 days and \$4.70 per month for 11 months.

Name _____

Address _____

City _____

State _____

ABSOLUTELY NO RISK ON YOUR PART

WRITE FOR
FREE
ILLUSTRATED
CATALOG

THE BEAM WITH A STING

HORNET

Antenna Products Co.

P. O. BOX 808 • DUNCAN, OKLA.

For further information, check number 41 on page 126.

CUT HOLES IN 1-1/2 MINUTES

(OR LESS)

with Greenlee
Chassis Punches



Many sizes . . . quickly make smooth, accurate holes in metal, hard rubber, or plastics . . . for sockets, plugs, controls, meters, panel lights, etc. Easy to use, simply turn with a wrench. Write today for free literature.



GREENLEE TOOL CO.

1783 Columbia Avenue, Rockford, Ill.

For further information, check number 42 on page 126.



arrangement used is shown in fig. 2.

Operation of this linear amplifier, driven by one of the popular commercial SSB exciters and coupled to a beam antenna at the author's station, has been satisfactory enough on 2 meter SSB that a higher power amplifier capable of running a so called "dc kilowatt" is hardly ever used.

Although no detailed characteristic measurements were made as a basis for comparison of the three tube types used, relative forward power with the same amount of cathode drive as indicated by a reflected power and SWR bridge, showed no appreciable difference between the 807 and 1625 types, as would be expected. The 837 appeared somewhat less efficient although more rugged, and reflected its inherently larger interelectrode capacitance and lower maximum frequency rating. More driving power was required.

It is hoped that others may find the tube modification and interchangeability feature of interest and make some use of the information provided.

PEAK LIMITER [from page 49]

little deviation. A tough guy to please, with audio, Roy also stated that the quality of the speech suffered absolutely nothing in comparison with the unlimited audio which is as good as any well built DX 100 using a fair crystal mike can be. On the test bench, using a Heath Audio Analyzer and Audio Generator I found the limiter could perform its function well over a 25 db range before it showed any signs of overloading or distortion. Upon further investigation it turned out to be that I was overloading the input triode section of the 6AN8. This might lead to the question as to why I wasn't conventional and put the controllable pentode in front of the rig and prevent overload at the source. I had good reasons for my madness. First of all, I doubt if there are any communication low level mikes (except the Telefunken, AKG, and etc. Hi Hi) that will put out enough to make the first triode draw grid current with the present 1K resistor in its cathode circuit. (Under critical measurement the front end will take as high as -25 dbm before going to pot.) An average high output crystal and dynamic mikes will supply a 1 meg load with about -40, with a lot of sound pressure. Second, I wanted to be able to limit my hybrid phone patch which is fed into the grid of the controlled stage. We all know that the incoming phone line audio is always lower than the level we develop from our own F1 units. . . . Make sense yet??? Again, set the modulation gain and limiter threshold for 100% modulation on the incoming signal and when you modulate that rig through your own telephone transmitter you will still have continuity in the fuses for that 2 kw pep outfit.

To sum it up, as AM can use *Audio Peak Limiting*, SSB needs it even more if we are to realize the full benefits from it. If you want to keep those grid mills down and intelligence high, look into audio peak limiting. ■

PAN SCOPE [from page 47]

and T6 for maximum output. Set generator to 1650 kc (first if frequency of the receiver used with this equipment) and adjust oscillator transformer T2 and rf input transformer T1 for maximum output. Disconnect vvm and plug video output into vertical input of oscilloscope. Adjust center frequency and sweep width controls to center 1650 kc pip on scope tube. Move pip across scope screen by varying signal generator input frequency. Adjust linearity control so that movement of pip is linear with frequency change. Due to the extreme simplicity of the sweep circuit there will be some interaction between the linearity, sweep width, and center frequency controls. With the sweep width at maximum sweep approximately 60 kc of the spectrum will be seen.

Signals for the pan-scope are taken from the plate circuit of the receivers first conversion if amplifier. A coaxial line (RG-58/U) is connected to the plate through a 3-mmf tubular ceramic capacitor. The other end of the line is connected to a phone jack mounted on the rear apron of the receiver chassis. The shield of the coax line is grounded only at one end.

Performance

Fig. 5 shows some examples of what may be interpreted from the signals seen on the oscilloscope tube. ■

½ GALLON [from page 43]

connected to the bases of the transistors. Each consists of eight turns of #20 wire wound on a 47 ohm 1 watt resistor. Eight resistors are connected to the transistor emitters. Each is constructed by winding 14 turns of #14 enamel wire on a ⅜ inch form. They are self-supporting solenoid wound. The low ohmage resistors in the emitters help equalize currents; the suppressors in the bases help equalize gains.

Adjustment

When wiring has been completed, the supply should be checked and adjusted. Be sure to connect the supply to the battery with the correct polarity or the transistors will be destroyed. Temporarily short the high voltage terminals of condenser C1 to ground. Adjust bias resistors R1 and R2 to read 1 and 50 ohms respectively. Connect an ammeter in the lead from the battery to power supply. Adjust R2 very slowly

YOUR mailing strip is IMPORTANT

3.50 7M 3593R C JAN 59

J W CUMMINGS-W6SF1
752 PICO AVE
SAN MATEO CALIF

This is a typical mailing strip


Whenever you write to CQ concerning your subscription, change of address, or renewal, cut your mailing strip from the wrapper of your latest copy and attach it to your letter.

This will help us to find your stencil in our files which is the first step in faster, more accurate service to our readers.

CQ Magazine

300 West 43 St., New York 36, N. Y.

Knucklebusters take note...

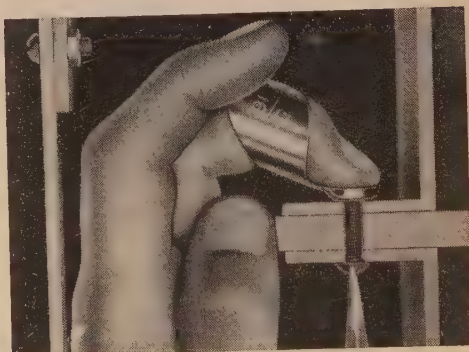

A new and unique set of TOUCH 'n HOLD Finger-Tip Wrenches for those hard to reach spots. Check these outstanding features . . .

- Combine the sense of touch with the grip ends of wrenches.
- Pick up the nut, position and hold it in place with only one finger.
- Worn like a ring and easily adjusted to all finger sizes.
- Set includes 4 most popular sizes for hex nuts. (1/4, 5/16, 11/32 & 3/8)
- A professional quality tool made of stainless steel.
- Packed in attractive clear plastic container.

ONLY \$1.98 per set of 4. PPD. Order direct:

RAMECO PRODUCTS

Box 385 Huntington Station, N. Y.

Patented. Dealer inquiries invited. Bulletin free.

For further information, check number 44 on page 126.

February, 1960 • CQ • 113

DOW-KEY COAXIAL ELECTRONIC TR SWITCH



WITH
Built-in Power Supply

Designed to operate in 1.8 to 30 mc. range. NO EXTERNAL D. C. POWER NEEDED! Just plug into any regular 120 v. A. C. outlet. About 15 watts power required.

FEATURES INCLUDE: Rated maximum legal amateur power. Low VSWR. Cast aluminum construction makes DKC-TRP TVI proof. Switch allows break-in operation with single antenna system. Type N connectors available at slight additional cost.

FACTORY WARRANTY!

DKC-TRP
... Each

\$27.75

See your Electronic Dealer.

DOW-KEY CO. INC.

THIEF RIVER FALLS, MINNESOTA

For further information, check number 45 on page 126.



NOW!
only
\$49.95

a Ham Tower anyone
can afford—

THE LEADER-40

Here is a sturdy, low cost, quality tower that is ideal for novice or technician. The same E-Z WAY standard of quality found in our higher priced towers has been incorporated into the LEADER-40. Cranks up to 40' - down to 20'. Equipped with winch and safety rest. Will support 2M, 6M, or Quad unguied. Mast extra.

Sold by
Top Flight Distributors
► Write for catalog CL 40

E-Z WAY TOWERS, INC.
P. O. BOX 5491 - TAMPA, FLA.

For further information, check number 46 on page 126.

until the ammeter reads about 4 amps. Remove the short and ammeter. Connect two 4000 ohm 200 watt resistors in series from the high voltage output to ground. Actuate K2. If the circuit does not oscillate reverse the leads going to the transistor base. (Green)

WAVE METER [from page 41]

fed with a 50 ohm signal generator through 50 ohm cable. A detector with a 50 ohm input impedance was used.

The table below gives the performance of the loop coupled model.

Input frequency	Frequency calculated from wavemeter	Bandwidth 3 db points	Insertion loss
300 mc	303 mc	1. mc	27 db
350	374	1.5	23
400	431	1.5	19
450	475	2.	16
1000	975	2	10
1500	1527	2	8
2000	2010	3	4

The following data is for the model in which the connections are made directly to the center conductor of the wavemeter.

Input frequency	Frequency calculated from wavemeter	Bandwidth 3 db points	Insertion loss
250 mc	254 mc	1 mc	17 db
300	315	2	14
400	423	3	8

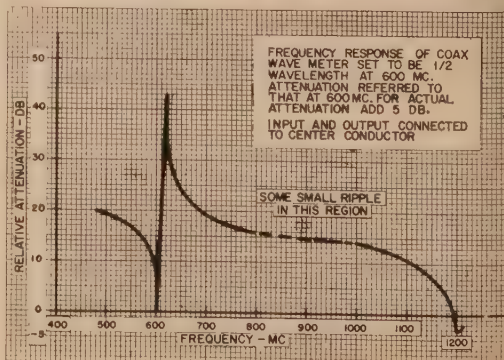
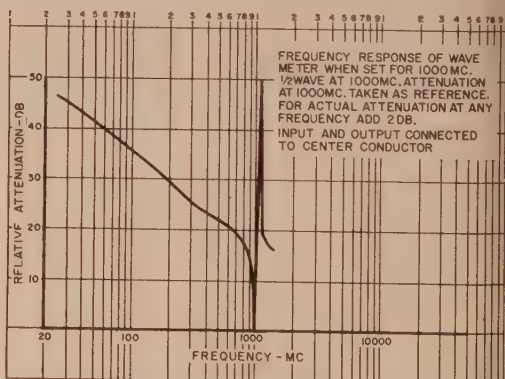


Fig. 4

00	499	4	7
00	595	4	5
00	700	6	5
00	795	8	3
00	890	9	3
00	990	12	2
00	1280	30	1
00	1450	>30	<1
50	1740	>30	<1
00	1920	>30	<1

The bandwidth was not measured very accurately but the values obtained at least indicate the approximate value to be expected. It seems that the accuracy of the wavemeter is poorer below 500 mc. This might be due to the wavemeter being made up of two unlike sections of coax in this range.

From the data it would seem that it might be better to use the wavemeter with connection made to the center conductor at the lower frequencies where the loop coupled model has rather high insertion loss. The lower insertion loss might make it easier to secure a usable indication from the detector.

For the benefit of the curious and for those who might have other uses in mind for the wavemeter the graphs in fig. 4 are included. These show the frequency response of the wavemeter over a wide frequency range. ■

F AMP [from page 36]

on the bottom of the printed circuit board for the filament, B+ and ground leads, as well as the input, output and gain control. Connect wires to these various points on the board, from the underside of the board. The two points marked, "GAIN," are connected to the gain control, R5. The "IN" point on the board connects to the input jack on the rear of the chassis. Likewise, the "OUT" jack on the rear of the chassis connects to the "OUT" point on the printed circuit board.

The cable from the output jack of your converter, is plugged into the input jack on the if amplifier and the amplifier output jack connects to your receiver antenna terminals. Use a short piece of RG-58/U or some other coax shielded cable for this lead.

If your receiver picks up signals other than those from the if amplifier, you may eliminate most of this feed through by mounting a jack on the rear of your receiver chassis, close to the antenna terminals. Disconnect the receivers lead which connects to this antenna terminal and connect it to the jack which you installed on the receiver chassis. This will shield the lead from the if amplifier completely and to a large extent, eliminate feed-through at the if frequency.

Be sure that the chassis is at "floating ground" if you are using an ac/dc receiver,
[Continued on page 123]

YOU NEED THIS

FREE GIANT 1960 B-A CATALOG

A Complete Buying Guide for Everything in
RADIO 1960 TV ELECTRONICS
ANNUAL CATALOG 601
BA
SINCE 1927
Guarantee

204 KING-SIZED PAGES

EVERYTHING IN RADIO TV AND ELECTRONICS

100'S OF NEW ITEMS LISTED HERE FOR 1st TIME

21 PAGES OF BARGAINS NOT IN ANY OTHER CATALOG

BURSTEIN-APPLEBEE CO.
Dept. 1E, 1012 McGee St., Kansas City 6, Mo.

☐ Send Free 1960 B-A Catalog No. 601.

Name.....

Address.....

City.....State.....

SEND FOR IT TODAY

For further information, check number 47 on page 126.

Look for this emblem on CQ Handbooks in your favorite bookshop or ham dealer.



ARE YOU MOVING?

If you expect to move, and IF you know your new address now, and IF you don't want to miss any issue of CQ here are three things you can do right now!

1. Tear your name and address label off the wrapper of this issue and paste it in this box right over these words, or make a complete and accurate copy of your old address label
2. Print your name and NEW post office address in the lines below:

(Name)

(Number and street—or Route)

(City)

(Zone)

(State)

3. Cut out this whole box and mail it to: CQ Magazine, 300 W. 43 St., New York 36, N. Y.

BARRY'S

FEB. SPECIALS!

- Hewlett-Packard Model 623B SHF Test Set. New Condition. Orig. book & calibration sheet. \$1100.00
- Kay Mega-Marker. Sr. \$25.00
- Ferris Microvibrator Model 18B. \$27.50
- Supreme AF/RF Signal Generator Model 561. \$39.95
- Westinghouse Scope Transformer. Pri: 115 VAC @ 60 CPS (16.5 VA). Sec: 2.5 Volts @ 5 Amps. Sec: 5000 V. @ .0025 Amps. Brand New. Westinghouse. \$35.95
- Hammarlund Super-Pro Transformer. Mfd. by Chicago Xfmr. Co. Pri: 115 or 230 VAC @ 60 CPS. Sec: 157-9-4-5 V. @ 100 Ma. R.M.S. \$4.50
- Oncoer Match Above. Original equipment. 25 Hy @ 100 Ma. (350 Ohm). B. W. P. \$24.95
- UHF Transmitter—Compact. Near 1 1/4 meter band. Converts easily to 2 meters. Uses two 6201's into single Amperex 6360 twin diode. Size 4" x 4" x 11". Antenna is 10 1/2". New. (Most beautiful & fine. Finest parts we have seen in yrs.) A real gem, complete with tubes, antenna and case (no book). Schematic furnished. \$19.95
- Battery for above xmtr furnishes 300 VDC plate and 6.3 VDC filament. Water-activated. \$4.95
- Plate Transformer. Herm. s'ld. 117 VAC @ 60 CPS. Out: 6,000-0-6,000 VAC @ 400 Ma. 108 lbs. Compact. \$70.00
- G.E. Oil Capacitor. 1 Mfd. @ 6,000 VDC. Approx. 7 1/2" H. x 4 1/2" W. x 3 1/2" D. Orig. Boxed, unused. \$4.95
- Oil Capacitor 2 Mfd @ 7500 VDC. \$22.50
- Jennings "U" Variable Vacuum Cap. 50 to 250 Mmfd @ 15 KV. new. \$69.00
- Double-Spaced Variable Capacitor. 14 Min. to 84 Max. Mmfd. Will handle up to 100 watts AM. Ceramic insulation. \$1.00
- Electrolytic Condensers. 4 x 20 Mfd @ 450 VDC. Sprague. Stock #C04X20. each 69c
- Jennings Fixed Vacuum Capacitors Type JCS—25 Mmfd @ 10,000 V. Peak. Cat. #JCS25; 50 Mmfd @ 10,000 V. Peak. Cat. #JCS50. each \$3.75
- New Silicon Rectifier. Input: 130 Volts at 500 Ma. Price 75c each (10 for \$7.00)
- Hammarlund, Super-Pro SP600 Receiver. Excellent condition, lab tested. \$450.00
- Mallory VP353 Vibrapack. In: 6 VDC. Out: 200 V. @ 100 Ma. Switch for 125, 150, 175 V. outputs. Portable & mobile use. For 12 V. operation, 2 supplies in series will deliver 400 V. @ 100 Ma. Brand new. \$5.95 (2 for \$11.25)
- Hi-Fi Special. Western Electric 300B Audio Output Tubes. SPECIAL \$5.50 each (2 for \$10.00)
- Mallory Inductometer. Unused. This famous device is an excellent (HF front-end tuner suitable for TV, FM, Ham/Comm'l revs. etc. Brand new, unused. \$2.95
- RCA Remote TV Control. For use in 1955 and many earlier RCA TV sets (write for list of sets unit will accommodate). Controls picture & audio. Convenient, practical @ \$13.95 (with 28 page manual).
- Crystal Oven. 12 VAC or DC Oven for 10 Crystal type CR 18/U, or similar crystals. Heater & thermostat enc. Cat. #CFT40148A. \$2.50
- Adjustable Time Delay Relay. SEST. 5 Amps. (N.O.) 115 VAC Coil. Adjust. from 2 to 30 sec. \$5.95
- Overload Relay. Adj. from .5 to 2 Amps DC. Westinghouse Glass enclosed. \$7.50
- CD 2 Mfd. @ 6000 VDC Oil Capacitor. \$8.00
- Sangamo Mica Capacitor .002 Mfd @ 12,500 volts. \$4.95

Come in and browse. We are open Saturdays from 9:30 am to 3 pm.
Subways: BMT (local) to Prince St. Walk 1 block to Spring St.
IRT Lex. (local) to Spring St.
Bus: Broadway #6 Bus to Spring St.
Car: We are 4 blocks North (uptown) of Canal St. Parking allowed on Broadway on Saturday.

BARRY

ELECTRONICS
CORP.

512 BROADWAY (NEAR SPRING ST.), DEPT. C-2
New York 12, N. Y.
Telephone: WALKER 5-7000

The Ham Shop

RATES: 25¢ per word per insertion for commercial business organizations.
10¢ per word per insertion for individuals on a non-commercial basis. Full payment must accompany order.

MINIMUM CHARGE \$1.00

CLOSING DATE: 20th of the 2nd month preceding date of issue.

MAIL: Your typewritten copy with full remittance should be sent to CQ Magazine, 300 West 43rd Street, New York 36, N. Y.
Attention: Classified Ad Dept.

NOTE: The products and services advertised in this section are not guaranteed by the publisher of CQ. Telephone orders not accepted.

FOR SALE

FOR SALE: 75A3, in perfect condition, looks like new 3.1 and 800 cycle filters \$350. Lane Barbour, K5KKW, Bay City, Texas.

SAVE on Electronic, Radio and Communications Components and equipment for Hams and Commercial use. So thousands of parts in stock—many more coming in daily! all at unusual savings. If you live in or near Philadelphia visit our new warehouse at 31st & Grays Ferry, or send for free catalog. Selectronics, 1206 South Napa Street, Philadelphia 46, Pa., or Phone HOWard 8-4645.

TELETYPE PERFORATOR PAPER OILED TAPE—yellow 11/16" wide, 8" O. D. Roll, 1" E. D. Sold only in sealed boxes containing 40 rolls each. Shipping weight 40 pounds. \$10.00 per box. RTTY Clubs write for quantity discounts. Selectronics, 1206 Napa Street, Philadelphia 46, Pa.

TOROIDs: Uncased 88 mhy like new. Dollar each. Five \$4.00 PP. DePaul, 101 Starview, San Francisco.

NEW SERVICE for amateurs. List your equipment for sale, including price. Let us know your needs. No charges to buyers or seller. W2EEJ, Herbert Greenberg, 8212 Rutgers Road, Franklin Square, N. Y.

FOR SALE: Collins 32V1. Mint condition! Used only 100 hours since factory reconditioning 6 months ago. \$290. John Minette, Saint Edward's Seminary, Kenmore, Washington.

CUSTOM-MADE Decals for Hamclubs reasonable. Silk. Screens for printing Meter Scales, Chassis, Front panels. Free information. W5HOW, Rt. #2, Box 1005, Humble, Texas.

40 BACK ISSUES of CQ & OST \$10.00 Postpaid. Bill Tagan, Box 5938, Kansas City 11, Missouri.

ATTENTION MOBILEERS! Leece Neville 6 volt 100 amp. system alternator, regulator, and rectifier, \$45.00. Also Leece Neville 50 amp. system, \$50.00. 12 volt 100 amp. system, \$85.00. Guaranteed no ex-police car units. Herbert A. Zimmerman, Jr., 115 Willow Street, Brooklyn 1, N. Y. K2PAT, ULster 2-3472 or Jackson 2-2158.

CALL LETTERS, gold or silver, may be applied to any surface. Set of 2" 65¢, 3" 85¢. A & B SERVICES, Box 147B, Kittery, Maine.

DECORATE YOUR CAR WINDSHIELD WITH YOUR CALL LETTERS. Attractive 1 1/2" letters and numbers available in gold. Complete single set 75¢, two sets for \$1.25. Include name, call, address. (Larger sizes available, prices sent upon request.) Money refunded upon return of unused decals if not satisfied. All orders must be prepaid. Send to Box CC, c/o CQ Magazine, 300 W. 43 St., N. Y. 36, N. Y.

PRESERVE YOUR HAM TICKET. Social Service Card, small photo, passes and anything else of value that is wallet-size. We will laminate it in clear plastic, guaranteed for life. Lamination will prevent it from getting torn, soiled or frayed. Send your ticket or anything of value with \$1 in stamps or cash for each item that you want preserved. 24-hour service. Send to Dept. HW, CQ Magazine, 300 West 43rd St., New York 36, N. Y.

MOON BOUNCE? Claim your own acre of the Moon's surface! Choice acreage left in the Mare Imbrum, the Moon's largest known crater. Authentic-looking, two-color rag certificates with gold seal only \$1.00 each with name and call inscribed free. Six for \$5.00. Check or M. O. to Box CG, 1738-201 St., Bayside 60, New York.

BILE RIG ELMAC A54 Xmttr, Elmac PMR 6A rcvr, 8 whip covering 10, 15, 20, 40, 80 mtrs. 6-12 V dynator, mic, relay, mount, control box. Complete installation \$200 or will trade for Gonset 6 mtr xmttr—rcvr. Local W2CMI Little Falls, N. J. CL 6-2539.

TELETYPEWRITER EQUIPMENT: Model #14, 15, 19, & 28 Teletype machines. Teletwriter Receiving Converter & others. For general information & equipment list site: Tom WIAFN, Alltronic-Howard Co. Box 19, Ston 1, Mass., Richmond 2-0048.

OR SALE: Tape recorder, battery operated. Mohawk digitape, new condition, with case, extra cartridges, foot operated playback for transcribing, loudspeaker amplifier, worth about \$400. First check for \$200. Box 45, CQ Magazine, 300 West 43 Street, New York 36.

COMPLETE HAM STATION for \$140.00. NC-188, DX-40 as carefully calibrated VFO. All are perfect in appearance and in performance. Would prefer local deal but will ship. Bob Gibbons, WIREP, 15 Everett St., Canton, Mass. Hewlett Packard Audio Oscillator 201B \$125. #325B Direction Analyzer \$125. FR-4 Frequency Meter \$650. G. R. 1107A Interpolation Oscillator \$550. FRA IF Teletype Converter \$35. N. R. #107 AF dual diversity converter 95. URA-8 AF converter \$75. URA-8A dual diversity comparator subassemblies with connecting plugs \$250. 1000 ohm dpdt relays \$2. 600 ohm input line-to-grid transformers \$1. W. E. Band Pass Filters \$14. Tom Howard, Mt. Vernon St., Boston 8, Mass. (Richmond 2-0916).

CRYSTALS: FT-243, .01% any frequency from 3500 to 100 Kilocycles—9¢. Filter Crystals, tested gov't. FT-241A 10 to 540 Kc. as available 50¢. Matched pairs, plus or minus 15 cycles \$1.95. 500 Kc. standards with oscillator circuit \$1.00. Add 5¢ per crystal for postage. All types of crystals available. Old HRO receiver wanted. Bob Woods, 64 Parkway, El Monte, Calif. Gilbert 8-3139.

HO desires Communicator III? Really new one has to be for highest offer. Photo available of unit only 25¢ HURRY! EX-K6ZNW, 643 Cypress Circle, edland, California.

RAY MEGA-SWEEP, TS-175/U Freq. metercovers 85 to 100 MCS. with orig. calibration book. Make offer. Brand new Johnson Rotomatic heavy duty beam rotator, half price. BC-348, SX-28, various command transmitters & receivers, 6 & 12 volt dynamotors. Also misc. parts. Robert Wolfe, W3HDT, 19 Virginia Ave., Baltimore 6, Maryland.

CRYSTALS AIRMAILED: SSB, Net MARS, Novice, etc. T-243, .01% any frequency 3500 to 8600, \$1.40, (10 or more 99¢), any quantity novice 99¢, 1705 to 30,000 FT-243, 1.95. All frequencies 60¢ additional for HC-6/U hermetic holders. Construction Article Crystal Packages: November Q—"Crystal Synthesizer", 31 crystals—\$39.05. November Q—"Phasing Sidebander", \$9.95, May CQ "Transistorized Receiver" \$15.95. June 1958 QST "SSB Package" mixer—5 crystals, FT-243 \$9.95, hermetics \$12.95, matched filter \$6.90. If you don't see it be specific, ask. Airmailing 6¢ per crystal. Crystals since 1933. C-W Crystals, Box 1065C El Monte, Calif.

FREE 1960 surplus flyer, Command Sets, handle talkies, receivers, transmitters, test sets, tech manuals, code machines, receivers, transmitters, transformers, capacitors, receiving and transmitter tubes, meters, VHF-UHF sets, plugs, parts. Write today Bill Slep Company, Drawer 178 CQ Ellenton, Florida.

SELL Mohawk RX-1 Receiver. Excellent first \$250 FOB Cleveland. J. C. McCarson, 25991 Bagley Rd. Olmsted Falls, Ohio.

FOR SALE: Class A labor. Will wire kits, build from scratch, modify surplus, etc. Very moderate rates. Inquiries invited. Robert Groh, 92 Brooklawn Drive, Rochester 18, N. Y.

FOR SALE: UX-62A with R-46B spkr. \$275.00. Will ship anywhere in U. S. Also Zenith Transoceanic \$65. Clark Fulton, K4LWV, Box 1486, U.S.C., Columbia, S. C.

1000 Call, name and address labels and 50 decals \$2.00. Will separate. A&B Services, Box 147B, Kittery, Maine.

SELLING COMPLETE STATION. Ranger-Courier SX101-Mrk 3A all like new. Will deliver 100 miles. Write for deal. KØIAD 408 40th N.E., Cedar Rapids, Iowa.

BC-728 OWNERS: FT-338 racks to mount BC-728 in auto, boat, truck, shack wall, etc. Receiver instantly removable. Includes charger connecting cable and plug, hardware. New. \$1.25 plus postage for 6 pounds. Bauer, 119 N. Birchwood, Louisville 6, Kentucky.

SELLING OUT: Magazines. CQ Magazines 1948-1954. QST Magazines 1944-1958. Best offer H. Bullock, 609 Tunlaw St., Alexandria, Va.

SELL my like new Pacemaker \$299.00 or my 32V1 \$249. May 75A4, early model, like new condition with 3.1 Kc filter, \$439.00. Will accept trades. Gene, W9ERU, Box 273, R. R. 4, Rockford, Ill.

RADIO & TV TUBES at Manufacturer's prices! 100% Guaranteed! Brand new! No re-brands or pulls! United Radio, Box 1000, Newark, N. J.

- T-17 Mike—Brand New. \$4.95
- Intercom Cable-7 Conductor. (Color-coded) 3/4" Dia. 6¢ per Ft.
- Coax Cable RG-59/U. 4¢ per Ft.
- 9 Ft. RG41/U Coax Cords, with 83-18P connectors on each end. \$1.00 each
- Coax Relay. Made for Navy: Deluxe. Will handle over 2 KWRF. w/three PL-259 standard coax connectors, 24 VDC coil. \$7.95
- Powell Announcer with Speaker. This device plays a tape recorded message over & over again. Unused. Orig. packing. Operates on 115 VAC. \$37.50
- TCS Noise Limiter Adapter Unit. With spec. sheet. 1 lb. Price 99¢
- GE-S.W.R. Bolometer \$14.95
- Ferris 32-B Radio Noise Field-Strength Mtr. W/Batteries. 150 KC to 20 MC. 5 to 100,000 mv reading on 3 scales. \$199.00
- Stancor AC Voltmeters. Takes 2" Round Mtg hole. 0 to 150 VAC—\$2.00 0 to 250 VAC. \$2.00
- G.R. Wavemeter 1140-A (250 Mc to 1200 Mc). \$69.95
- General Radio 834B Electronic Frequency Meter. \$75.00
- LM Freq. Meter (125 to 20,000 KCS). \$75.00
- G.R. VTVM Type 728-A (5 scales). \$90.00
- Amperite Time Delay Relay. Flts into standard 9 pin miniature tube socket. (115 VAC. N.O. contacts, 60 sec. time delay). Amperite #115N060T. 90¢
- Leach Power Relays. 115 VAC. 30 Amp contacts (N.O.) Unused—A Best Buy! \$4.95
- BELL & HOWELL Dehumidifier—Designed to keep gear dry—75¢ each—\$32.00
- Sockets: Acorn 15¢; 25 W B'ynt 75¢; 50 W B'ynt. \$1.50
- 83" High Relay Racks. 22" W x 18 1/2" D. Front & back doors complete w/hdls. Vertical mtg. rails on frt. & rear. Dark grey, smooth finish. \$49.95
- Relay Rack Panel. 8 3/4" x 19. Beautiful comm'l grey 1/2" steel. each 90¢
- Super Pro Choke. 50 Hy. @ 120 Ma. Herm. sld. (1150 Ohms DC resistance) 6 1/2 lbs. \$1.00
- Filter Choke. 35 Hy. @ 2 Amps (2.2 Ohms DC resistance) Herm. Sld.—\$4.95. Open frame. \$3.95
- RF Dummy Load. Deluxe 2 KW unit from Navy TEA equipment. Stdg. wave ratio approx. 1 to 1 below 30 mcs. Will match 50 ohm impedance of RG18/U cable. \$37.50
- TS-78/U Tune-Up "Dummy" Load. Excellent for citizen Band or VHF. \$1.00
- Ling Closed-Circuit TV Camera. Brand new. Write for details. Approx. \$700.00
- HS-30 Headsets with Headband & Impedance Matching Xfmr. Works on hi/lo imped. \$1.59
- Sontone Rechargeable Battery Cartridge. Model FC-2. \$7.95
- Johnson Citizen's Band Messenger—12 VDC/115 VAC. \$139.75
- In Stock: NC-60 @ \$49.95; G-50 @ \$299.50; HQ-145-C @ \$279.00; HQ-180 @ \$429.00; Drake 1-A SSB Rcvr @ \$249.00; B&W 51008 @ \$250.00; RME Model DB-20 Preselector @ \$33.00; RME Model VHF-152-A 2, 6 & 10 Meter/Preselector @ \$59.95
- Teletype Repeater—TT-63A/FGC. \$55.00
- Teletype Keyer Adaptor—KY-44B/FX. \$55.00
- Special Transmitting & Special Purpose Tubes: 3B28 @ \$3.00; 4-125A @ \$29.00; 4-250A @ \$38.00; 4X150A @ \$7.00; 4X250B @ \$35.00; 6KR-72 @ 15¢; 6F-100 @ \$8.00; 204A @ \$12.00; 300B @ \$5.50; 404A/5847 @ \$6.00; 807 @ \$1.15; 811 @ \$3.25; 830B @ 50¢; 837 @ \$1.00; 838 @ \$1.00; 884 @ 90¢; 5654 @ \$1.75; 8013 @ \$3.00. Many others. Largest diversified tube stock in country. Write for Special purpose & xmtg tube catalog (free).

Coming out soon, 1960 GREEN SHEET 25c—Write (Check full of Ham and Industrial electronic components, equipment and electronic tubes). Has prices for tubes, semi-conductors, tube cartons. All at sensible prices with Barry guarantee (cost of mdse only). \$5.00 minimum order. Mdse subject to prior sale. INDUSTRIAL INQUIRIES INVITED. Factory authorized distributors for Westinghouse, CBS tubes and semiconductors.

All prices F.O.B. N.Y.C. Specify method of shipment. All merchandise insured and guaranteed for cost of mdse only. Receiving tubes guaranteed 90 days—Special purpose & Xmtg. tubes and equipment guaranteed 30 days. Most test equipment in good, used condition.

BARRY ELECTRONICS CORP.

512 BROADWAY (NEAR SPRING ST.), DEPT. C-2
New York 12, N. Y.

Telephone: WALKER 5-7000

For further information, check number 48 on page 126.

TWO-WAY COMMUNICATION CRYSTALS



UNCONDITIONALLY GUARANTEED

FAST — 24 HOUR SERVICE

American specializes in two-way communications. Frequency correlation data for G.E., Motorola, R.C.A., Collins, Lear, Narco, Hallcrafters, Link, Gonsert, Aerotron, Heath, Bendix, U.S. Gov't and many other companies.

FREQUENCY RANGE	CALIBRATION TOLERANCE	PRICE
1000 KC to 2000 KC	.002%	\$6.50
2001 KC to 2500 KC	.002%	\$4.00
2501 KC to 9999 KC	.002%	\$3.00
10 MC to 15 MC	.002%	\$4.00
15 MC to 30 MC	.0025%	\$3.00
30 MC to 50 MC	.0025%	\$4.00
50 MC to 60 MC	.0025%	\$6.00

Write for quantity discounts—

AMERICAN CRYSTAL CO.

P. O. Box 2366

Kansas City 42, Mo.

BULB SNATCHER SPECIALS

RCA Voltchemyst Jr. VTVM WV 77A factory wired; probes & manual, new. \$27.95
 Globar Resistor CX, non-ind, non-rad, 600 Ω 118W, 12 in parallel make 50 Ω 1.4 kw. load. 89c ea. 12 \$9.95
 Mounting Clips for above Globars, Ni. PL. Bronze @ 10c
 Sprague WW non-ind glass encl. ferrule terms, type N1F 5% W chips: 15K 40W 50c, 2.5K 20W 40c, 5K 15W 30c
 Ohmite Rheostat 10 ohm 25W (125W with cover). 85c
 RTTY Polar relay WE-255A. \$4.95
 Polar relay, Western Union 41C, adjustable, used good. \$1.95
 Relay Dunco, 6 VDC coil, cont. 1A, 1B, 1C sealed. 35c ea. 3 \$1
 Relay Dunco 8HXN 115 60 coil, spst rd 30a. \$1.95
 Power Xfmr. Herm. sld. Pri: 115v 50-240vac Seed: 680v 3 11ma; 700v @ 70ma; 6.3v @ 11amp & 6.3v @ 3amp. \$3.25
 Choke, AF Herm. sld. 12hy 150 ma 210 ohm. \$1.95
 Step Down Xfmr 115/60 to 38 v @ 1.73 a, herm sealed \$1.25
 SPRAGUE HY-pass—cap. 0.1 mf 400 v #80PL 35c, 3 \$1.00
 Oil Capacitor 8mf 600vdc w/mtg bkts. 85c ea. 2 \$1.60
 2mf 6001vdc, 40c, 4 \$1.50 1mf 1000 vdcw, 55c, 2 \$1.00
 1mf 400vdcw. 30c ea. 4 \$1.00
 Micro Switch, interlock ass'y. #1AC1. 95c
 Micro Switch, #1BZ-R31, Norm. open or closed. 35c ea. 3 \$1
 Ohmite Power switch, 6 taps, rd 15amp @ 150vac. \$1.50
 GE interlock switch, push button, momentary cont. 25c, 5 \$1
 Rotary canopy type switch, A I&H DPST 3A 125V, 25c, 5 \$3.95
 Meter, Panel, scale 0-2.5KV, 0-1ma mm, 3" rd. \$3.95
 Pilot Lite Dialco DP-30, red, dimmer type. 35c ea. 3 \$1.00
 Fuse Extractor posts, Buss HCM for IAG fuse, 25c, ea. 5 \$1
 Mike Receptacle 4amp 80MCF @ 28c

SATISFACTION GTD. OR YOUR MONEY BACK

Please include sufficient postage—excess refunded immediately

MILE SUPPLY CO.

P. O. Box 23, Ft. George Sta., New York 40, N. Y.

HAM LICENSE COURSES

Resident Classes—3 Evenings a Week. Thorough preparation in Code and Theory. Qualifies for NOVICE CLASS in 4 Weeks and for GENERAL CLASS in 2 Months.

Dept. C, DELEHANTY INSTITUTE


117 East 11 St., N.Y. 3—Phone GR 3-6900

New! Telrex "Spiralray"

Extremely high-gain, high signal-to-noise, practically no fade, all radiation planes—horizontal, vertical or oblique! Ideal for scatter-wave, satellite, mobile or point to point work! 50, 108 and 144 megacycle models available

TELREX LABORATORIES

ASBURY PARK 40, NEW JERSEY, U.S.A.



FOR SALE (Cont'd.)

SELL: Hammarlund HQ-110C with clock \$200. W2LPC 51 Elmira St., Hicksville, (L. I.) N. Y.

ALUMINUM for every ham need. Write to Dick's, 67 Cherry Avenue, Tiffin, Ohio for list of tubing, angle, channel, castings, plain and perforated sheet, and complete beam kits.

FREE bulletin—transistor dollar days. Texas Instruments 2N1380, \$1.00, Power transistor \$1.00, diodes-two for \$1.00, IRC Silicon Rectifier Handbook—\$1.50, Basic Theory and Applications of Transistors—\$2.00, Transistor Audio Transformers (driver and output) \$1.50 each, \$2.50 a matched set, printed circuit boards (converter, keyer grid dipper, transmitter and many others. Write for complete list. SEMICONDUCTORS 'n' STUFF, P.O. Box 288, Alta Loma, Calif.

SELL complete set CQ. Volume 1 number 1 thru 1959, 15 years. Perfect. \$100.00 express collect. Also bound volumes 1947-1948, 1949. \$11.00 each prepaid. Potter 2333 East Avenue, Parkridge, Illinois.

HIGHLY EFFECTIVE review for FCC commercial phonexams. Free literature. Wallace Cook, Box 10634J, Jackson 9, Mississippi.

JOHNSON PACEMAKER, like new, \$285.00. Major H. Zirjacks, W5RJR, Post Signal, Ft. Sam Houston, Texas. SSBers! Keep up with SSB news and views! Join the Single Sideband Amateur Radio Association, dedicated to furthering good SSB operating; promoting advancement of SSB equipment; and disseminating SSB technical information. Read "The Sidebander," official publication of the SSBARA. Dues \$3 yearly. Write for membership application, sample "Sidebander," to SSBARA, 12 Elm St., Lynbrook, N. Y.

FOR SALE: Collins 12 Volt transistor power supply 516-1 and Mobile Mount 351D-1 for KWM 1 \$225. B&W 51SB New condition \$165. Johnson Kilowatt with desk brand new, never used \$1295. Central Electronics sideband slicer model "B" \$65. APR-4 receiver covers 74 MCS to 1000 MCS \$149. Morrow receiver and transmitter, portable—mobile, complete \$475. Mobile mount, whip and 10 to 80 meter coil \$19. Precise oscilloscope #300 875. KWM1 SER #709 \$595. AC Supply \$85. Eldico TFP \$55. Simpson Model 479 Signal and sweep generator \$195. S. Gogel, 10966 Laux Place, No. Bellmore, L. I., N. Y. SUnset 1-0568.

VHF Journal/Comments on 50mc and above by KH6UK, K4PEV, LU3DCA, W2AZL, KL7AUV, and many more! World's only VHF magazine—published monthly. Send \$1.00 for six big issues . . . "QSO", 67 Russell, Rahway, N. J.

GLOBE SCOUT 680A and Knight VFO, both W T, 2 months old. Need college funds. \$130 takes both. K0QPG, 825 37th Ave. Winona, Minnesota.

ATTENTION HAMS! Receivers, transmitters, and test equipment serviced and calibrated by professional personnel. Low rates. All work guaranteed! Also kits wired to order at 33 1/3% of list price. Write: Monarch Engineering, 3058 Lehman, Hamtramck, Michigan.

CANADIANS: Telrex Monarch Tri-Bander Beam with modification kit and balun. \$200.00. Heathkit Seneca VHF Transmitter, wired and tested used only once. \$175.00. Gonsert, 2 meter Communicator III with microphone and six crystals. \$200.00. Hallcrafters, SX100 Receiver, Mark II. \$275.00. Martin Rosenthal, VESMR, P. O. Box 508, Station "F", Toronto 5, Ontario, Canada.

FOR SALE: Globe Linear, LA1, excellent condition, factory wired. Used little. \$100 plus shipping. K2ODN, 2 White Horse Pike, Haddon Heights, N. J.

FOR SALE: ELDICO SSB-100 Good condition \$325. Collins 32V2 Excellent condition \$325. 75M. Mobile transmitter, complete 300 watts input. 12 VDC power supply built to commercial standards. \$145. Richard Wilds, K6OHJ, 3671 23rd Street, San Francisco, Calif.

GSB-100 SSB transmitter Model 3233—new—perfect condition cash \$450.00. K9CPW 5037 Olympia, Chicago 31, Ill.

FOR SALE: KWM-1 AC DC power supplies mobile mount none blander TRI band Heli whip. All manuals and cables FOB \$1050.00. D. H. McIntyre, W2KYH, 17 Randolph Place, Ridgewood, N. J.

FOR SALE: Globe Chief 90w. transmitter, never used, didn't get license. Best offer or first \$40. Ken Johnston, 30 Bay State Road, Boston 15, Mass.

RECONDITIONED EQUIPMENT: World Radio Laboratories—TERMS—TRIALS! New Guarantee!—HIGH FREQUENCY—Aerotron 500 \$159.00; Black Widow 2M \$150.00; Transcon 6 \$69.50; Eldico MT-2 \$19.95; Gonsert 3024 \$39.00; Gonsert 6M Linear \$109.00; Communicators inquire: Gonsert 3226 VFO \$54.95; SR-34C \$295.00; 6N2 \$129.00; Johnson 2M VFO \$119.95; L&W 6M #50 \$39.50; Sonar MB-26 \$39.50; Tapetown XC50 \$44.50; Teacraft CC5-50 \$24.50;

REGULAR HAM SPECIALS 5100B \$379.00; 51SB-B 75.00; 20A \$189.00; 600L \$349.00; 32V-3 \$485.00; Elenco \$369.00; SX-96 \$189.00; SX-101 \$319.00; DX-20 \$34.50; F-1 \$7.95; Viking II \$219.00; Pacemaker \$385.00; NC-98 \$14.00; NC-183D \$309.00; NC-300 \$269.00; Vocaline JRC-10 Transceiver pair \$39.50 while they last. Leo, W0GFG, ex 811, Council Bluffs, Iowa.

OR SALE: Mosley 80-40 meter Vertical. \$100.00 value. est offer over \$60.00. Local Sale, will not ship. Box JS, Q Magazine, 300 West 43 St., NYC 36.

OR SALE: Harristahl NE-6 6 meter transmitters. Have about ten units. Reasonable price. Write W2ZGA, Harrison, 260 Marlboro Road, Brooklyn, N. Y.

OR SALE: E-Z Way 65' 3 section Crankup tower in early new condition. Expanded head for any rotator. el 20 meter beam new, constructed with Cesco hardware. 3 el Hy-Gain 10 meter beam. 250' of RG-8/U Coax cables, 150' 8 conductor plastic covered rotator control cable. Paid \$650.00 for this just a few months ago. Moving. Must sell. Package deal for just \$400.00 or \$350.00 if you take it apart yourself. K2IEG, Barry, 521 Ocean Parkway, Brooklyn, N. Y. Will not ship. UL 3-9800 after 6 pm.

ELL: Motorola FMTR-41V(AF) 1D single case front mount 30 to 50 mc with mike and cables. Ralph Villers, Box 1, Steubenville, Ohio.

WANTED

WANTED: Military and Commercial laboratory test and measuring equipment. Electronicraft, Box 399, Mount Kisco, N. Y.

WANTED TRADES NEW AND USED: KWS-1 \$1250.00, 2S-1 \$590.00, 75S1 \$495.00, 32V2 \$350.00, HQ100 \$149.50, HQ110 \$209.00, HQ129 \$129.00, HQ145 \$269.00, HQ160 \$379.00, HQ170 \$359.00, Johnson Mobile \$75.00, Thunderbolt \$589.50, Valiant \$439.50, Johnson Citizen Messenger \$139.75, Courier \$289.50, Hallierafters 101 Mark III \$395.00, HT33 new \$495.00, SX99 \$119.00, SX100 \$295.00, HT32A \$695.00, S107 \$94.95, NC125 \$139.00, NC183D \$319.50, NC173 \$139.50, NC57 \$69.00, SW54 \$35.00, CB100 Citizen \$125.95, Globe King 500A \$425 90 Chief \$49.50, 90A \$54.95, 580 \$94.95, 680A \$97.95, DSB100 \$129.95, VFO755 \$42.95, NC300 \$299.95, NC2400 \$169.50, CE20A \$195.00, 10B \$139.50, CE Slicer \$37.50, WQ Multiplier \$59.95, Heath DX35 \$54.95, AT-1 \$23.50, DX20 \$34.50. Easy terms, Ken-Eds Radio Supply, 4208 Central Avenue, Fort Dodge, Iowa, or 128 31st Street NE, Cedar Rapids, Iowa.

WANTED: TELETYPE TG-7 and Model 15 and parts, printers and reperforators, etc.; COMMNS REC'VRS AND XMTRS, e.g. BC-610-E, -I, BC-399A, Collins 51J, 17L3, -4; R-388 and R-390/URR; 18S-2, -3; ARN-14 and -30; APR-9, -10, ARC-21, 27, etc.; APS-31, -33; and TEST EQP'T, with TS- or 1- prefix. We pay freight. AMBER INDUSTRIAL CORP., 75 Varick St., N. Y. 13, N. Y.

WANTED: Model engines, any make or condition. State price. K8AOJ, Arthur Ryan, 31770 Junction, Farmington, Michigan.

WANTED: Meter for LR-1 frequency meter. Somebody somewhere must have one of these. White Wayne Green, CQ Magazine, 300 West 43 Street, N. Y. 36.

WANTED: Collins 32V3, factory built, no modifications from earlier models. Must be in A-1 cond. State lowest cash price. Bill Garrett, 1021 E. Scottwood Ave., Flint 7, Mich.

WANT: Smallest sized generator possible about 500 watts. Similar to Bendix. 110 volts a.c. 60 cycles. Want to mount it in Volkswagen. Will answer all letters. Frank Smith, W8HMT RFD #3 Paw Paw, Michigan.

GUNS wanted. Trade my ham gear for them. W2LJU.

WANTED TO BUY: Scott Philharmonic Radio or any similar model Scott all-wave radio; McMurdo silver masterpiece IV or V. State mechanical and electrical condition, model, price. Incomplete radios or lacking cabinets considered. Jack Rhodes, 1880 Juniper St., Prince George, B. C., Canada.


WANTED: Driver Transformer PP6L6 to PP 8IIA, Modulation Transformer PPSIIA to 4-250A Black Widow 6 or 2 meter or Gonset Modulator splatter choke. Prefer In-Person deal all letters answered. John Jackman, Devonshire Road, Milford, Conn.

WANTED: Used heavy duty antenna rotor. Send price: full details air mail. Edgar Cole, American Schools, APO 381, San Francisco, Calif.

WANTED: Transmitting Tubes, 4-1000A, 4-400A, PL-172A 450th, 750th, 1000T, Transformers, 4000 volts each side or above at 500 MA CCS or better, 220 or 110 Volt single Phase Primaries. Also want Vacuum variables, 575A tubes, sockets, variacs, 220V 20 amps or more. State price and whether or not you will ship. Pick up within 40 miles of NYC. Box BB, CQ, 300 West 43 Street, N. Y. 36, N. Y.

RADIO SHACK flash!

Send Coupon for Latest
FREE
ELECTRONICS Catalog
plus every new issue for 1960



Act today! See the newest, the best, the most complete lines of electronic equipment in America—stereo, hi-fi, ham radio, LP records, tapes, optical goods and scores of others. Over 100,000 items—everything for the amateur, the pro, the devotee or just the interested.

Mail the coupon now! We will send you immediately, Free and Postpaid, not only our latest 312 page Electronic Catalog but every new issue for next 12 months—a full year's Free subscription to the finest in electronics and associated products all at famous money-saving Radio Shack prices. Satisfaction guaranteed on every order or your money back.

RADIO SHACK
CORPORATION Dept. 60B21
730 Commonwealth Ave.
Boston 17, Massachusetts

Just one of thousands of
RADIO SHACK buys

Transistor
Battery Radio
19.95 Value
only
\$9.95

Exclusive Radio Shack transistor battery radio. Only 2½x4x1¼ inches in size. Weighs less than 10 ounces. Built-in speaker and ferrite antenna. Conelrad markings, handsome molded case.

Radio Shack Corporation Dept. 60B21
730 Commonwealth Ave.
Boston 17, Massachusetts


Please send me, FREE and POSTPAID, your latest Electronic Catalog. Also send me every new issue for the next 12 months—a full year's subscription FREE.

Name _____

Address _____

Postoffice or City _____ Zone _____ State _____

ROHN "fold-over" TOWERS*

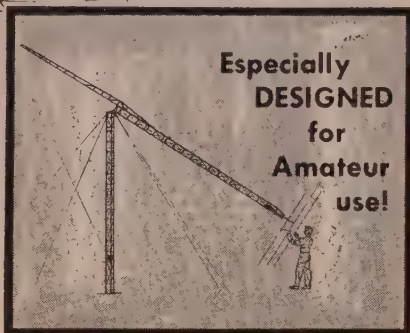

**Especially
DESIGNED
for
Amateur
use!**

first IN DESIGN foremost IN SALES

ROHN "fold-over" towers are ESPECIALLY made for amateur use. They are the most practical tower in design because they allow you to work ON THE GROUND for antenna maintenance and servicing. You'll quickly agree that this is a most wonderful feature for an amateur tower. In addition, these towers are made and designed for true, heavy duty use. They are structurally sturdy for use up to 70 feet and in enough sizes for all types and sizes of amateur antennae. This means that they can easily handle your requirements. They have unexcelled workmanship. They are hot-dipped galvanized after fabrication which means you have no problem of maintenance. They come as a complete package with all materials and accessories included. Add all these wonderful features together and you see why they're the most demanded tower today! Priced from \$186.

FREE literature and near source of supply gladly sent. Be Sure you investigate ROHN towers before buying!

*Patent—2,875,865

ROHN Manufacturing Company

116 Limestone, Bellevue • Peoria, Illinois
"World's largest exclusive manufacturer
of TV-Communication towers"

For further information, check number 50 on page 126.

**STILL ONE OF THE FINEST RECEIVERS EVER
MANUFACTURED**



COLLINS 75A-4

A limited supply still available
for \$695 at

Amateur Electronic Supply
3832 W. Lisbon Ave.
Milwaukee 8, Wisconsin
Phone: West 3-3262

Harris Radio Corporation
289 N. Main Street
Fond du Lac, Wisconsin
Phone: Walnut 2-4670

WANTED (Cont'd.)

WANTED: All types of receivers transmitters, test equipment & teletype, in trade for NEW Hallcrafters, Hammarlund, Johnson, National, Central Electronics, etc. Collins 51J2 \$495., 75A-1 \$239., 75A-4 \$595., Hallcrafters SX-10 \$225., SX-101 Mk 111A \$295., SX-99, \$109. SX-71 \$169. National NC-60 \$45. NC-188 \$109. NC-109 \$139., Eldico SSB 100F \$495. Teletype converters, printers, etc. Write Tom WIAFN, Alltronics-Howard Co. Box 19, Boston 1, Mass. (Richmond 2-0048). Store: 60 Spring St., Newport R. I.

SWAP OR SELL

BOUGHT Aug., '59 \$500.00 Model Radio Control commercial equipment-6-3-channel rcvr's servo's, mitter, etc. Long list—Want good ham rcvr NC-303, etc. Class or any good offer's—No junk. Sam Faziani-W8JXN, 1140 Maple Blvd. Monroe, Mich. PH-CH-1-4342.

QSL

CHEAPY's. "Fill 'em in yourself." 100-\$1.00, 200-\$1.75, 500-\$4.00, 1000-\$7.75 Postpaid. Free sample. QSL Coop., Box 5938, Kansas City 11, Missouri.

QSLs??? LARGEST variety samples 25¢ (refundable). **CALLBOOKS** \$5.00. Religious QSL samples 10¢. Sackers, W8DED, Holland, Michigan.

QSLs-SWLs: 100 two color glossy \$3.00; QSO file cards \$1.00 per 100; Samples 10¢. Rusprint, Box 7507, Kansas City 16, Missouri.

QSL's-2 and 3 colors. Kromekote, Attractive, Distinctive. Different, 48-Hour service. Sample 10¢ K2VOB Press, 625 Midland Boulevard, Maplewood, New Jersey.

GLOSSY 3-color QSL cards 100—\$4.50. Free sampler. Rutgers Vari-Typing Service, 7 Fairfield Road, New Brunswick, N. J.

QSL's? Samples 25¢ (refundable). W6CMN, 6707 Berke Ave., North Hollywood, Calif.

QSL-SWL: \$1.00 per 100. Samples dime. Riesland, W6HTN, Del Mar, Calif.

CREATIVE QSL CARDS. Personal attention given. Free samples and catalogue. Bob Wilkins, Jr., Box 1064-2, Atascadero, California.

QSL's-SWL's. Sample free. W4BKT Press, McKenzie, Tennessee.

QSL's, SWL's, XYL-OM's. (Sample assortment approximately 9% c.) Covering designing, planning, printing, arranging, mailing, eye-catching, comic sedate, fantabulous, DX-attracting, prototypal, snazzy, unparagoned cards. (Wow!) Rogers KØAAB, 737 Lincoln Avenue, St. Paul 5, Minnesota.

QSL's, SWL's, REASONABLE. PAYE, W4ZKK. 824 AVANDALE, COCOA, FLORIDA.

QSLs. Samples Free. Phillips, W7HRG, 1708 Bridge Street, The Dalles, Oregon.

QSL's—"Brownie" W3CJI, 3110 Lehigh, Allentown, Pa. Samples, 10¢, with catalogue, 25¢.

QSL-SWL. Samples free. Bolles, W5OWC, 7701 Tisdale, Austin, Texas.

QSL's: Samples, dime. Print Shop, Corwith, Iowa.

QSL's-SWL's: That are different, colored, embossed card stock, and "Kromekote." Samples 10¢. K8AIA, Box 953, Hamilton, Ohio.

QSL's-SWL's, samples 10¢. Malgo Press, 1937 Glendale Avenue, Toledo 14, Ohio.

QSL's. Samples 15¢. Sims, 3227 Missouri Ave., St. Louis 18, Mo.

MISCELLANEOUS

FOURTH STUPENDOUS YEAR — Broward Amateur Radio Club's Get-Together and Auction. Doors open 9 A.M. Lunch at noon, auctioning 1 P.M. Armory, S. W. 24th St. and 4th Ave., Ft. Lauderdale, Fla., Saturday, Feb. 13.

PRESERVE YOUR HAM TICKET. Social Security Card, small photo, passes and anything else of value that is wallet-size. We will laminate it in clear plastic, guaranteed for life. Lamination will prevent it from getting torn, soiled or frayed. Send your ticket or anything of value with \$1 in stamps or cash for each item that you want preserved. 24-hour service. Send to Dept. HW, CQ Magazine, 300 West 43rd St., New York 36, N. Y.

TWO-COLOR CERTIFICATE. Attests to tongue-in-cheek ownership of one acre of the moon. Ideal gift or for wall of club, shack, bar or room. Name and call inscribed free. \$1.00 each, 6 for \$5.00. Box G, 1738 201 St. Bayside 60, N. Y. Check or M.O. only.

HAMS: Learn Calculus or algebra. Powerful modern mathematics. Easy practical lessons, first four \$1. Mathco, 4256-5 Minmor, Cincinnati 17, Ohio.

WYOMING SUMMER JOB for man with General Ticket. Teacher, graduate student or college upper classman. Single man. Assist with radio club at Teton Valley Ranch. Good technician. Keep contact between ranches and pack trips. Contact: W. S. Wilson, 2619 Oak Knoll Ave., San Marino, California."

ANNOUNCE [from page 22]

Send checks for reservations to SSEARA, care of Mike Le Vine, WA2BLH, 33 Allen Road, Rockville Centre, L. I., N. Y.

East Coast VHF Dinner

The East Coast VHF Society Inc. announces it's 2nd annual Dinner and Ham-fest in the grand ballroom of the Hotel Alexander Hamilton, Paterson, New Jersey, Sunday evening, February 21, 1966. It will feature guest speakers on your favorite topic, more prizes than you have ever seen, more scuttle butt than you have ever heard, more food than you can eat and more friends than you ever thought you had. The dinner starts at 8 P.M. promptly with live music throughout dinner. All this for only \$5.00. Make your reservations now because tickets will not be sold at the door! Deadline February 14, 1966. Tickets are available from any of our members or write to: Nick Franetovich, W2SWI, 100 Surrey Lane, River Edge, N. J.

Rotarian Hams

Now hear this!! All hams who are Rotarians please contact:

Byron C. Sharpe, W9JKC
634 Vernon Avenue
Gencoe, Illinois


Byron is trying to compile a complete listing of all Rotarian hams.

Santa Fe Ry. Amateur Radio

The Santa Fe Railway Employees Amateur Radio Club, organized on December 3, 1958 in San Bernardino, has grown to a total of 117 members in twelve states, and are still growing.

Shown is a sample certificate which will be issued to any amateur who works with five members and who has the contacts confirmed by QSL cards.

QSL cards confirming the five contacts should be mailed to Secretary-Treasurer, W. E. Courtney, 1169 Crestview

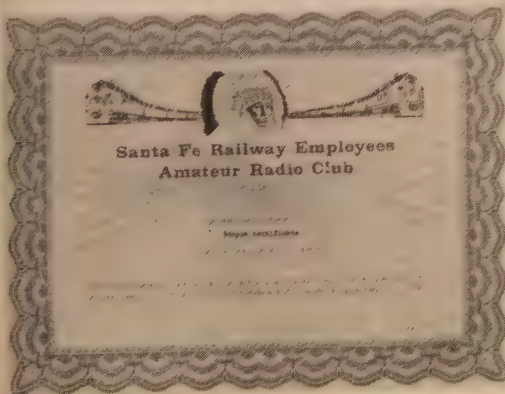

Ave., San Bernardino, Calif., whose call is WA6BGI, together with a stamped self-addressed envelope for return of the cards, and four 3¢ stamps for handling the certificate.

Crowley, La.

The Acadia Amateur Radio Club, Crowley, Louisiana, was officially organized on September 2, 1959. Operating frequency for club net use, tentatively adopted, is 3975 kc each Sunday morning 9500-10000 CST. It is planned to establish an alternate frequency on 40 meters.



**RADIOTELEPHONE
LICENSE
MANUAL \$500**

In one convenient volume, complete study-guide questions with clear, concise answers for preparation for all USA commercial radiotelephone operator's license examinations.

RADIO HANDBOOK, GIANT 15th EDITION. A one-volume library of radio information, with extensive, simplified theory. Detailed how-to-build-it data on dozens of items of practical radio equipment\$7.50*

WORLD'S RADIO TUBES (Brans' Radio Tubes Vade Mecum) World's most authoritative tube book.....\$5.00*

WORLD'S EQUIVALENT TUBES (Brans' Equivalent Tubes Vade Mecum) Over 32,900 comparisons\$5.00*

SURPLUS RADIO CONVERSION MANUAL. VOL. I. Practical conversions. Write for list of contents.\$2.50*

SURPLUS RADIO CONVERSION MANUAL. VOL. II. Companion to Volume I.\$2.50*



BUY FROM YOUR DISTRIBUTOR
Add 10% on direct mail orders to
EDITORS and ENGINEERS, Ltd.
Summerland California

For further information, check number 52 on page 126.

READ THIS!

Even if a quad is home made, if it is properly constructed and properly tuned, it's performance is outstanding. That is why they are becoming more and more popular.

You can usually tell a quad by the steadiness and consistency of the signal. It has a "punch" to it seldom equalled by other types.

The **SKYLANE** 3 band quad sells for only—
\$59.95

We believe it is the best buy in a beam on the amateur market today. Write for **FREE BROCHURE**

SKYLANE PRODUCTS

406 Bon Air Temple Terrace Tampa 10, Florida



RF Wattmeter Field Strength Meter

Citizen's Band Amateur
This wattmeter contains a 50-ohm dummy load and is calibrated to 10 watts. It connects directly to your transmitter and reads the exact power output, allowing you to tune your transmitter precisely. The Field Strength Meter function can be used for the tuning of all transmitters and for antenna measurements. Covers all amateur bands up to 150 mc. Phone jack for monitoring your transmissions; check for modulation percentage and distortion. This is one of the handiest test instruments for any ham shack and is absolutely basic for the Citizen's Banders who must get every last watt out of their low power rigs.

Complete, ready to use, with instructions. Net: **\$11.95**

Precision Communications Accessories
P. O. Box 141 • Rockaway Park 94, L. I., N. Y.

G4ZU

G4ZU Pats.

BEAMS AND ACCESSORIES

The word is getting around. The G4ZU Super CoAx Fed Minibeam is a "hot beam". The BiNodal Coupler giving collinear effects on 10 meters make this tri-band has NO COILS AND NO TRAPS for electrical lengthening. This 16 pound gem is made of High Tensile Aluminum Alloy and was engineered to give maximum efficiency on ten and fifteen meters rather than mediocre performance on all three. A turning radius of 13 1/2 inches makes this beam possible on any 30 ft. city lot without drooping on the neighbors. The broadbanding feature alone makes the beam worth our price, \$89.50. A fine fool proof rotating telescopic mast 34' high, one man raised and installed, \$49.50. Five ft. rugged tripod and 10 ft. mast \$17.50. Conversion kits for the old open wire models \$39.95.

HOUSE OF ANTENNAS

1153 East 82nd Street • Tel. 50 8-9282
Master Service Company (see pg for ad on "CAGE")




VIBRO-KEYER

Only \$15.95

The Vibroplex Company has a boon for those amateurs that need the mechanical end of an electronic keyer. The Vibro-Keyer is constructed in line with the high-quality workmanship for which Vibroplex has long been famous. The unit has large, non-corroding contacts, heavy beige colored base, colorful red finger and thumb pieces, and smooth, easy operating trunion lever. It is adjustable to any amateur's taste. Only \$15.95.
THE VIBROPLEX CO., INC., 833 Broadway, N. Y. 3, N. Y.

ALL BAND TRAP ANTENNA!



Reduces interference and Noise on All Makes Short Wave Receivers. Makes World Wide Reception Stronger, Clearer on All Bands!

For ALL Amateur Trans-300 Watts Power for Pi-Net or Link Direct Feed. Light, Neat, Weatherproof mitters. Guaranteed for

Complete as shown total length 102 ft. with 87 ft. of 72 ohm balanced feedline. Hi-impact molded resonant traps. (Wt. 3 oz. 1' x 5" long). You just tune to desired band for beamlike results. Excellent for ALL world-wide short-wave receivers and amateur transmitters. For NOVICE AND ALL CLASS AMATEURS! NO EXTRA TUNERS OR GADGETS NEEDED! Eliminates 5 separate antennas with excellent performance guaranteed. NO HAY-WIRE HOUSE APPEARANCE! EASY INSTALLATION!
80-40-20-15-10 meter bands. Complete. \$12.95
40-20-15-10 meter bands. 54-ft. ant. (best for w-w swl's) \$11.95
20-15-10 meter bands. Dual Trap. 24-ft. antenna. \$18.95
SEND ONLY \$3.00 (cash, ck., mo) and pay postman balance COD plus postage on arrival or send full price for postpaid delivery. Available only from:

WESTERN RADIO • Dept. AC-2 • Kearney, Nebraska

The officers of said club are as follows:
K5ANN, John Webb, President.
K5JRK, Kenneth Holloway, Vice President.
W5BMN, Dr. J. D. Hains, Treasurer.
W5ARZ, J. A. Soto, Secretary.
W5VDG, Ralph Gonthier, Activities Manager.
Also Emergency Coordinator for this area, as appointed by ARRL.

Apple City Certificate

The Apple City Radio Club of Wenatchee, Washington, "The Apple Capital of the World," offers a certificate attesting to an associate membership in the "Apple Net." Five contacts are required with member stations on the ten meter band. The certificate is also available for test ACRC contacts on 3980 kcs. Send log extracts to Al Freeman, W7ETO, 1031 Lindy Street, Wenatchee, Washington. Presently active on ten are—W7's DLI, EQJ, ETO, HQQ, OVE, ZGH, and K7's ABH, ABI, ABJ, and APJ.

LETTERS [from page 20]

A foreigner can come to the U.S. and get a license to carry a gun, and to operate that most lethal machine—the automobile. Operating a ham radio station could be another step in our national program of fostering international friendship and understanding.
Let us hope that you too will continue to actively advocate reciprocal licensing and operation.

73, Clement R. Coggin, W4MXU

Phone Patches

Dear Wayne,

I've been running a kw on SSB, 10 through 80, specializing in 15 & 75. I like to run phone patches, but have been running into trouble with RF feedback. Not much, but enough. And, as a side consequence, when I am transmitting others in the house hear me on the phone. So I took my life in my hands and called the phone company.

To make a most interesting story real short, you cannot at present run 100% successful phone patches with no trace of rf using the new modern type 500 telephone. They pick up rf and rectify it in the new type of equalizer circuit built into them. The other type, model 300, in use since WWII, does not do this. As a result, if you have any 500 type phones you can expect difficulties.

They tried all sorts of filters, by-pass condensers, etc. etc. We built the project into practically a national emergency with the result that there is now an official inquiry regarding the 500 phones for the research headquarters in Camden, N. J. to mull over and a possibility that tariffs may be set up for these devices, which will, once and for all, legalize them beyond any question.


Irvin M. Hoff, K8DKC
Ann Arbor, Michigan

Dear Wayne,

A couple of us hams here in Dallas would like to start an Inter-state Texas net. All the novice hams here in Texas are welcome to join. We'd prefer they run at least 50 watts. We thought this would be a good idea because so many hams want to get traffic in to Texas. I'd appreciate it very much if you would publish this because we do need a little help. We're gonna call ourselves the "Hotwines." All the information is below. I'd be much obliged es Tnx 73,
Time: 5:00 pm CST
Band, Freq = 40m 7.170 mc-7.173 mc
Power = 50 watts at least.

Write to Jerry Chouinard, 6631 American Way, Dallas, Tex. for information on joining and handling of traffic.

Jerry Chouinard

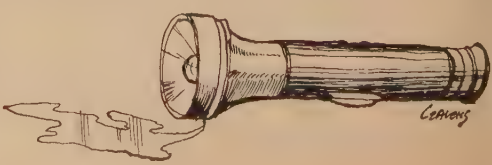

therwise one side of the receiver chassis will be hot, and thus the *if* amplifier and the converter chassis will be also. Almost all inexpensive *ac/dc* receivers have the chassis floating, but it may pay you to check the diagram and make sure.

Alignment

Aligning the *if* amplifier is very easy. After you have connected the various units together, tune one receiver to the middle of the band which your converter covers. Then adjust the slug in the amplifiers output coil for maximum indication on your "S" meter. If your receiver does not have an "S" meter tune the slug for maximum noise as heard in the speaker. The adjustment is very broad and you may not notice a large difference as you vary the slug in and out.

In some way, the *if* amplifier is of greater help in *vhf* work than is an *rf* amplifier ahead of the converter. This is due to the tube noise and other factors found at the higher frequencies. Some *rf* amplifiers have as much increase in noise in their outputs as they do signal. This is particularly true of the 50 *mc*, 6 meter band. After the frequency has been converted from *vhf* down to the frequency tuned by your receiver, it is easier to get signal amplification without a high noise level.

In tests run on the *if* amplifier shown, which was built to operate between a 6 meter converter and a Hallicrafter SX-99 receiver, the signal was increase 12 *db* (average) while the noise increased only 6 *db*! When the amplifier was used with less sensitive receivers, the increase was even greater. Adding this unit to your *vhf* equipment will help you "dig down in the noise" and get those weak signals. ■

HAM SHACKLES [from page 35]

When the necessity of a household move arises, average people will have to take the following viewpoints into consideration: Is the place comfortable? Is the house in a nice neighborhood? Is it close to shopping areas and schools? Is the kitchen practical? Are the rooms sunny? etc.

Not the ham family. When we move, only two things count: Is there space enough for a hamshack? Where can we put the doublet antenna and the three element wide-spread rotary beam?

Or look at the poor, unfortunate women whose husbands have hobbies which take them away from home and family, thereby endangering the spirit of togetherness! We XYLs don't have to worry about that. Our husbands are always home, at least physically. Why, if it weren't for an occasional ham fest or con-

The Battery That's Used in Guided Missiles Now Released as Government Surplus



For Photography, Aircraft, Models, \$1.95 ea. Searchlights, Radios, etc. Ppd.

Sintered-plate Nickel-Cadmium alkaline storage batteries designed for "Nike" Missile and now surplus due to design change. A lifetime battery with no known limit of service (over 5000 recharges on test without loss of capacity). Other features: Virtually indestructible, compact and lightweight, withstands heavy shock and vibration. Flat voltage curve during discharge, retains charge year or more, high discharge rate up to 50 amps. for this cell, no corrosive fumes to harm clothing or equipment, spill-proof construction, discharge to any position, indefinite storage without deterioration, operates in temperatures of -60° F. to +200° F. Each cell is approx. 6 ampere hour capacity, nominal voltage per cell is 1.2 volts. (A 6 V. battery requires 5 cells.) Cell size 6" H. x 2" W. x 1 1/2" T. Wt. 6 oz. ea. Uses time service. Add only distilled water once a year. A fraction of Government cost.

Potassium-Hydroxide (30%) electrolyte. Negligible loss during time service. Add only distilled water once a year. A fraction of Government cost.


Used Test Cells \$1.95 ea. Postpaid
Brand New Cells 2.95 ea. Postpaid

24 V Battery (20 cells) in metal case. Used \$40.00. New \$60.00. All cells guaranteed to your satisfaction or money refunded (less Postage). Plastic battery cases may have slight cracks—repaired easily with household cement or you may add 25¢ to price of each to insure uncracked cases.

ESSE RADIO CO., Dept. D8

42 W. South Street Indianapolis 25, Ind.

AMAZING NEW VIBROPLEX

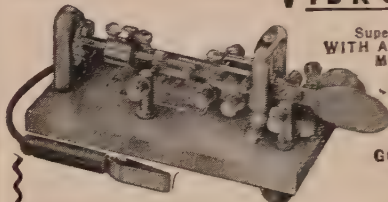

Super DeLuxe
WITH ADJUSTABLE
MAIN SPRING
AND OTHER
GREAT
FEATURES

24-K
GOLD-PLATED
BASE TOP

PRESENTATION MODEL

Vibroplex presents the first really speed control key. An adjustable main spring permits operator to send slower or faster as desired. No more muddy signals... no sacrifice of signal quality. Suits any hand or any style of sending. Free of arm tension. Sends easily as pressing a button. Praised by operators and beginners alike. Try this new Vibroplex key! You'll be delighted. Other new popular Vibroplex keys from \$15.95 up. At your dealer or THE VIBROPLEX CO., INC. 833 Broadway, N. Y. 3, N. Y.

2-Way Citizen Band Crystals

UNCONDITIONAL GUARANTEE



\$3.00 ea.

243, Pins Optional, Hermetic Seals.

AMERICAN CRYSTAL CO.

P. O. Box 2366

Kansas City 42, Mo.



NEW EDITION
NOW ALSO COVERS TVI FROM
THE CITIZEN'S BAND
\$1.75 IN USA, \$2.00 FOREIGN
AT YOUR FAVORITE DEALER
OR DIRECT FROM

NELSON PUBLISHING COMPANY
REDDING RIDGE, CONN.

G4ZU

G4ZU Pats.

BIRDCAGE NEWS

Have you ever dreamed of a full 40 meter beam that you could erect on a 30 ft. city lot and swing 360 degrees. NO COILS. NO TRAPS. NO COMPROMISES. Developed by engineering concepts as fresh as those used in interplanetary travel. The revolutionary beams will come in a full line, the intended successor being a 20 meter beam with a radius of less than six feet. Then the forty with a radius of less than ten feet—followed by a 20, 40 and a 15, 20, 40 in the future. All will have high forward gain, F B ratios and how VSWR. The 20 meter beam will be out very soon. If these general specifications hold your fascination, don't buy until you get the specifications. THESE BEAMS ARE NOT A TOY but engineered with sound understanding of antennas and what they should do. Lightweight & moderately priced.

HOUSE OF ANTENNAS

1153 East 82nd Street • Tel. SO 8-9282

Master Service Co., W9HGV Bill K90HL Dick, Chicago 19, Ill.



IF YOUR TOWER AIN'T GOT
DIAGONAL BRACING

It Ain't Got

*** IT**

INERT TORSIONAL QUALITY

"Diagonal bracing resists twisting caused by constant starting and stopping of large rotary beams. Also twisting of tower caused by gusty winds . . . All E-Z Way Towers got "IT Q".

Write for free literature!

E-Z Way Towers

P. O. Box 5491 Tampa, Florida

CALL LETTER—decals

Designed for Auto Windshields. 1 1/2 inches high. Gold with black border. Just 75c for one set, 2 sets for \$1.25.

BOX "CC" c/o CQ Magazine

300 W. 43 St., N. Y. 36, N. Y.

New FREE CATALOG

• Big New Catalog for 1960 . . . just out! Lists hundreds of real buys and bargains you won't want to miss! Write for your free copy today!

FAIR RADIO SALES

P. O. BOX 1105

LIMA, OHIO

CERTIFICATE SEEKERS

Claim an acre of the Moon's surface! Choice acreage left in the Mare Imbrum, the Moon's largest known crater. Authentic-looking, two-color gag certificates with gold seal only \$1.00 each with name and call inscribed free. Six for \$5.00. Check or M. O. only.

BOX DXG

1738-201 St., Bayside 60, N. Y.

"HOW TO MAKE MONEY IN Mobile-Radio Maintenance"

AUTHORITATIVE GUIDESBOOK
ABOUT THE BIZ • A - C • WHAT MOBILE-RADIO
GIVES FACTS FIGURES PAY RATES
WRITE TODAY!

FREE

LAMPKIN LABORATORIES, INC. Electronic Div. BRADENTON, FLA.

vention, we'd never get the guy out of the house.

But lastly, let us not forget the most important factor, the added safety a ham radio station gives to the home. Just picture this:

The night is dark. You are alone. (Never mind why, just suppose!) The TV program is suddenly interrupted with this urgent message: "There has been a prison break at Upper State. Dangerous criminals are at large."

Upper State Prison is only about 250 miles from your house—they may be heading your way! First you shrug off the possibility; but then you hear a strange noise outside. You're frightened. You rush to the telephone. Horrors! The line is dead—someone cut it!

But ah! This is where ham radio will save you. Just turn the transmitter on (of course he showed you how) and call "Mayday! Mayday!"

And what will happen?

You'll probably blow a fuse.

VIKING—SB-10 [from page 34]

on, but a word of caution. Beg, borrow or buy, a scope, if you don't already have one, at least until you get oriented on how to run this beast. If it is run properly, it will do a creditable job, while on the other hand, it will put out some atrocious sounds if not properly adjusted. On our unit, with a number of mikes, we found that the gain control could not be advanced beyond 9 o'clock when it was set for off at 7 o'clock.

If you have the meter on the SB-10 set for 60 maximum drive, it will seldom be necessary to talk it up over 35 to 40, in fact it will definitely not be desirable to get it up over that level. A scope is the best indication of what is going on, and one cannot be recommended highly enough.

Make the interconnections to the receiver, antenna, and antenna switching circuit, if any, and you are in business. Adjust the voice control adjustments so they work satisfactorily and enjoy something new in amateur radio.

SB-10 Modifications

We found it desirable to make some changes in the audio section of the SB-10 also. These changes are listed as follows and shown in fig. 6.

1—At the mike connector, install a 47,000 ohm 1/2 watt resistor inside the connector between it and the wire that normally went into the connector.

2—At the plate (pin 1) of the 12AX7 audio amplifier, install a .01 disc ceramic in parallel with the one already there (.001).

3—At the other plate (pin 6), same tube, install a .01 disc ceramic condenser in parallel with the .001 already there.

4—At the audio gain control, remove the


Wire from the center terminal and install a 47,000 ohm $\frac{1}{2}$ watt resistor between the wire and the center terminal.

At pin 2 of the audio driver (12AT7) install a 330 mmf disc ceramic to ground.

At the plate of the audio driver (12AT7) pin 1) Install a .005 disc ceramic to ground.

The reasons for these changes are as follows: The 47,000 ohm resistor at the mike connector, along with the 100 mmf condenser at the tube grid, plus the shunt capacity of the associated circuit form a low pass filter which reduces the possibility of *rf* feedback and recirculation in the first audio. The .01 condensers will improve the low frequency response, possibly more than you wish, but we liked the results. The 47,000 ohm resistor at the audio gain control, along with the 330 mmf shunt condenser will somewhat reduce the high frequency response, as will the .005 condenser at the plate of the audio driver stage. With these changes the audio response was about equal at 200 and 5000 and nearly flat from 400 to 3000 cycles.

These changes were made before we received the modification notice from Heath with regard to the same problem. Their changes were not tried. I had an opportunity to check the audio quality of the SB-10 against my 10A and local reports were to the effect that the SB-10 sounded more natural, indicating a wider frequency response. ■

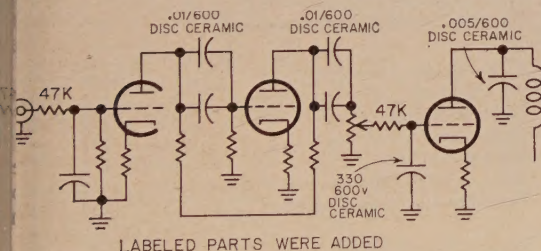

Labeled parts were added

Fig. 6—SB-10 modifications.

Parts List

- 2—125 mf 450 volt electrolytics. Sprague TVL 1760.
- 1—40-40 mfd 450 volt electrolytic tubular.
- 2—100,000 ohm 2 w carbon.
- 1—2700 ohm 2 w carbon (R-17).
- 1—1800 ohm 2 w carbon (R-16).
- 1—3300 ohm 2 w carbon (R-15).
- 1—200 mmf 600 volt mica.
- 1—330 mmf 600 volt disc ceramic.
- 1—.005 mf 600 volt disc ceramic.
- 2—.01 mf 600 volt disc ceramic.
- 2—47,000 ohm $\frac{1}{2}$ watt carbon.
- 1—2.5 mh 125 ma rfc.
- 1—octal plug chassis mounting type for vfo power adapter, if needed.
- 2—octal sockets chassis mounting type for vfo power adapter, if needed.

Parts list for those who do not use the Heath Conversion Kit MK-1.

2, 6, 10 — Meter MOBILE EQUIPMENT

MOTOROLA, R.C.A., G.E., LINK, etc. 30-50 Mc., 152-172 Mc. Used Commercial F.M. Communications Equipment Bought & Sold. Complete two-way sets meeting F.C.C. Licensing Requirements for taxicabs, Police, Fire, etc. \$169.00 and up.

Motorola F.M. Receivers, Double Conversion \$55.00 each
Motorola F.M. Transmitters..... 45.00 each

COMMUNICATIONS ASSOCIATES INC.

21-27 Batchelder Street
Boston 19, Mass.



IF YOUR TOWER AIN'T GOT DIAGONAL BRACING

It Ain't Got

*** ITQ**

INERT TORSIONAL QUALITY
"Diagonal bracing resists twisting caused by constant starting and stopping of large rotary beams. Also twisting of tower caused by gusty winds . . . All E-Z Way Towers got "IT Q".


Write for free literature!
E-Z Way Towers
P. O. Box 5491 Tampa, Florida

EASY TO LEARN CODE

It is easy and pleasant to learn or increase speed the modern way—with an Instructograph Code Teacher. Excellent for the beginner or advanced student. A quick, practical and dependable method. Available tapes from beginning's alphabet to typical messages on all subjects. Speed range 5 to 40 WPM. Always ready, no QRM, beats having someone send to you.

ENDORSED BY THOUSANDS!

The Instructograph Code Teacher literally takes the place of an operator-instructor and enables anyone to learn and master code without further assistance. Thousands of successful operators have "acquired the code" with the Instructograph System. Write today for full particulars and convenient rental plans.



INSTRUCTOGRAPH COMPANY

4711 SHERIDAN RD., CHICAGO 40, ILL.
357 West Manchester Ave., Los Angeles 3, Calif.


W1MZB TRI-BAND-QUAD

COMPLETE PLANS \$1.00

No Stubs — 10 DB FWD Gain.
S. W. R. 1.5:1 — 25 DB F To B.
Very Broad — 30 Lbs. Max.

BARRINGTON SPECIALTIES

Box 154
Barrington, R. I.



Telrex I75 RIS

- ★ 2 Stage Boston Gear Reducer
- ★ 1/12 H.P. Motor
- ★ Selsyn Indicator

\$198⁵⁰

TELREX LABORATORIES
ASBURY PARK 40, N. J., U. S. A.

— the
finest
low cost
rotator
on the
market!

Advertising Index

ACF Industries, Inc.	110
Allied Radio Corp.	128
Almo Radio Company	99
Amateur Electronic Supply	120
American Crystal Company	118, 123

Barker & Williamson, Inc.	19
Barrington Specialties	125
Barry Electronics Corp.	116, 117
Burstein-Applebee Co.	115

Cambridge Thermionic Corp.	20
Central Electronics, Inc.	23
Centralab	12
Cleveland Institute of Electronics	10
Collins Radio Company	Cover 2
Communications Associates	125
Cosmos Industries, Inc.	24
CQ Amateur Radio License Guide	82
CQ Back Issues	106
CQ Ham Shop	102, 103
CQ Subscription Ad	109
CQ's Surplus Schematic Handbook	82

Delehanty Institute	118
Dow-Key Company, Inc.	114

E-Z Way Towers, Inc.	114, 124, 125
Editors & Engineers, Ltd.	121
EICO	16
Eitel-McCullough, Inc.	25
Empire Electronics	108
Esse Radio Company	123

Fair Radio Sales	124
------------------	-----

Globe Electronics	21
Gonset Company	15
Greenlee Tool Company	112

Hallicrafters Company	11
Hammarlund Mfg. Co., Inc.	13
Harvey Radio Company, Inc.	97
Heath Company	4, 5, 6, 7, 8
Henry Radio Stores	95
Hornet Antenna Products Co.	112
House of Antennas, The	122, 124

Instructograph Company	125
International Crystal Co.	27
Irving Electronics	107

Johnson, E. F. Co.	28, 29
--------------------	--------

Lakeshore Industries	105
----------------------	-----

Lampkin Laboratories, Inc.	124
----------------------------	-----

Mil-E Supply Co.	118
Millen, James Mfg. Co., Inc.	2
Mini-Products, Inc.	26
Mosley Electronics, Inc.	17
Multi-Products Company	101

National Company, Inc.	Cover 3
Nelson Publishing Company	123

P & H Electronics	101
Palmer, Joe	111
Petersen Radio Company, Inc.	1
Precision Communications Accessories	122

RCA, Electron Tube Div.	Cover 4
RW Electronics	106
Radio Bookshop	100
Radio Shack Corp.	119
Rameco Products	113
Rider, John F. Publisher, Inc.	104
Rohn Manufacturing Company	120

Shure Brothers, Inc.	18
Skylane Products	121

TAB	127
Telex, Inc.	105
Telrex, Inc.	109, 118, 125
Texas Crystals	100
Transpace, Inc.	107
Triad Transformer Corp.	14
Tri-Ex Tower Corp.	94
Turner Microphone Co.	22
Trading Post	
H & H Electronic Supply Inc.	111

U. S. Crystals, Inc.	96
United Catalog Publishers, Inc.	98

Vibroplex Co., Inc.	122, 123
---------------------	----------

Western Radio Company	122
World Radio Labs, Inc.	93

READER SERVICE

CQ Magazine, Dept. RS

300 WEST 43rd STREET
New York 36, N. Y.

Coupon B
Void after
Feb. 25, 1960



Please send me information on your ads in
the February 1960 CQ keyed as follows:

1	2	3	4	5	6	7	8	9		
10	11	12	13	14	15	16	17	18		
19	20	21	22	23	24	25	26	27	A	B
28	29	30	31	32	33	34	35	36	C	D
37	38	39	40	41	42	43	44	45		E
46	47	48	49	50	51	52	53	54		

NAME _____
(Please Print)

Call _____ Engineer ☐


Type of work (specify) _____

ADDRESS _____

CITY _____

ZONE _____ STATE _____

"TAB" CONVERTER TRANSISTORIZED DC TO DC POWER 150V DC HI-EFFICIENCY KIT or BUILT!



Output 450 & TAP 250VDC at up to 150 MA/Up to 70 Watts 80% efficiency: ripple <2%; low idle current one amp silicon rectifiers, oil condensers, toroid transformer, fused & shielded, proof Regulation 5% at 20 to 100% load! Small in size! Quiet! Light wgt! Lo-priced get "TAB" TABT245CB built \$38. Pre-Assembled U-Built kit TR1245CK Only \$33. Six V Inpt. TR1645CB \$38 or Kit TR1645CK \$33. "TABSTAB" 250VDC @ 100MA/12V in TR1225CB \$30. Kit TR1225CK \$27. 6V npt TR1625CB \$30. Kit TR1625CK \$27.

SELENIUM F.W. BRIDGE RECTIFIERS

DC AMP	18VAC 14VDC	36VAC 28VDC	72VAC 54VDC	130VAC 100VDC
1/2	\$1.00	\$1.90	\$3.85	\$5.00
1	1.30	2.00	4.90	8.15
2	2.15	3.00	6.25	11.10
3	2.90	4.00	8.60	13.45
6	4.15	8.00	18.75	31.90
12	6.15	12.15	26.30	41.60
20	12.85	24.60		43.45
24	15.00	29.45		


New "TABTRAN" Rectifier Xfmr's

See'd Vols (DUAL) 0-9-15-18-18-0-9-15-18-18 Series Sec'ds 0-3-6-9-12-18-21-24-27-30-33-36 Vols.

DC POWER SUPPLIES for TRANSISTORS!

New low-cost filtered 0.5% Ripple Power Supply. Same as specified in Transistor Manual G.E. Ideal for Powering transistor circuits, small in size!

12VDC at 150Ma- \$8
T12V150M
25VDC at 150Ma- \$10
T25V150M
40VDC at 1 Amp- \$19
T40V1A



"TAB"—THAT'S A BUY!—BARGAINS!

IRISH/MYLAIR Tube 2400 ft. 3/\$12
CONDOR OIL/W.E. 2nd/600WVDC 6/51
SNOOPERSCOPE TUBE 2" \$5.00 @ 2/59
MINI-FAV 6 or 12VAC/60CYS \$2.00, 3/55
NEW PRINT CKT-PANEL, 11x12x.062" \$2
IRISH Tube 1200" Hqlyt. 3 for \$5
BANDPASS 60 or 90 or 150 Cys each \$2
IN34A 45¢ @, 15/35; IN35 51¢; IN38 70¢ @;
XTAL OVEN—115V/Thermostat \$3.98
Blower 24VDC/100CFM \$3.98
Blower AC/Miniature 6&12VAC \$1.00

Xmitting Mic's .006 @ 2500V, 5 for \$1.00
Miller 2.5MH/2.5A5Mtr Chokes \$8/1.00
Vibrators 6 or 12VDC \$1.49 @; 4/55
New Variacs/or equiv 0-135V/7.5A \$15.30
New Variacs/or equiv 0-135V/5Amp \$10.65
New Variacs/or equiv 0-132V/1.25A \$7.25
RF-MTR G6/475 Ma & 5 Amp \$4.00 @ 2/57
DC-METER Dejar 800 Ma/3 1/2" \$3.00 @ 2/55
DC-METER One Ma/4" Rd. \$5.00 @ 2/58
RF-MTR Weston 750Ma/TC. \$4.00 @ 2/56
DC MTR 100Ma/2 1/2" \$3.00 @ 2/55

BC898/3 to 4 mc's good condition \$5.95
AN-AR12/RCVR less tubes A-1 cndtn \$1.95
RDZ/USN 200-400 Mcs Revers As Is \$25
RAX/MIN revr convs 4 bands 1.5 to 9 Mc
G.E. YRS-1 Side Band Selector \$45
\$20B Socket 85¢, 2/51.50, 813 Socket \$1
4x150 Ceramic/LOKTAL 2 for \$1.00
W.E. 416B Higain-HiMu \$4

NEW BATTERY CHARGER!!!

FOR 2V OR 4V OR 6V OR 12 VOLT
BATTERIES, TRICKLE & FULL
CHARGE up to 4 AMP

Charges 2-4-6-12 volt batteries.
Built BCK-1 \$13.50



"TAB" GUARANTEED XTALS!

HAM BAND 80 or 40Mtrs \$1 @
NOVICE BAND \$1 @
CITIZENS BAND \$3 @
Include 1st, 2nd, 3rd & 4th choice!
On XTALS!

*Postpaid 48 States XTALS Only
Send 25¢ for Catalog

Wanted 304TL Tubes & ALL TYPES!!!

"TAB" THAT'S A BUY

"TAB" Tubes Tested, Inspected, Boxed
Six Months Guaranteed! No Rejects!

GOVT & MFGRS Surplus! New & Used

OB2	.65	6C5	.69	43	.49
OC3	.70	6C6	1.08	45	.44
OD3	.50	6C8	1.08	50L6	.63
OZ4	.60	We Trade!		RK59	1.39
IA7	.90	6CB6	.89	RK60	1.17
IB3	.78	6CD6	1.49	HY69	2.20
IL4	.82	6CF6	.85	75	5.80
IR4	5/51	6CL6	1.40	HY75	5.00

We Swap Tubes! What Do U Have?

IS4	.78	6CB6	.89	4XR60A	37.50
IS5	.68	6CB6	.79	4X125	27.50
IT4	.85	6CS6	.70	4X150	15.00
IT5	.95	6C6U6	1.29	4X250B	41.00
IU4	6/81	6D6	.99	4A00A	41.75
IU5	.75	6E5	.79	4E27A	39.00
IX2	.99	F4	2.40	250TL	19.45
2C39A	9.00	F5	.51	307A	2/51
2C40	5.50	6F6	.99	VR92	5/51

Send 25¢ for Catalog!

2C43	6.50	6F7	.99	388A	3/51
2C51	2.00	6F8	1.39	350A	2.45
2D21	.65	6H6	.59	350B	1.75
2E22	1.75	6J4	1.75	371B	.95
2E24	1.90	6J5	.79	6146	3.90
2E25	2.50	6J6	.59	6146	3.90
2E26	2.75	6J7	.99	416B	16.00
2E30	1.70	6J8	1.30	450TH	43.00
2E35	1.60	6K6	.59	450TL	43.00
2K25	9.75	6K7	.79	460	11.50

All Tubes Stocked at Low Prices!

2K26	34.00	6K8	.99	703A	2.00
2K28	30.00	6K9	1.19	703B	2.00
2V3	2/51	6N7	.79	710C	10.90
2V2	.48	6T8	.98	717A	5/81
3A4	.70	6V6GT	.90	723AB	5.00
3A5	1.00	6X5	.49	723A	2.75
3AP1	5.95	12AT6	.59	803	3.50
3BP1	3.50	12AU6	.89	804	8.85
3C2	9.00	12AU6	.69	805	6.00
3D23	3.95	12AU7	.69		

We Buy! We Sell! We Trade!

3E29	6.00	12AX7	.79	807	1.10
3E4	.68	12AY7	1.29	5/85, 10/812	
3Q5	.86	12B4	.95	811	3.45
4-65A	13.50	12BA6	.95	812	3.40
4-125A	27.50	12BA7	.99	812A	4.31
4-250A	34.00	12BD6	.59	813	8.00
4X150A	7.00	12BE6	.59	815	3.15
4X230	36.00	12B6	.79	826	.59
4X300	37.00	12BH7	.59		
5AP1	2.95	12BY7	1.00		

Wanted Test Sets and Equipment

5BP1	5.02	12BZ7	.99	828	9.00
5BP4	5.00	12H6	.75	829B	8.00
5CP1	4.99	12J5	.69	832A	6.00
5CP7	9.00	12J7	.69	833A	36.00
5R4	1.00	12K8	.89	866A	2.45
5R4	.75	12SA7	.69	954	10/81
5V4	.89	12SC7	.89	955	3/81
5Y3	.60	12SF5	.69	957	3/81
5Z3	.89	12SG7	.89	958A	2/81

Send 25¢ for Catalog!

15GP27	89.00	12SH7	.59	991	5/51
6A7	1.00	12SL7	.59	1614	2.75
6B4	.99	12SL7	.59	1619	5/81
6AC7	.72	12SL7	.79	1620	2.00
6A65	.65	12SQ7	.69	1625	5/81
6A67	.75	12SR7	.69	1626	5/81
6AK5	.89	15E	.89	1629	4/81
6AL5	.69	F4G17	3.49	2050	2/82
6A05	.59			5517	3.25

To \$5.00 Paid for 304TL tubes

GAR6	1.95	1A7B	1.16	5618	3.25
GAS7	3.49	24G	3.50	5651	1.35
GAT6	2/81	25A6	1.19	5654	1.20
GAU6	.79	25A7	2.19	5656	4.25
GB8	1.35	25C5	.81	5670	1.15
GBA6	.59	25L6	.72	5672	.90
GBE6	.59	25T	4.00	5686	1.75
GBG6	1.49	25Z5	.72	5687	1.15
GBH6	.79	25Z6	.75	5691	4.70
GBJ6	.72	26A7	3.69	5725	1.95

Top \$5.00 Paid for XMTIR Tubes!

6BK7	.99	F627	8.28	5732	2.00
6BL7	1.35	HV27	19.39	5736	35.00
6BN4	.69	F627	.89	5749	1.95
6BN6	1.08	EL34	3.49	5750	2.00
6BN7	.69	35A5	.69	5814	1.25
6BQ5	1.19	35L6	.59	5879	1.20
6BQ7	.79	35T	4.49	5894	\$12.00
6BX7	1.11	35Z5	.89		
6BY3	.19	RK39	2.99		
6BZ6	.99				

No See—Write!

TERMS: Min Order \$3-25% with order F.O.B. New York
Ten day money back guarantee price of mdse. only. Our 15th year.

Prices shown are subject to change.

111CD Liberty St., N. Y., 6, N. Y. RE 2-6245

Leece Neville Charger Systems "SILTAB" Silicon Rectifier Replacement Non-Aging Hermetically Sealed FOR 6 or 12VDC @ 100A, Type YJ9 \$24

*New Silicon 500Ma Rectifiers, Working Range RMS-ACV Input!

rms/piv	rms/piv	rms/piv	rms/piv
35/50	70/100	140/200	210/300
30¢	45¢	50¢	65¢
rms/piv	rms/piv	rms/piv	rms/piv
280/400	350/500	420/600	490/700
78¢	\$1.00	\$1.26	\$1.50
rms/piv	rms/piv	rms/piv	rms/piv
639/900	770/1000	70/1100	
\$1.59	\$1.89	\$2.58	\$3.12

Use in Bridge or C.T. up to 750ma dc

GENERAL PURPOSE & REPLACEMENT

*Silicon 400PIV. at 250 Ma Rectifiers
Hi-Temp 106°C at 252V/RMS. Special 2 for \$1; 25 for \$10.

Topbar's Postpaid 48 states orders \$10.

Silicon 866A Tube Replacement Rectifier Rated 3000 Ma at 4500V-RMS or 6400PIV. Operates —65 to +165°C. Max 12.5 VDC Drop 300Ma "VACADAC" ST866.

Each \$16.
5u4 or Equiv. 1600PIV/1100 RMS at 750Ma. ST5u4 \$9



RECTIFIERS 130V/RMS HALF-WAVE

75Ma 49¢, 5 for \$2; 100Ma 59¢, 6 for \$3
150Ma 70¢, 8 for \$5; 250Ma 79¢, 6 for \$4
300Ma 88¢, 5 for \$4; 350Ma \$1.00, 8 for \$7
400Ma \$1.10, 5 for \$5; 500Ma \$1.35, 5 for \$5
This Item P.P.d. 48 states orders \$10.

**"TAB" for NEW TRANSISTORS!

2N38	\$.98	2N244	\$5.00	2N441	\$3.00
2N155	3.25	2N256	1.45	2N234A	1.36
2N156	4.45	2N277	4.50	2N422	5.00
2N174	12.00	2N278	5.50	CK722	.95

*Postpaid 48 States Orders \$10

"TAB" for THE BEST KITS!

Kit 1	500 Log & Eyeglass
Kit 2	10 Transistors
Kit 3	10 Transistors
Kit 4	10 Transistors
Kit 5	10 Transistors
Kit 6	10 Transistors
Kit 7	10 Transistors
Kit 8	10 Transistors
Kit 9	10 Transistors
Kit 10	10 Transistors
Kit 11	10 Transistors
Kit 12	10 Transistors
Kit 13	10 Transistors
Kit 14	10 Transistors
Kit 15	10 Transistors
Kit 16	10 Transistors
Kit 17	10 Transistors
Kit 18	10 Transistors
Kit 19	10 Transistors
Kit 20	10 Transistors
Kit 21	10 Transistors
Kit 22	10 Transistors
Kit 23	10 Transistors
Kit 24	10 Transistors
Kit 25	10 Transistors
Kit 26	10 Transistors
Kit 27	10 Transistors
Kit 28	10 Transistors
Kit 29	10 Transistors
Kit 30	10 Transistors
Kit 31	10 Transistors
Kit 32	10 Transistors
Kit 33	10 Transistors
Kit 34	10 Transistors
Kit 35	10 Transistors
Kit 36	10 Transistors
Kit 37	10 Transistors
Kit 38	10 Transistors
Kit 39	10 Transistors
Kit 40	10 Transistors
Kit 41	10 Transistors
Kit 42	10 Transistors
Kit 43	10 Transistors
Kit 44	10 Transistors
Kit 45	10 Transistors
Kit 46	10 Transistors
Kit 47	10 Transistors
Kit 48	10 Transistors
Kit 49	10 Transistors
Kit 50	10 Transistors

ONE EACH ABOVE KIT ONLY

99c

Kit 51 10 Transistors

Kit 52 10 Transistors

Kit 53 10 Transistors

Kit 54 10 Transistors

Kit 55 10 Transistors

Kit 56 10 Transistors

Kit 57 10 Transistors

Kit 58 10 Transistors

Kit 59 10 Transistors

Kit 60 10 Transistors

Kit 61 10 Transistors

Kit 62 10 Transistors

Kit 63 10 Transistors

Kit 64 10 Transistors

Kit 65 10 Transistors

KITS! Each "TAB" Kit Contains The Finest Selection!!!


NEW HALLICRAFTER HT-37 TRANSMITTER

ANOTD
RCA



Inside view of the HT-37, showing the two RCA-6146's in parallel in the linear final.

***Every Tube
is RCA...***
from VFO to the 6146 Final

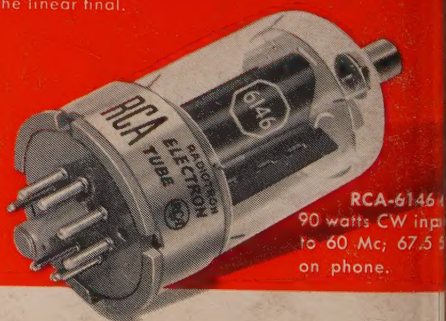

RCA-6146
90 watts CW input
to 60 Mc; 67.5
on phone.

Pictured here is one of the newest, most modern SSB-AM-CW transmitters in amateur radio. It's the medium-power 10-to-80 meter HT-37. RCA is proud that Hallicrafter designers specified an RCA tube for every stage in this outstanding 18-tube rig—including the linear final!

Operating today in hundreds of thousands of communications equipment throughout the world, RCA tubes have earned a reputation for high reliability *right in the circuit!* Emission capability is second to none—even after long periods of demand-

ing operation. High uniformity of tube characteristics during life does away with circuit "touch-up", while high uniformity of characteristics from tube to tube enables you to replace tubes without major tune-up. And conservative ratings pay off in more operating hours for your tube dollar.

Whether you design or whether you re-tube, you'll do better every time—with "RCA's" in the sockets! Your RCA Industrial Tube Distributor handles all RCA types used in the amateur station.



RADIO CORPORATION OF AMERICA